

THE REFERENCE GUIDE ON WATER TREATMENT
FOR INSTALLERS AND DESIGNERS



Guidacqua 2019

Untreated water will be
your worst enemy over time

Systems will be scaled, energy and money wasted

**THE EFFICIENCY OF YOUR SYSTEM
RESTORED AND PROTECTED WITH GEL**



2017 GEL SpA

AIM Italia Stock Exchange – Milan



*"Where you see water,
we see 40 years of growth"*



Index of categories

FILTERING	5	DOSING	45
Security filters	6	Anti scale Dosing units	46
Acquablock	6	Zerocal ⁺ Mini	46
Depura Baby	7	Zerocal ⁺ Maxi	48
Depura 500	8	Dosaphos	50
Depura 550	9	Zerocal ⁺ Plant <i>new</i>	52
Depura 700	10	Dosaphos Plant 600/700	52
Depura 1000	11	Spare parts and accessories for dosing units	53
Depura 3000	12	Magnetic scale reducers	54
Depura Vortex	13	Antikal	54
Depura Vortex OT MF	14	Metering pumps	55
Depura Vortex Automatic	15	Dosamatic PC / PCse / PCS / PCSse	55
Depura Cyclon Baby	16	Dosamatic PP / PPse / PPI / PPIse	56
Depura Cyclon 550	17	Spare parts and accessories for metering pumps	58
Depura Cyclon 700	18		
Depura Cyclon 1000	19	SANITIZATION	59
Depura Cyclon 3000	20	Anti legionella systems	60
Depura Cyclon XL	21	Dosasan	60
Depura Mini / Matic SI	22	Dosaclor	61
Depura AutoMatic	23	Dosaclor Duo	62
4" cartridges	24	Dosabios	63
5" cartridges	24	Dosabios Duo	64
7" cartridges	24	Biclor	65
10" cartridges	25	Gelclor	65
5" / 7" / 10" empty cartridges	25	Oxygel	65
Products for empty cartridges	25	Gelfilmex	65
Cartridges for Depura Vortex	26	Gel Peracetic	66
Spare parts and accessories for filters	26	Spare parts and accessories for anti legionella systems	66
Neutralizing filters for acidic condensates	27	UV sterilizers	67
Clear Acid Neutralizer	27	Gelpur Light	67
5 litre neutralizing filter	28	Spare parts and accessories for UV sterilizers	68
Consumables for neutralizing filters	28		
Water filters	29	REVERSE OSMOSIS	69
Deferr	29	Undercounter water purifiers	69
Desabb	30	Acquaclick	70
Declor	31	Gelpur Easy Carbon	71
Neutral	32	Gelpur SL 250	72
Denitrat	33	Spare parts and accessories for water purifiers	73
Dearsenic	34	RO systems	74
Spare parts and accessories for water filters	34	Gelpur OS	75
SOFTENING	35	Gel Antiscalant RO1	75
Water softeners	35	Gel Antiscalant RO2	75
DrySoft	36	Gel Washing Basic	75
Decalux	37	Gel Washing Acid	76
Decal	39	Saver Liquid	76
Duplex	42	Spare parts and accessories for Gelpur OS	76
Spare parts and accessories for water softeners	44		

POWER FLUSHING 77

Power flushing pumps	78
Superflush 40	78
Superflush 30	78
Boy Jet 4 Solar	78
Spare parts and accessories for pumps	79
Flushing chemicals	79
Long Life 300	79
Long Life 400 / 400 POCKET	79
Long Life 410 / 410 POCKET	80
Long Life 800	80
Long Life 200 Solar	80

CHEMICAL CONDITIONING 81

Filling units	82
MiniMag	82
Nembo KIT	83
Wheely Soft	84
Wheely Pure	84
Boy Jet 4 Solar	84
Air Force 1	84
Air Force 3	85
LL Mag Filter & 100 Combi KIT / LL Mag Filter KIT	85
Termo Tank	85
Termo Tank Filter	85
Consumables for Termo Tank Filter	86
Conditioning products	86
Long Life 100 / 100 POCKET	86
Poly AP	86
Long Life 100 COMBI	87
Long Life 200	87
Long Life 710 / 710 POCKET	87
Long Life Sealer	88
Long Life 500	88
Gel Termol ECO	88
Gel Termol AT / AT-20	89
Gel Termol GV / GV-20	89
Long Life 100 Solar	90
Gelphos L / L15	90
Biclor	90
Gelclor	91
Oxygel	91
Gel Peracetic	91
Gelfilmex	91
Gelcid	92
Poly Ice	92
Polyvapour	92

DESCALING 93

Descaling pumps	94
Baby 13	94
Boy C 15 Super	94
Boy C 30	94
Boy C Inverter	95
Boy C Matic	95
Boy C	95
Accessories for descaling pumps	96
Boy Jet 20 M	96
Air Force 1	96
Descaling and sanitizing chemicals	97
Boiler Cleaner DP	97
Boiler Cleaner ECO	97
Boiler Cleaner DE	97
Boiler Cleaner E	98
Boiler Cleaner LZ	98
Boiler Cleaner P / PZ	98
Boiler Cleaner N	99
Boiler Cleaner SAFE	99
Boiler Cleaner Economix	99
Boiler Cleaner Fumi Plus	100
Gelmix	100

OVER THE COUNTER TECHNICAL PRODUCTS 101

WC Cleaner	102
Climapur	102
Detex Plus	102
Cleaner DEC	103
Gelock	103
Gel Gas Detector	103
Gel Print	104
Gel Cleaner Spray	104
Hand Cleaner	104

METERS AND TEST KITS 105

Meters and test kits	106
----------------------	-----

REGULATIONS 109

Legionella Pneumophila	126
Regulations	127
Contacts	131
General Sales Conditions	132

Alphabetical index of products

5 litre neutralizing filter	28	Denitrat	33
Acquaclick	70	Depura 500	8
Acquablock	6	Depura 550	9
Air Force 1	84, 96	Depura 700	10
Air Force 3	85	Depura 1000	11
Antikal	54	Depura 3000	12
Baby 13	94	Depura AutoMatic	23
Biclor	65, 90	Depura Baby	7
Boiler Cleaner DE	97	Depura Cyclon 550	17
Boiler Cleaner DP	97	Depura Cyclon 700	18
Boiler Cleaner E	98	Depura Cyclon 1000	19
Boiler Cleaner ECO	97	Depura Cyclon 3000	20
Boiler Cleaner Economix	99	Depura Cyclon Baby	16
Boiler Cleaner Fumi Plus	100	Depura Cyclon XL	21
Boiler Cleaner LZ	98	Depura Mini / Matic SI	22
Boiler Cleaner N	99	Depura Vortex	13
Boiler Cleaner P / PZ	98	Depura Vortex Automatic	15
Boiler Cleaner SAFE	99	Depura Vortex OT MF	14
Boy C	95	Desabb	30
Boy C 15 Super	94	Detex Plus	102
Boy C 30	94	Dosabios	63
Boy C Inverter	95	Dosabios Duo	64
Boy C Matic	95	Dosaclor	61
Boy Jet 4 Solar	78, 84	Dosaclor Duo	62
Boy Jet 20 M	96	Dosamatic PC / PCse / PCS / PCSse	55
Cartridges 4"	24	Dosamatic PP / PPse / PPI / PPIse	56
Cartridges 5"	24	Dosaphos 200/250/DIMA	50
Cartridges 7"	24	Dosaphos Plant 600/700	52
Cartridges 10"	25	Dosasan	60
Cartridges for Depura Vortex	26	DrySoft	37
Empty cartridges 5" / 7" / 10"	25	Duplex	43
Cleaner DEC	103	Gel Antiscalant RO1	75
Climapur	102	Gel Antiscalant RO2	75
Clear Acid Neutralizer	27	Gel Cleaner Spray	104
Dearsenic	34	Gel Gas Detector	103
Decal	40	Gel Peracetic	66, 91
Decalux	38	Gel Print	104
Declor	31	Gel Termol ECO	88
Deferr	29	Gel Termol AT / AT-20	89

Gel Termol GV / GV-20	89
Gel Washing Acid	76
Gel Washing Basic	75
Gelcid	92
Gelclor	65, 91
Gelfilmex	65, 91
Gelmix	100
Gelock	103
Gelphos L / L15	90
Gelphos P	53
Gelphos Rapid	53
Gelpur Easy Carbon	71
Gelpur Light	67
Gelpur OS	74
Gelpur SL 250	72
Hand Cleaner	104
KIT LL Mag Filter & 100 COMBI	85
KIT LL Mag Filter	85
Long Life 100 / 100 POCKET	86
Long Life 100 COMBI	87
Long Life 100 Solar	90
Long Life 200	87
Long Life 200 Solar	80
Long Life 300	79
Long Life 400 / 400 POCKET	79
Long Life 410 / 410 POCKET	80
Long Life 500	88
Long Life 710 / 710 POCKET	87
Long Life 800	80
Long Life Sealer	88
Meters and test kits	105
MiniMag	82
Nembo Kit	83
Neutral	32
Oxygel	65, 91
Poly AP	86
Poly Ice	92
Polyvapour	92
Saver Liquid	76

Superflush 30	78
Superflush 40	78
Termo Tank	85
Termo Tank Filter	85
WC Cleaner	102
Wheely Soft	84
Wheely Pure	84
Zerocal+ Dose	53
Zerocal+ Maxi	48
Zerocal+ Mini	46
Zerocal+ Plant <i>new</i>	52
Accessories for dosing units	53
Consumables for neutralizing filters	28
Consumables for Termo Tank Filter	86
Products for empty cartridges	25
Spare parts and accessories for anti legionella systems	66
Spare parts and accessories for filters	26
Spare parts and accessories for Gelpur OS	76
Spare parts and accessories for metering pumps	58
Spare parts and accessories for pumps	79, 96
Spare parts and accessories for UV sterilizers	68
Spare parts and accessories for water filters	34
Spare parts and accessories for water purifiers	73
Spare parts and accessories for water softeners	44



Filtering



Security filters

Acquablock / Depura / Depura Vortex / Depura Cyclon / Depura Mini / Depura Matic SI / Depura Automatic

6



Neutralizing filters

Clear Acid Neutralizer / Neutralizzatore 5 litres

27




Water filters

Deferr / Desabb / Declor / Neutral / Denitrat / Dearsenic

29

Acquablock

Anti flood security filters

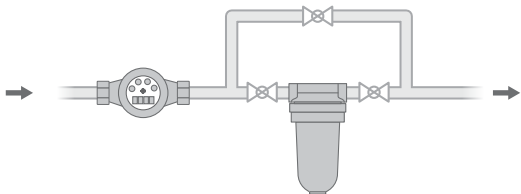

Acquablock is the innovative anti flood filter able to:

- operate as a security filter;
- detect any water leakages due to failures or unusual water consumptions (different from the irrigation and softening systems where fitted), immediately block water supply, thus protecting your home for 24 hours a day.

The anti flood system will start after 15 days of data automatic acquisition.

Acquablock does not require any power supply.

Acquablock filters are fitted with washable net cartridge in polypropylene 90 µm.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
		€	pcs.		head	housing	bar	m³/h	cm


WITH WASHABLE NET CARTRIDGE IN POLYPROPYLENE 90µm

ACQUABLOCK 7"	101.098.00	332,00	1	1" F	PP	SAN	6	2,00	15,5x36
ACQUABLOCK 10"	101.097.00	332,00	1	1" F	PP	SAN	6	2,00	15,5x43

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.; Battery: 4x1,5V lithium AA

Depura Baby

Standard security filters for 4" cartridges

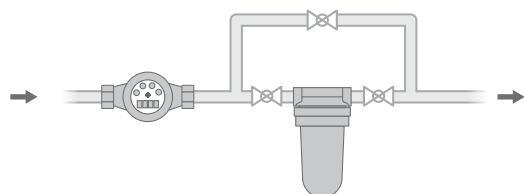

Depura Baby are standard security filters which remove sand and foreign bodies from water. They are used for civil, technical and industrial use. They are made up of head in brass and housing in SAN plastic material resistant to high pressure. Depura Baby filters are fitted with washable net filter cartridge in stainless steel 90µm, suitable for technical-potable use.

Ideal for small spaces.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		PN	FLOW RATE ($\Delta P=0,2$ bar)	DIMENS. ($\varnothing \times H$)
		€			head	housing			
			pcs.				bar	m ³ /h	cm


WITH WASHABLE NET CARTRIDGE IN STAINLESS STEEL 90µm

DEPURA BABY 1/2"	101.001.10	51,30	6	1/2" F	BRASS	SAN	10	1,1	8x16
DEPURA BABY 3/4"	101.001.20	51,30	6	3/4" F	BRASS	SAN	10	1,1	8x16

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Depura 500

Standard security filters for 5" cartridges

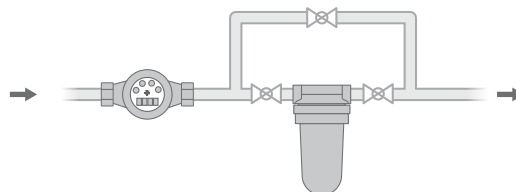

Depura 500 are standard security two-piece filters which remove sand and foreign bodies from water. They are used for civil, technical and industrial use. They are made up of head in polypropylene and housing in SAN plastic material, resistant to high pressure. Depura 500 filters can house the filter cartridges below:

- Washable net 5" PP 60µm
- Washable net 5" PP 90µm
- STAINLESS STEEL Washable net 5" 90µm
- FLAT STAINLESS STEEL Washable net 5" 90µm
- Wound cotton 5" PP 5µm
- Wound cotton 5" PP 20µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		PN	DIMENS. (ØxH)
		€			head	housing		


WITHOUT CARTRIDGE

DEPURA 500 1/2"	101.020.00	25,20	6	1/2" F	PP	SAN	10	12x19
-----------------	------------	-------	---	--------	----	-----	----	-------

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Depura 550

Standard security filters for 5" cartridges

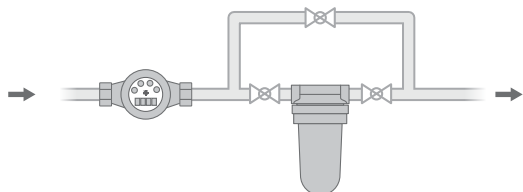

Depura 550 are standard security filters which remove sand and foreign bodies from water. They are used for civil, technical and industrial use. They are made up of head in brass or polypropylene and housing in SAN plastic material, resistant to high pressure, or Trogamid, resistant to high temperature too. Depura 550 filters can house the filter cartridges below:

- Washable net 5" PP 60µm
- Washable net 5" PP 90µm
- STAINLESS STEEL Washable net 5" 90µm
- FLAT STAINLESS STEEL Washable net 5" 90µm
- Wound cotton 5" PP 5µm
- Wound cotton 5" PP 20µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
					head	housing			
		€	pcs.				bar	m³/h	cm

WITH WASHABLE NET CARTRIDGE IN POLYPROPYLENE 90µm

DEPURA 550 L/PP 1/2"	101.026.8L	35,60	6	1/2" F	PP	SAN	10	2,25	13x22
DEPURA 550 L/PP 3/4"	101.027.0L	35,60	6	3/4" F	PP	SAN	10	2,75	13x22
DEPURA 550 L/PP 1"	101.027.5L	37,90	6	1" F	PP	SAN	10	3,75	13x22


WITHOUT CARTRIDGE

DEPURA 550 PP 1/2"	101.026.80	30,40	6	1/2"	PP	SAN	10	-	13x22
DEPURA 550 PP 3/4"	101.027.00	30,40	6	3/4"	PP	SAN	10	-	13x22
DEPURA 550 PP 1"	101.027.50	32,40	6	1"	PP	SAN	10	-	13x22
DEPURA 550 OT 3/4"	101.125.40	133,00	6	3/4"	BRASS	SAN	10	-	13x21
DEPURA 550 OT 1"	101.125.50	134,00	6	1"	BRASS	SAN	10	-	13x21
DEPURA 550 OTR 3/4"	101.125.70	149,00	6	3/4"	BRASS	TROG	16	-	13x21
DEPURA 550 OTR 1"	101.125.90	150,00	6	1"	BRASS	TROG	16	-	13x21

Use: tec/pot; Water Temperature: PP and OT 5-40 °C / OTR 5-80 °C; Ambient Temperature: 5-50 °C.

Depura 700

Standard security filters for 7" cartridges

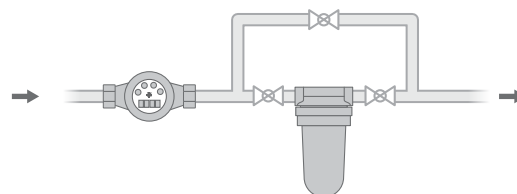

Depura 700 are standard security filters which remove sand and foreign bodies from water. They are used for civil, technical and industrial use. They are made up of head in brass or polypropylene and housing in SAN plastic material, resistant to high pressure, or Trogamid, resistant to high temperature too. Depura 700 filters can house the filter cartridges below:

- Washable net 7" PP 60µm
- Washable net 7" PP 90µm
- STAINLESS STEEL Washable net 7" 90µm
- FLAT STAINLESS STEEL Washable net 7" 90µm
- Wound cotton 7" PP 5µm
- Wound cotton 7" PP 20µm

Having a larger filter surface than Depura 550, the washing frequency of the cartridge is reduced.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
					head	housing			
		€	pcs.				bar	m³/h	cm

WITH WASHABLE NET CARTRIDGE IN POLYPROPYLENE 90µm

DEPURA 700 L/PP 1/2"	101.029.8L	38,00	6	1/2" F	PP	SAN	10	2,25	13x26
DEPURA 700 L/PP 3/4"	101.030.0L	38,00	6	3/4" F	PP	SAN	10	2,75	13x26
DEPURA 700 L/PP 1"	101.050.0L	38,00	6	1" F	PP	SAN	10	3,75	13x26


WITHOUT CARTRIDGE

DEPURA 700 PP 1/2"	101.029.80	32,30	6	1/2"	PP	SAN	10	-	13x26
DEPURA 700 PP 3/4"	101.030.00	32,30	6	3/4"	PP	SAN	10	-	13x26
DEPURA 700 PP 1"	101.050.00	34,30	6	1"	PP	SAN	10	-	13x26
DEPURA 700 OT 3/4"	101.128.00	133,00	6	3/4"	BRASS	SAN	10	-	13x25
DEPURA 700 OT 1"	101.130.00	134,00	6	1"	BRASS	SAN	10	-	13x25
DEPURA 700 OTR 3/4"	101.139.80	152,00	6	3/4"	BRASS	TROG	16	-	13x25
DEPURA 700 OTR 1"	101.140.00	153,00	6	1"	BRASS	TROG	16	-	13x25

Use: tec/pot; Water Temperature: PP and OT 5-40 °C / OTR 5-80 °C; Ambient Temperature: 5-50 °C.

Depura 1000

Standard security filters for 10" cartridges

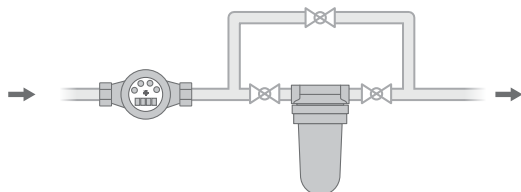

Depura 1000 are standard security filters which remove sand and foreign bodies from water. They are used for civil, technical and industrial use. They are made up of head in brass or polypropylene and housing in SAN plastic material, resistant to high pressure, or Trogamid, resistant to high temperature too. Depura 700 filters can house the filter cartridges below:

- Washable net 10" PP 60µm
- Washable net 10" PP 90µm
- STAINLESS STEEL Washable net 10" 90µm
- FLAT STAINLESS STEEL Washable net 10" 90µm
- Wound cotton 10" PP 5µm
- Wound cotton 10" PP 20µm

Having a larger filter surface than Depura 1000, the washing frequency of the cartridge is reduced.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		PN	FLOW RATE ($\Delta P=0,2$ bar)	DIMENS. ($\varnothing \times H$)
		€	pcs.		head	housing	bar	m ³ /h	cm

WITH WASHABLE NET CARTRIDGE IN POLYPROPYLENE 90µm

DEPURA 1000 L/PP 1/2"	101.080.0L	40,60	6	1/2" F	PP	SAN	10	2,25	13x33
DEPURA 1000 L/PP 3/4"	101.070.0L	40,60	6	3/4" F	PP	SAN	10	2,75	13x33
DEPURA 1000 L/PP 1"	101.090.0L	42,60	6	1" F	PP	SAN	10	3,75	13x33


WITHOUT CARTRIDGE

DEPURA 1000 PP 1/2"	101.080.00	34,10	6	1/2"	PP	SAN	10	-	13x33
DEPURA 1000 PP 3/4"	101.070.00	34,10	6	3/4"	PP	SAN	10	-	13x33
DEPURA 1000 PP 1"	101.090.00	36,10	6	1"	PP	SAN	10	-	13x33
DEPURA 1000 OT 3/4"	101.130.80	135,00	6	3/4"	BRASS	SAN	10	-	13x32
DEPURA 1000 OT 1"	101.131.00	136,00	6	1"	BRASS	SAN	10	-	13x32
DEPURA 1000 OTR 3/4"	101.140.80	156,00	6	3/4"	BRASS	TROG	16	-	13x32
DEPURA 1000 OTR 1"	101.141.00	157,00	6	1"	BRASS	TROG	16	-	13x32

Use: tec/pot; Water Temperature: PP and OT 5-40 °C / OTR 5-80 °C; Ambient Temperature: 5-50 °C.

Depura 3000

Standard security filters for 10" cartridges

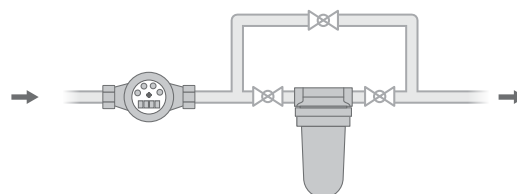

Depura 3000 are standard security filters which remove sand and foreign bodies from water. They are used for civil, technical and industrial use. They are made up of head in brass and housing in SAN plastic material, resistant to high pressure, or Trogamid, resistant to high temperature too. Depura 3000 filters can house the filter cartridges below:

- Washable net 10"/3 PP 90µm
- STAINLESS STEEL washable net 10"/3 90µm
- FLAT STAINLESS STEEL washable net 10"/3 90µm
- Wound cotton 10"/3 PP 20µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
					head	housing			
		€	pcs.				bar	m³/h	cm

WITH WASHABLE NET CARTRIDGE IN POLYPROPYLENE 90µm

DEPURA 3000 L/OTR 1 ½"	101.142.0L	224,00	1	1 ½"F	BRASS	TROG	16	10,5	16x36
DEPURA 3000 L/OTR 2"	101.143.0L	225,00	1	2" F	BRASS	TROG	16	11,5	16x36

WITHOUT CARTRIDGE

DEPURA 3000 OT 1 ½"	101.150.00	185,00	1	1 ½"	BRASS	SAN	10	-	16x36
DEPURA 3000 OTR 1 ½"	101.142.00	216,00	1	1 ½"	BRASS	TROG	16	-	16x36
DEPURA 3000 OT 2"	101.170.00	186,00	1	2"	BRASS	SAN	10	-	16x36
DEPURA 3000 OTR 2"	101.143.00	217,00	1	2"	BRASS	TROG	16	-	16x36

Use: tec/pot; Water Temperature: OT 5-40 °C / OTR 5-80 °C; Ambient Temperature: 5-50 °C.

Depura Vortex

Manual self cleaning filters with cyclone washing and in-line connections



Depura Vortex are **manual, self cleaning security filters with cyclone washing and in-line connections**. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional filter inexpedient. The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing).

- Depura Vortex OX are equipped with **built-in pressure reducer** and are made up of **head in stainless steel, housing in technopolymer**, with high physical and mechanical features, and **food grade stainless steel washable net with 60 µm degree of filtration**.
- Depura Vortex PL are made up of **head and housing in technopolymer**, with high physical and mechanical features, and **food grade stainless steel washable net with 75 µm degree of filtration**.
- Depura Vortex OT are made up of **head in brass, housing in technopolymer**, with high physical and mechanical features, and **food grade stainless steel washable net with 75 µm degree of filtration**.


The above mentioned units are manufactured with top quality materials, certified for food use.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		FILTRATION	PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (HxLxP)
		€			HEAD/HOUSING	CARTRIDGE	µm			
DEPURA VORTEX OX	101.064.60	185,00	1	3/4" - 1" M	ST. STEEL 304	ST. STEEL 304	60	20	2,8	310x92x57
DEPURA VORTEX PL	101.064.10	212,00	1	3/4" - 1" 1/4 M	TECHNOPOLYMER	ST. STEEL 304	75	20	3,2	365x110x79
DEPURA VORTEX OT	101.064.30	321,00	1	3/4" - 1" F	BRASS	ST. STEEL 304	75	20	2,8	285x106x67

Use: tec/pot; Water temperature 5-40 °C; Ambient temperature: 5-50 °C.

Depura Vortex OT MF

Manual self cleaning filters with cyclone washing and in-line connections with built-in pressure reducer

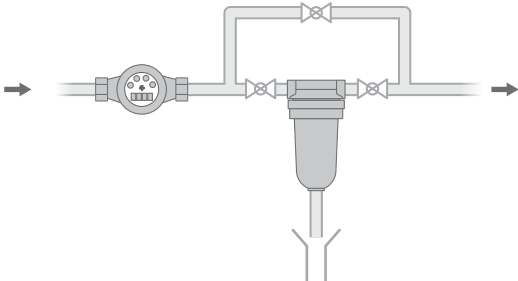

Depura Vortex OT MF are **manual, self cleaning security filters, with cyclone washing, in-line connections and built-in pressure reducer**. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional filter inexpedient. The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing).

Depura Vortex OT MF are made up of **head and housing in technopolymer**, with high physical and mechanical features, and **food grade stainless steel washable net** with 75 µm degree of filtration.


The above mentioned units are manufactured with top quality materials, certified for food use.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		FILTRATION	PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (HxLxP)
		€	pcs.		HEAD/HOUSING	CARTRIDGE				
DEPURA VORTEX OT MF	101.064.90	424,00	1	3/4" - 1"1/4 M	TECHNOPOLYMER/ TECHNOPOLYMER	ST. STEEL 304	75	20	2,8	390x120x67

Use: tec/pot; Water temperature 5-40 °C; Ambient temperature: 5-50 °C.

Depura Vortex Automatic

Automatic self cleaning filters with cyclone washing and in-line connections

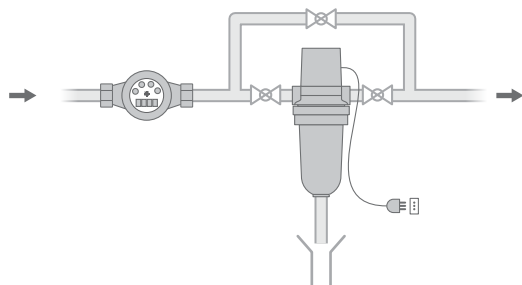

Depura Vortex AUTOMATIC are automatic, self cleaning security filters with cyclone washing and in-line connections. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional filter inexpedient. The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing), which can be programmed **with a frequency from 1 to 90 days and lasts 15''**.

Depura Vortex AUTOMATIC are made up of **head and housing in technopolymer**, with high physical and mechanical features, and **food grade stainless steel washable net** with 75 µm degree of filtration.


Above mentioned units are manufactured with top quality materials, certified for food use.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		FILTRATION	PN	MAX FLOW RATE (ΔP=0,2 bar)	OPERATING FLOW RATE (ΔP=0,2 bar)	MAX PRESS.	DIMENS. (HxLxP)
		€	pcs.	In-Out	HEAD/HOUSING	CARTRIDGE	µm	bar	m³/h	m³/h	bar	mm
DEPURA VORTEX AUTOMATIC	101.009.10	877,00	1	1"-1"¼M	TECHNOPOLYMER	ST. STEEL 304	75	20	9	8	20	500x250x230

Use: tec/pot; Water temperature 5-40 °C; Ambient temperature: 5-50 °C.

Depura Cyclon Baby

Manual self cleaning filters with cyclone washing for 4" cartridges

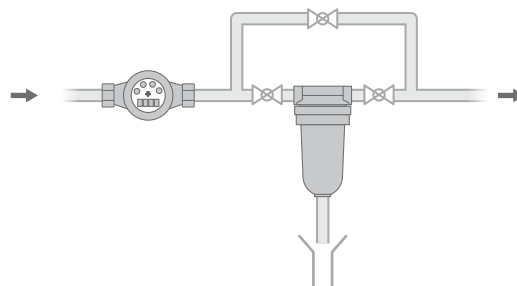

Depura Cyclon Baby are manual, self cleaning security filters with cyclone washing and in-line connections. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional or self cleaning filter inexpedient.

The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing), to be carried out by turning the lower knob 90° for 10/15 seconds. Depura Cyclon Baby are made up of head in brass and housing in SAN plastic material resistant to high pressure. Fitted with washable net filter cartridge in flat stainless steel with 90µm degree of filtration.

Ideal for tight spaces.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
		€		In-Out	Drain Ø	head	housing			
			pcs.					bar	m³/h	cm


WITH IN-LINE CONNECTIONS AND STAINLESS STEEL CARTRIDGE 90µm

DEPURA CYCLON BABY 1/2"	101.153.00	59,30	6	1/2" F	3/8" M	BRASS	SAN	10	1,1	8x18,5
DEPURA CYCLON BABY 3/4"	101.153.10	59,30	6	3/4" F	3/8" M	BRASS	SAN	10	1,1	8x18,5

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Depura Cyclon 550

Manual self cleaning filters with cyclone washing for 5" cartridges

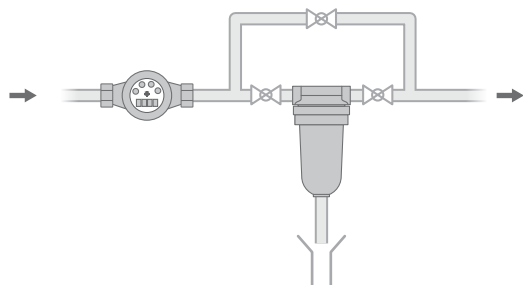

Depura Cyclon 550 are manual, self cleaning security filters with cyclone washing. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional or self cleaning filter inexpedient.

The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing), to be carried out by turning the lower knob 90° for 10/15 seconds. Depura Cyclon 550 are available in the PP, SP and SI versions:

- Depura Cyclon 550 PP. Head in polypropylene and housing in SAN plastic material resistant to high pressure. Fitted with washable net filter cartridge in flat stainless steel with 90µm degree of filtration. In-line connections.
- Depura Cyclon 550 SP. Head in polypropylene, connections in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in polypropylene with 90µm degree of filtration. Adjustable connections with fittings.
- Depura Cyclon 550 SI. Head in polypropylene, connections in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 90µm degree of filtration. Adjustable connections with fittings.

Depura Cyclon 550 can house the filter cartridges below:

- Washable net 5" PP 90µm
- FLAT STAINLESS STEEL washable net 5" 90µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		FITTINGS	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
		€	pcs.	In-Out	Drain Ø (mm)		head	housing	bar	m³/h	cm

WITH IN-LINE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm

DEPURA CYCLON PP 550 ½"	101.153.60	140,00	1	1/2" F	40	NO	PP	SAN	10	2,0	13x31
DEPURA CYCLON PP 550 ¾"	101.153.70	140,00	1	3/4" F	40	NO	PP	SAN	10	2,5	13x31
DEPURA CYCLON PP 550 1"	101.153.80	142,00	1	1" F	40	NO	PP	SAN	10	3,5	13x31

WITH ADJUSTABLE CONNECTIONS AND POLYPROPYLENE CARTRIDGE 90 µm

DEPURA CYCLON SP 550 ¾"	101.158.10	215,00	1	3/4" M	40	YES	PP-BRASS	SAN	10	2,5	15x37
DEPURA CYCLON SP 550 1"	101.158.30	235,00	1	1" M	40	YES	PP-BRASS	SAN	10	3,5	18x37
DEPURA CYCLON SP 550 1" ¼	101.158.50	205,00	1	1¼" M	40	NO	PP-BRASS	SAN	10	3,5	21x37

WITH ADJUSTABLE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm


DEPURA CYCLON SI 550 ¾"	101.158.20	260,00	1	¾" M	40	YES	PP-BRASS	SAN	10	2,5	15x37
DEPURA CYCLON SI 550 1"	101.158.40	280,00	1	1" M	40	YES	PP-BRASS	SAN	10	3,5	18x37
DEPURA CYCLON SI 550 1" ¼	101.158.60	250,00	1	1¼" M	40	NO	PP-BRASS	SAN	10	3,5	21x37

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Go to page 26 for ¾" and 1" fittings for Depura Cyclon SP and SI.

Depura Cyclon 700

Manual self cleaning filters with cyclone washing for 7" cartridges

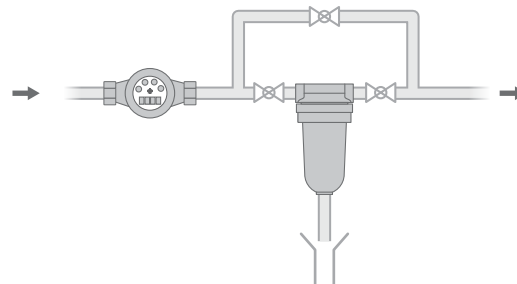

Depura Cyclon 700 are manual, self cleaning security filters with cyclone washing. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional or self cleaning filter inexpedient.

The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing), to be carried out by turning the lower knob 90° for 10/15 seconds. Depura Cyclon 700 are available in the PP and SI versions:

- Depura Cyclon 700 PP. Head in polypropylene and housing in SAN plastic material resistant to high pressure. Fitted with washable net filter cartridge in flat stainless steel with 90µm degree of filtration. In-line connections.
- Depura Cyclon 700 SI. Head in polypropylene, connections in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 90µm degree of filtration. Adjustable connections with fittings.

Depura Cyclon 700 can house the filter cartridges below:

- STAINLESS STEEL washable net 7" 90µm
- FLAT STAINLESS STEEL washable net 7" 90µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		FITTINGS	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
		€	pcs.	In-Out	Drain Ø (mm)		head	housing	bar	m³/h	cm

WITH IN-LINE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm

DEPURA CYCLON PP 700 ½"	101.154.60	148,00	1	1/2" F	40	NO	PP	SAN	10	2,0	13x38
DEPURA CYCLON PP 700 ¾"	101.154.70	148,00	1	3/4" F	40	NO	PP	SAN	10	2,5	13x38
DEPURA CYCLON PP 700 1"	101.155.70	150,00	1	1" F	40	NO	PP	SAN	10	3,5	13x38

WITH ADJUSTABLE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm

DEPURA CYCLON SI 700 ¾"	101.159.20	270,00	1	¾" M	40	YES	PP-BRASS	SAN	10	2,5	15x41
DEPURA CYCLON SI 700 1"	101.159.40	290,00	1	1" M	40	YES	PP-BRASS	SAN	10	3,5	18x41
DEPURA CYCLON SI 700 1¼"	101.159.60	260,00	1	1¼" M	40	NO	PP-BRASS	SAN	10	3,5	21x41

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Go to page 26 for ¾" and 1" fittings for Depura Cyclon SI.

Depura Cyclon 1000

Manual self cleaning filters with cyclone washing for 10" cartridges



Depura Cyclon 1000 are manual, self cleaning security filters with cyclone washing. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional or self cleaning filter inexpedient.

The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing), to be carried out by turning the lower knob 90° for 10/15 seconds. Depura Cyclon 1000 are available in the PP, SI and OX versions:

- Depura Cyclon 1000 PP. Head in polypropylene and housing in SAN plastic material resistant to high pressure. Fitted with washable net filter cartridge in flat stainless steel with 90µm degree of filtration. In-line connections.
- Depura Cyclon 1000 SI. Head in polypropylene, connections in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 90µm degree of filtration. Adjustable connections with fittings.
- Depura Cyclon 1000 OX. Head in brass and housing in stainless steel. Fitted with washable net filter cartridge in flat stainless steel with 90µm degree of filtration. In-line connections with in-out pressure gauges.

Depura Cyclon 1000 can house the filter cartridges below:

- STAINLESS STEEL washable net 10" 90µm
- FLAT STAINLESS STEEL washable net 10" 90µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		FITTINGS	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
		€	pcs.	In-Out	Drain Ø		head	housing	bar	m³/h	cm

WITH IN-LINE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm

DEPURA CYCLON PP 1000 ½"	101.155.60	170,00	1	1/2" F	40 mm	NO	PP	SAN	10	2,0	13x43
DEPURA CYCLON PP 1000 ¾"	101.155.80	170,00	1	3/4" F	40 mm	NO	PP	SAN	10	2,5	13x43
DEPURA CYCLON PP 1000 1"	101.155.90	172,00	1	1" F	40 mm	NO	PP	SAN	10	3,5	13x43

WITH ADJUSTABLE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm

DEPURA CYCLON SI 1000 ¾"	101.160.20	285,00	1	¾" M	40 mm	YES	PP-BRASS	SAN	10	2,5	15x49
DEPURA CYCLON SI 1000 1"	101.160.40	305,00	1	1" M	40 mm	YES	PP-BRASS	SAN	10	3,5	18x49
DEPURA CYCLON SI 1000 1¼"	101.160.60	275,00	1	1¼" M	40 mm	NO	PP-BRASS	SAN	10	3,5	21x49

WITH IN-LINE CONNECTIONS, IN/OUT PRESSURE GAUGES AND FLAT STAINLESS STEEL CARTRIDGE 90 µm


DEPURA CYCLON OX 1000 1"	101.155.65	552,00	1	1" F	¾" F	NO	BRASS	ST. STEEL	16	3,5	13x43
--------------------------	------------	--------	---	------	------	----	-------	-----------	----	-----	-------

Use: tec/pot; Water Temperature: PP and SI 5-40 °C / OX 5-80 °C; Ambient Temperature: 5-50 °C.

Go to **page 26** for ¾" and 1" fittings for Depura Cyclon SI.

Depura Cyclon 3000

Manual self cleaning filters with cyclone washing for 10" cartridges

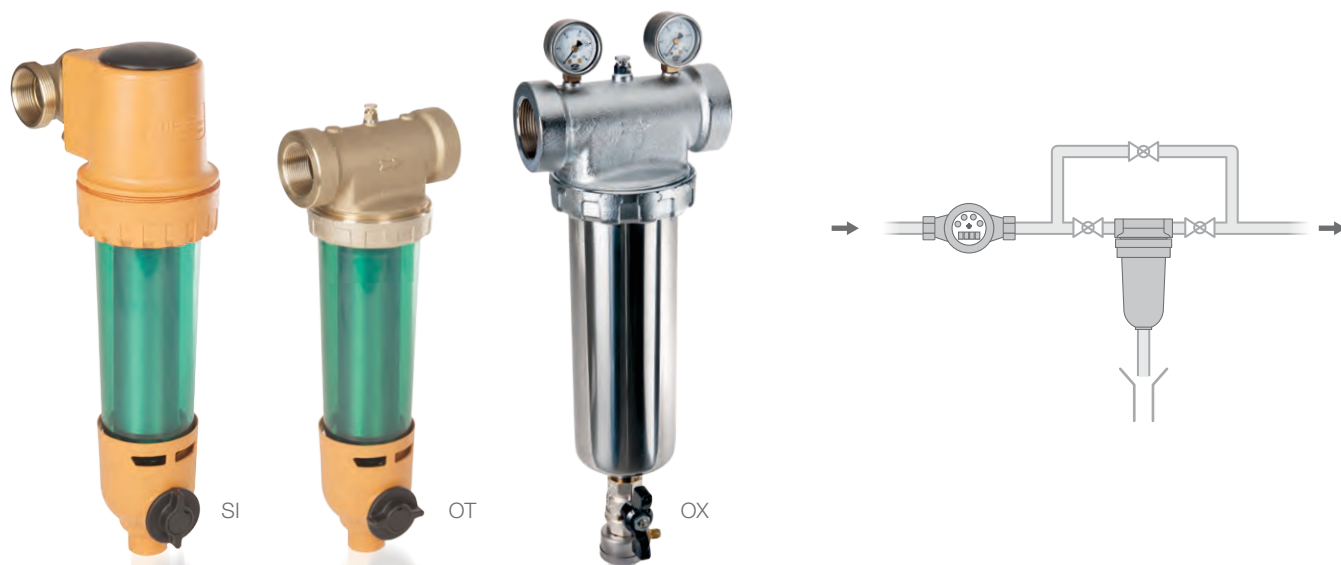

Depura Cyclon 1000 are manual, self cleaning security filters with cyclone washing. For civil, technical and industrial use, these filters are used in all those cases when sand or other suspended particles in water make the installation of a traditional or self cleaning filter inexpedient.

The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing), to be carried out by turning the lower knob 90° for 10/15 seconds. Depura Cyclon 3000 are available in the SI, OT, OX versions:

- Depura Cyclon 3000 SI. Head in polypropylene, connections in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 90µm degree of filtration. Adjustable connections with fittings.
- Depura Cyclon 3000 OT. Head in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 90µm degree of filtration. In-line connections.
- Depura Cyclon 3000 OX. Head in brass and housing in stainless steel. Fitted with washable net filter cartridge in flat stainless steel with 90µm degree of filtration. In-line connections with in-out pressure gauges.

Depura Cyclon 3000 can house the filter cartridges below:

- STAINLESS STEEL washable net 10"/3 90µm
- FLAT STAINLESS STEEL washable net 10"/3 90µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		FITTINGS	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
		€	pcs.	In-Out	Drain Ø		HEAD	HOUSING	bar	m³/h	cm

WITH ADJUSTABLE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm

DEPURA CYCLON SI 3000 1½"	101.161.20	330,00	1	1½" M	40 mm	YES	PP-BRASS	SAN	10	8,0	19x49
DEPURA CYCLON SI 3000 2"	101.161.40	285,00	1	2" M	40 mm	NO	PP-BRASS	SAN	10	8,0	23x49

WITH IN-LINE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 90 µm

DEPURA CYCLON OT 3000 1½"	101.156.70	308,00	1	1½" F	40 mm	NO	BRASS	SAN	10	11,0	16x42
DEPURA CYCLON OT 3000 2"	101.156.90	308,00	1	2" F	40 mm	NO	BRASS	SAN	10	12,0	16x42

WITH IN-LINE CONNECTIONS, IN/OUT PRESSURE GAUGES AND FLAT STAINLESS STEEL CARTRIDGE 90 µm


DEPURA CYCLON OX 3000 1½"	101.156.75	751,00	1	1½" F	¾" F	NO	BRASS	ST. STEEL	16	11,0	16x42
DEPURA CYCLON OX 3000 2"	101.156.95	751,00	1	2" F	¾" F	NO	BRASS	ST. STEEL	16	12,0	16x42

Use: tec/pot; Water Temperature: OT and SI 5-40 °C / OX 5-80 °C; Ambient Temperature: 5-50 °C.

Go to page 26 for 1" ½ fittings for Depura Cyclon SI.

Depura Cyclon XL

Flanged self cleaning filters with cyclone washing

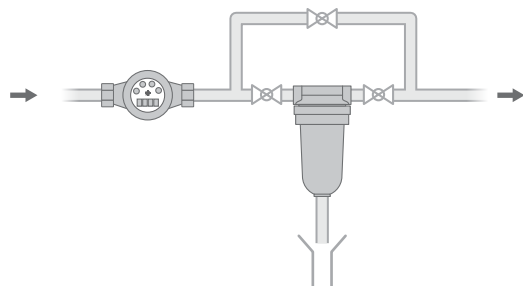

Depura Cyclon XL are flanged, manual, self cleaning security filters with cyclone washing. For civil, technical and industrial use, these filters are used to filter clear water with a low content of suspended solids, such as municipal, rain, well and spring water.

The filter cartridge is kept clean by a periodic washing through water turbines (cyclone washing), to be carried out by turning the lower knob 90° for 10/15 seconds. Depura Cyclon XL are available in two mobile flanges, DN65 and DN80. They are made up of head and connections in polypropylene, housing in SAN plastic material resistant to high pressure. Fitted with filter net in nylon with 150µm degree of filtration. In-line connections with in-out pressure gauges.

Depura Cyclon XL can house the filter nets below:

- Filter net 25 µm
- Filter net 150 µm

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
				In-Out	Drain Ø (mm)	head	housing			
		€	pcs.					bar	m³/h	cm


WITH IN-LINE CONNECTIONS, IN/OUT PRESSURE GAUGES AND FILTER NET 150µm

DEPURA CYCLON XL DN65	101.250.50	1.017,00	1	DN 65	20	PP	SAN	10	25	30,4x71
DEPURA CYCLON XL DN80	101.250.60	1.161,00	1	DN 80	20	PP	SAN	10	32	31,3x71

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Depura Mini / Matic SI

Manual self cleaning filters for 7" cartridges

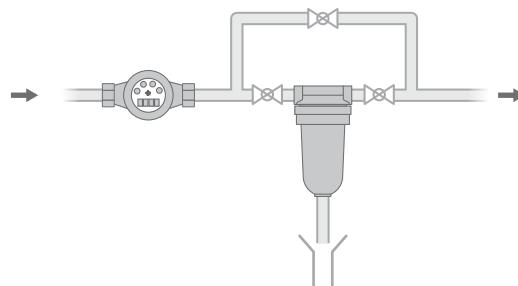

Depura Mini and Depura Matic are manual, self cleaning security filters. For civil, technical and industrial use, these filters are an alternative solution to traditional ones. No recurrent maintenance of the filter cartridge is necessary, as it is kept clean by a periodic washing combined with an effective mechanical brushing system. Self cleaning operation is carried out by turning the upper knob manually.

- Depura Mini. Head in polypropylene and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 95µm degree of filtration. In-line connections.
- Depura Matic. Head in polypropylene, connections in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 95µm degree of filtration. Adjustable connections with fittings.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		FITTINGS	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
				In-Out	Drain Ø (mm)		head	housing			
		€	pcs.						bar	m³/h	cm

WITH IN-LINE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 95 µm

DEPURA MINI ¾"	101.003.10	242,00	1	¾" F	40	NO	PP	SAN	10	3,5	13x33,5
DEPURA MINI 1"	101.003.60	242,00	1	1" F	40	NO	PP	SAN	10	4,0	13x33,5

WITH ADJUSTABLE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 95 µm

DEPURA MATIC SI ¾"	101.004.50	305,00	1	¾" M	40	YES	PP-BRASS	SAN	10	3,5	15x41
DEPURA MATIC SI 1"	101.005.50	335,00	1	1" M	40	YES	PP-BRASS	SAN	10	4,0	18x41
DEPURA MATIC SI 1¼"	101.006.50	295,00	1	1¼" M	40	NO	PP-BRASS	SAN	10	4,0	21x41
DEPURA MATIC SI 1½"	101.007.50	355,00	1	1½" M	40	YES	PP-BRASS	SAN	10	7,0	19x41
DEPURA MATIC SI 2"	101.008.50	310,00	1	2" M	40	NO	PP-BRASS	SAN	10	7,0	23x41


Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Go to page 26 for all fittings for Depura Matic SI.




Depura AutoMatic

7" automatic self cleaning filters

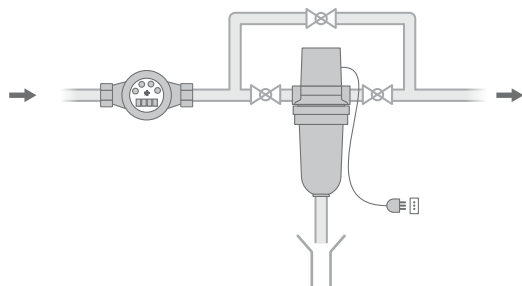

Depura Automatic are automatic, self cleaning security filters. For civil, technical and industrial use, these filters are an alternative solution to traditional ones. The periodic washing of the cartridge is carried out automatically through brushing and can be programmed from 1 to 30 days. The washing duration can be set too, from 10 to 90 seconds.

Depura Automatic are made up of head in brass and housing in SAN plastic material resistant to high pressure. Fitted with filter cartridge in flat stainless steel with 95µm degree of filtration. In-line connections.

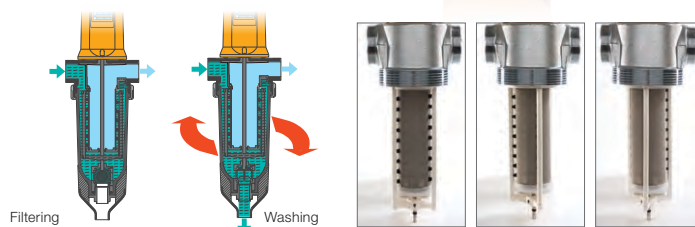

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.		FITTINGS	MATERIAL		PN	FLOW RATE (ΔP=0,2 bar)	DIMENS. (ØxH)
				In-Out	Drain Ø (mm)		head	housing			
		€	pcs.						bar	m³/h	cm

WITH IN-LINE CONNECTIONS AND FLAT STAINLESS STEEL CARTRIDGE 95µm

DEPURA AUTOMATIC ¾" (L)	101.004.10	1.320,00	1	¾" F	40	NO	BRASS	SAN	10	3,5	18x46
DEPURA AUTOMATIC ¾" (R)	101.004.20	1.320,00	1	¾" F	40	NO	BRASS	SAN	10	3,5	18x46
DEPURA AUTOMATIC 1" (L)	101.005.10	1.340,00	1	1" F	40	NO	BRASS	SAN	10	4,0	14x46
DEPURA AUTOMATIC 1" (R)	101.005.20	1.340,00	1	1" F	40	NO	BRASS	SAN	10	4,0	14x46
DEPURA AUTOMATIC 1" ¼" (L)	101.006.10	1.310,00	1	1¼" F	40	NO	BRASS	SAN	10	4,0	14x46
DEPURA AUTOMATIC 1" ¼" (R)	101.006.20	1.310,00	1	1¼" F	40	NO	BRASS	SAN	10	4,0	14x46
DEPURA AUTOMATIC 1" ½" (L)	101.007.10	1.380,00	1	1½" F	40	NO	BRASS	SAN	10	7,0	14x48
DEPURA AUTOMATIC 1" ½" (R)	101.007.20	1.380,00	1	1½" F	40	NO	BRASS	SAN	10	7,0	14x48
DEPURA AUTOMATIC 2" (L)	101.008.10	1.335,00	1	2" F	40	NO	BRASS	SAN	10	7,0	23x48
DEPURA AUTOMATIC 2" (R)	101.008.20	1.335,00	1	2" F	40	NO	BRASS	SAN	10	7,0	23x48

Use: tec/pot; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

4" filter cartridges

4" filter cartridges for Depura Baby/Depura Cyclon Baby for technical/potable use

ITEM	ITEM CODE	UNIT PRICE	PACK.	MATERIAL	DEGREE OF FILTRATION	FLOW RATE ($\Delta P=0,2$ bar)	DIMENS. ($\varnothing \times H$)
		€	pcs.		μm	m ³ /h	cm
FLAT STAINLESS STEEL WASHABLE NET 90 μm	600.080.60	12,00	1	FLAT ST. STEEL	90	1,10	3,1x9,5

5" filter cartridges

5" filter cartridges for technical/potable use ad uso tecnico/potabile



ITEM	ITEM CODE	UNIT PRICE	PACK.	MATERIAL	DEGREE OF FILTRATION	FLOW RATE ($\Delta P=0,2$ bar)					DIMENS. ($\varnothing \times H$)
						1/2"	3/4"	1"	1 1/2"	2"	
		€	pcs.		μm	m ³ /h	m ³ /h	m ³ /h	m ³ /h	m ³ /h	cm
FOR DEPURA 500 AND 550											
WASHABLE NET 5" PP 60 μm	103.010.10	10,40	14	PP/PA	60	2,00	2,50	3,50	-	-	6x13
WASHABLE NET 5" PP 90 μm	103.010.20	10,40	14	PP/PA	90	2,25	2,75	3,75	-	-	6x13
STAINLESS STEEL WASHABLE NET 5" 90 μm	103.020.10	49,50	6	ST. STEEL	90	2,30	2,80	3,80	-	-	6x13
FLAT STAINLESS STEEL WASHABLE NET 90 μm	103.020.65	61,20	6	FLAT ST. STEEL	90	2,30	2,80	3,80	-	-	6x13
WOUND COTTON 5" PP 5 μm	103.030.20	4,10	14	PP	5	1,80	2,30	3,30	-	-	5,5x13
WOUND COTTON 5" PP 20 μm	103.030.10	4,10	14	PP	20	1,90	2,40	3,40	-	-	5,5x13

7" filter cartridges

7" filter cartridges for technical/potable use ad uso tecnico/potabile



ITEM	ITEM CODE	UNIT PRICE	PACK.	MATERIAL	DEGREE OF FILTRATION	FLOW RATE ($\Delta P=0,2$ bar)					DIMENS. ($\varnothing \times H$)
						1/2"	3/4"	1"	1 1/2"	2"	
		€	pcs.		μm	m ³ /h	m ³ /h	m ³ /h	m ³ /h	m ³ /h	cm
FOR DEPURA 700											
WASHABLE NET 7" PP 60 μm	103.010.30	11,30	14	PP/PA	60	2,00	2,50	3,50	-	-	6x18
WASHABLE NET 7" PP 90 μm	103.010.40	11,30	14	PP/PA	90	2,25	2,75	3,75	-	-	6x18
WASHABLE NET 7" ST. STEEL 90 μm	103.020.30	63,10	6	ST. STEEL	90	2,30	2,80	3,80	-	-	6x18
WASHABLE NET 7" FLAT ST. STEEL 90 μm	103.020.70	66,30	6	FLAT ST. STEEL	90	2,30	2,80	3,80	-	-	6x18
WOUND COTTON 7" PP 5 μm	103.030.40	4,70	14	PP	5	1,80	2,30	3,30	-	-	5,5x18
WOUND COTTON 7" PP 20 μm	103.030.30	4,70	14	PP	20	1,90	2,40	3,40	-	-	5,5x18

10" filter cartridges

10" filter cartridges
for technical/potable use



ITEM	ITEM CODE	UNIT PRICE	PACK.	MATERIAL	DEGREE OF FILTRATION	FLOW RATE ($\Delta P=0,2$ bar)					DIMENS. (ØxH)
		€				1/2"	3/4"	1"	1½"	2"	
			pcs.		µm	m³/h	m³/h	m³/h	m³/h	m³/h	cm

FOR DEPURA 1000

WASHABLE NET 10" PP 60µm	103.010.50	13,00	15	PP/PA	60	2,00	2,50	3,50	-	-	6x25
WASHABLE NET 10" PP 90µm	103.010.60	13,00	15	PP/PA	90	2,25	2,75	3,75	-	-	6x25
WASHABLE NET 10" ST. STEEL 90µm	103.020.50	69,60	6	ST. STEEL	90	2,30	2,80	3,80	-	-	6x25
WASHABLE NET 10" FLAT ST. STEEL 90µm	103.020.90	75,50	6	FLAT ST. STEEL	90	2,30	2,80	3,80	-	-	6x25
WOUND COTTON 10" PP 5µm	103.030.60	5,10	15	PP	5	1,80	2,30	3,30	-	-	5,5x25
WOUND COTTON 10" PP 20µm	103.030.50	5,10	15	PP	20	1,90	2,40	3,40	-	-	5,5x25

FOR DEPURA 3000

WASHABLE NET 10"/3 PP 90µm	103.011.10	15,60	15	PP/PA	90	-	-	-	10,5	11,5	6x25
WASHABLE NET 10"/3 ST. STEEL 90µm	103.020.60	69,60	6	ST. STEEL	90	-	-	-	11,0	12,0	6x25
WASHABLE NET 10"/3 FLAT ST. STEEL 90µm	103.020.80	75,50	6	FLAT ST. STEEL	90	-	-	-	11,0	12,0	6,4x25
WOUND COTTON 10"/3 PP 20µm	103.030.65	23,10	6	PP	20	-	-	-	10,0	11,0	6x25

FOR DEPURA CYCLON XL

WASHABLE NET 25µm	456.201.20	7,90	1		25						
WASHABLE NET 150µm	456.201.30	34,30	1		150						

5"/7"/10" empty cartridges

Empty filter cartridges
for technical/potable use



ITEM	ITEM CODE	UNIT PRICE	PACK.	MATERIAL	DEGREE OF FILTRATION	FLOW RATE ($\Delta P=0,2$ bar)					DIMENS. (ØxH)
		€				1/2"	3/4"	1"	1½"	2"	
			pcs.		µm	m³/h	m³/h	m³/h	m³/h	m³/h	cm

EMPTY CARTRIDGE 5"	103.071.00	9,00	12			-	-	-	-	-	6x13
EMPTY CARTRIDGE 7"	103.072.00	9,60	12			-	-	-	-	-	6x18
EMPTY CARTRIDGE 10"	103.073.00	10,80	12			-	-	-	-	-	6x25

Products for empty cartridges



ITEM	ITEM CODE	PRICE	PACK.		MATERIAL
		€/pcs.	kg	PZ.	

GELCARB 25	410.700.10	7,50/kg	25	1	Granular carbon with adsorbent action. Suitable for activated carbon adsorbent cartridges
GELCARB 10	151.000.10	108,00	10	1	Granular carbon with adsorbent action. Suitable for activated carbon adsorbent cartridges
GELPHOS K	107.030.50	30,50	1,5	20	Crystals with anti scale action. Suitable for anti scale K cartridges
GELPHOS K	107.030.10	401,00	25	1	Crystals with anti scale action. Suitable for anti scale K cartridges

Cartridges for Depura Vortex

Filter cartridges for technical/potable use

ITEM	ITEM CODE	UNIT PRICE	PACK.	MATERIAL	DEGREE OF FILTRATION	FLOW RATE ($\Delta P=0,2$ bar)					DIMENS. ($\emptyset \times H$)
		€			μm	OT	PL	OT MF	OX	AUTOMATIC	cm
FOR DEPURA VORTEX						OT	PL	OT MF	OX	AUTOMATIC	
STAINLESS STEEL WASHABLE NET OT	455.900.77	21,20	1	PP/AISI 316L	75	2,80	3,2	2,8	-	-	4,2x14,5
STAINLESS STEEL WASHABLE NET OX	455.900.78	12,80	1	PP/AISI 316L	60	-	-	-	2,8	-	4,2x14,5
STAINLESS STEEL WASHABLE NET AUTOMATIC	455.900.79	42,40	1	PP/AISI 316L	75	-	-	-	-	8	6,7x19,0

Spare parts and accessories for filters

ITEM	ITEM CODE	UNIT PRICE	PACK.	USE
		€/pcs.	pcs.	
SMALL WRENCH	450.950.40	4,90	1	For DEPURA BABY
BIG WRENCH	125.210.50	14,80	1	Wrench for DEPURA filters (5", 7" and 10" brass and plastic)
PRESSURE GAUGE Ø 40	453.050.55	21,70	1	For DEPURA CYCLON SI, DEPURA MATIC SI, DEPURA 3000 and DEPURA 3000 CYCLON
BRACKET	455.301.20	98,80	1	For DEPURA CYCLON XL DN65 / DN 80
PVC FLANGE KIT	102.301.78	93,60	1	For DEPURA CYCLON XL DN65 x 2" 1/2 F
PVC FLANGE KIT	102.301.79	108,00	1	For DEPURA CYCLON XL DN 80 x 3" F
FITTING OUT ¾" F	450.830.20	7,50	1*	For Depura CYCLON SI and SP with 1 "¼ head
FITTING OUT 1" ½ M	450.830.10	9,40	1*	For Depura MATIC SI with 1 "¼ and 2" heads
FITTING OUT 1" ½ M	450.830.40	24,60	1*	For Depura CYCLON SI and SP with 2 "head For Depura MATIC SI with 1 "¼ and 2" heads
AUTOMATIC WASHING KIT FOR CYCLON	102.301.70	764,00	1	For all Depura CYCLON except DEPURA BABY CYCLON
OR FOR HOUSING DEPURA 700-1000-3000	453.400.90	0,78	1	For DEPURA 700, 1000, 3000
HOUSING FOR DEPURA 1000-3000	600.071.19	8,40	1	For DEPURA 1000, 3000
HOUSING FOR DEPURA 700 PP	600.071.22	7,00	1	For DEPURA 700 PL
OR FOR HOUSING DEPURA 500	453.401.65	0,30	1	OR FOR HOUSING DEPURA 500
SPRING FOR FILTER CARTRIDGES	453.150.10	0,50	1	For Depura (XL and VORTEX not included)
5" HOUSING FOR DEPURA 550	600.071.21	5,70	1	For DEPURA 550
CARTRIDGE DEPURA BABY	600.080.60	12,00	1	For DEPURA BABY
HOUSING FOR DEPURA BABY CYCLON	600.071.25	2,52	1	For DEPURA BABY CYCLON
HOUSING FOR DEPURA 500	600.071.15	4,82	1	For DEPURA 500
HOUSING FOR DEPURA 1000 TROG	600.071.42	29,60	1	For DEPURA 1000 TROGAMID

*Each pack contains 1 fitting. For a filter, 2 pcs. of the same item code are required.

Clear Acid Neutralizer

Neutralizing filter for acidic condensates of condensing boilers



Clear Acid Neutralizer is a neutralizing filter for condensing wall boilers with power up to 50 kW. The neutralizing media increase and keep water hardness and pH levels balanced; they do not contain any components which might alter the features of the neutralized water to be drained. The lifetime of the unit depends on the acidity and quantity of the condensates to be neutralized as well as on the working hours.

The transparent slot allows to check the level of the neutralizing media and replace the whole unit.


Clear Acid Neutralizer shall be installed in horizontal position on the condensate drain line.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL	MAX PRESS.	MAX FLOW RATE (ΔP<0,3 BAR)	DIMENS. (interaxis)
		€	pcs.	F		bar	l/h	cm
CLEAR ACID NEUTRALIZER	101.091.95	56,10	4	1"	PVC	2	8,0	29,5

Use: tec; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

5 L. Neutralizing filter

Neutralizing filter for acidic condensates of condensing boilers up to 378 kW



The 5 litre neutralizer is a neutralizing filter with activated media of calcium carbonate for boilers with power up to 378 kW. The neutralizing media increase and keep water hardness and pH levels balanced. They do not contain any components which might alter the features of the neutralized water to be drained.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MATERIAL		MAX PRESS.	MAX FLOW RATE ($\Delta P < 0,3$ BAR)	DIMENS. (ØXH)
		€			head	housing			
5 L. NEUTRALIZING FILTER	101.092.82	322,00	1	3/4"	PP	-	6	60,0	18x40

Use: tec; Water Temperature: 5-40 °C; Ambient Temperature: 5-50 °C.

Consumables for neutralizing filters



Limestone




Neutralizing Cartridge

ITEM	ITEM CODE	UNIT PRICE	PACK.		DESCRIPTION
		€	Kg	pcs.	
REFILL FOR CLEAR	600.024.35	38,20	-	1	For Clear Acid Neutralizer
REFILL FOR 5L	410.701.42	3,10 €/kg	25	1	For 5 liters neutralizer filter

Use: tec.

Deferr

Iron removers

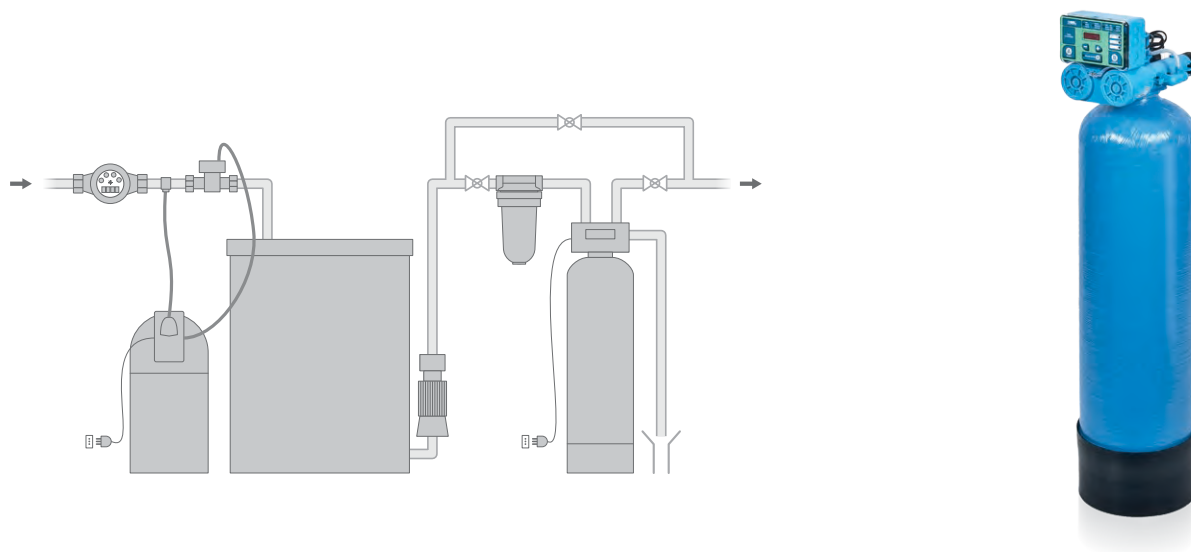

Deferr iron removers are able to remove high amounts of iron and manganese. Before passing through the iron remover water to be treated shall be oxidized, so has to remain in a tank for the time necessary to complete the oxidizing process:

- 30' for 1,5 ppm of Fe
- 45' for 3 ppm of Fe
- 60' for 6 ppm of Fe

From the tank water is pumped via a surge tank into the iron remover, where the filter media retain iron and manganese oxidized and turned into flocks. The flocks accumulated by the filter media shall be periodically removed with a backwash. The backwash frequency can be programmed by time. The system is to be sized according to the maximum flow rate per hour and to the levels of iron and manganese.

Deferr units are made up of:

- head with hydropneumatic valve in plastic material and electronic timer ET 500 F
- cylinder in plastic material covered in fibreglass containing the active media.

ITEM	ITEM CODE	UNIT PRICE	CONN.	MEDIA	IRON ≤ 1,5 PPM		IRON ≤ 3 PPM		IRON ≤ 6 PPM		DRAIN FITTING	BACKWASH FLOW RATE	BACKWASH DURATION	DIMENS. (ØxH) CM
					FLOW RATE	ΔP	FLOW RATE	ΔP	FLOW RATE	ΔP				
		€		l	m³/h	bar	m³/h	bar	m³/h	bar	mm	m³/h	min	
DEFERR 30	110.010.10	1.526,00	1¼" F	30	0,5	<0,3	0,3	<0,2	0,13	<0,2	25	4	15	25x111
DEFERR 45	110.030.10	1.666,00	1¼" F	45	0,8	<0,4	0,4	<0,3	0,19	<0,2	25	4,3	20	25x159
DEFERR 75	110.050.10	2.186,00	1¼" F	75	1,1	<0,3	0,5	<0,2	0,27	<0,2	25	4,75	25	33x159
DEFERR 110	110.070.10	2.952,00	1¼" F	110	1,8	<0,6	0,9	<0,3	0,46	<0,2	25	5,4	30	37x186
DEFERR 140 M	110.091.10	3.593,00	2" M	140	2,3	<0,6	1,2	<0,3	0,58	<0,2	25	6	35	41x192
DEFERR 200 M	110.111.10	5.596,00	2" M	200	3,4	<0,5	1,7	<0,2	0,85	<0,2	25	6,5	40	56x190
DEFERR 320 B	110.140.10	9.694,00	2" M	320	5,5	<0,6	2,7	<0,3	1,36	<0,2	40	12	20	61x224
DEFERR 500 B	110.170.10	11.809,00	2" M	500	8,5	<0,6	4,3	<0,3	2,13	<0,2	40	15	25	77x240


PS. 2 ppm of Fe = 1 ppm of Mn - Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C; Electrical absorption: 12 VA

Guide to choice of Deferr

OPERATING FLOW RATE	≤ 0,5 m³/h	0,5-0,75 m³/h	0,75-1 m³/h	1-1,25 m³/h	1,25-1,5 m³/h	1,5-1,8 m³/h	1,8-2,1 m³/h	2,1-2,5 m³/h	2,5-3 m³/h	3-3,6 m³/h	3,6-4,2 m³/h	4,2-5 m³/h	5-6 m³/h	6-9 m³/h
IRON (ppm)														
≤ 0,8	30	30	45	75	75	75	110	110	110	140	200	200	320	500
≤ 1,5	30	45	75	110	110	110	140	200	200	320	320	320	500	-
≤ 3	75	110	140	200	200	320	320	320	500	500	500	-	-	-
≤ 6	140	200	320	320	500	500	500	-	-	-	-	-	-	-

Desabb

Clarifiers

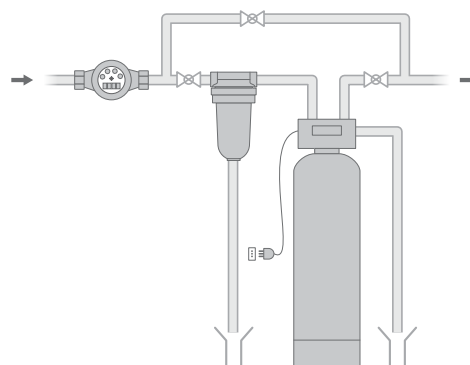

Desabb clarifiers are used to remove water turbidity. The impurities accumulated by the filter media shall be periodically removed with a backwash. The backwash frequency can be programmed by time. The system is to be sized according to the flow rate required by the user and to the turbidity level of the water to be treated.

Desabb units are made up of:

- head with hydropneumatic valve in plastic material and electronic timer ET 500 F
- cylinder in plastic material covered in fibreglass containing a multilayered filter bed with different grain sizes.

If turbidity exceeds 10 mg/l of SiO₂, it is necessary to install a flocculant dosing system before the Desabb.

ITEM	ITEM CODE	UNIT PRICE	CONN.	MEDIA	TURBIDITY <10 MG/L OF SiO ₂		TURBIDITY 10-30 MG/L OF SiO ₂		TURBIDITY >30 MG/L OF SiO ₂		DRAIN FITTING	FLOW RATE CONTROLAV.	BACKWASH DURATION.	DIMENS. (ØxH) cm
					FLOW RATE m ³ /h	ΔP bar	FLOW RATE m ³ /h	ΔP bar	FLOW RATE m ³ /h	ΔP bar				
		€		l							mm	m ³ /h	min	
DESABB 30	109.480.10	1.374,00	1¼" F	30	0,9	<0,4	0,6	<0,3	0,3	<0,2	25	4	15	25x111
DESABB 45	109.500.10	1.508,00	1¼" F	45	1,4	<0,7	0,9	<0,5	0,45	<0,3	25	4,3	20	25x159
DESABB 75	109.540.10	1.930,00	1¼" F	75	2,3	<0,7	1,5	<0,5	0,75	<0,3	25	4,75	25	33x159
DESABB 110	109.560.10	2.504,00	1¼" F	110	3,3	<1,0	2,2	<0,7	1,1	<0,4	25	5,4	30	37x186
DESABB 140 M	109.581.10	3.031,00	2" M	140	4,2	<0,7	2,8	<0,5	1,4	<0,3	25	6	35	41x192
DESABB 200 M	109.601.10	4.820,00	2" M	200	6	<0,9	4	<0,7	2	<0,4	25	6,5	40	56x190
DESABB 320 B	109.620.10	8.226,00	2" M	320	9,6	<1,0	6,4	<0,7	3,2	<0,4	40	12	20	61x224
DESABB 500 B	109.680.10	9.667,00	2" M	500	15	<1,0	10	<0,7	5	<0,4	40	15	25	77x240


Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C; Electrical absorption: 12 VA

Guide to choice of Desabb

OPERATING FLOW RATE	≤ 0,9 m ³ /h	0,9-1,4 m ³ /h	1,4-1,8 m ³ /h	1,8-2,8 m ³ /h	2,8-4 m ³ /h	4-5 m ³ /h	5-6 m ³ /h	6 -7 m ³ /h	7-9 m ³ /h	9 -12 m ³ /h	12 -15 m ³ /h
TURBIDITY (mg/l)											
≤ 10	30	45	75	110	140	200	200	320	320	500	500
10-30	45	75	110	200	200	320	320	500	500	-	-
> 30	110	140	200	320	500	500	-	-	-	-	-

Declor

Chlorine removers

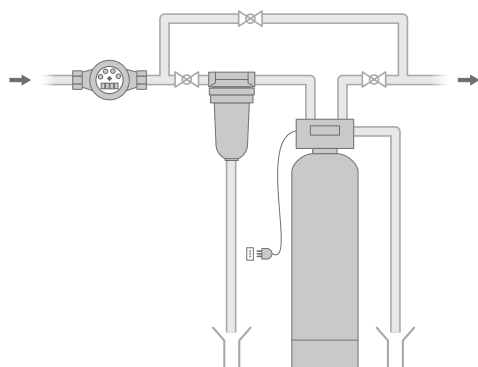

Declor activated carbon filters are used to reduce the excess of residual chlorine and to remove bad smells and chemical pollutants such as atrazine, hydrocarbons, etc. The channelling created by water on the filter media shall be periodically removed with a backwash. The backwash frequency can be programmed by time. The system is to be sized according to the flow rate required by the user and to the level of chlorine and organic substances.

Declor units are made up of:

- head with hydropneumatic valve in plastic material and electronic timer ET 500 F
- cylinder in plastic material covered in fibreglass containing special media of activated carbon of vegetal origin with adsorbent action.

ITEM	ITEM CODE	UNIT PRICE	CONN.	MEDIA	CHLORINE REMOVING USE*		ADSORBENT USE**		CHLORINE REMOVING USE/ ADSORBENT USE***		DRAIN FITTING	BACKWASH DURATION	DIMENS. (ØxH) cm
					FLOW RATE	ΔP	FLOW RATE	ΔP	FLOW RATE	ΔP			
		€		l	m³/h	bar	m³/h	bar	m³/h	bar	mm	min	
DECLOR 30	109.300.10	1.454,00	1¼" F	33	0,8	<0,3	0,4	<0,2	0,19	<0,2	25	15	25x111
DECLOR 45	109.320.10	1.586,00	1¼" F	48	1,1	<0,6	0,6	<0,3	0,28	<0,2	25	20	25x159
DECLOR 75	109.340.10	2.060,00	1¼" F	80	1,8	<0,6	0,9	<0,3	0,46	<0,2	25	25	33x159
DECLOR 110	109.380.10	2.804,00	1¼" F	116	2,7	<0,9	1,3	<0,5	0,67	<0,3	25	30	37x186
DECLOR 140 M	109.401.10	3.398,00	2" M	147	3,4	<0,8	1,7	<0,5	0,85	<0,3	25	35	41x192
DECLOR 200 M	109.421.10	5.439,00	2" M	213	4,9	<0,7	2,5	<0,4	1,23	<0,2	25	40	56x190
DECLOR 320 B	109.440.10	9.074,00	2" M	332	7,7	<0,9	3,8	<0,5	1,92	<0,3	40	20	61x224
DECLOR 500 B	109.460.10	11.015,00	2" M	530	12,2	<0,9	6,1	<0,5	3,06	<0,3	40	25	77x240

Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C; Electrical absorption: 12 VA

Guide to choice of Declor

OPERATING FLOW RATE	≤ 0,8 m³/h	0,8 - 1,4 m³/h	1,4 - 1,8 m³/h	1,8 - 2,8 m³/h	2,8 - 4 m³/h	4 - 5 m³/h	5 - 6 m³/h	6 - 7 m³/h	7 - 9 m³/h	9 - 12 m³/h
CHLORINE REMOVING USE*	30	75	75	140	200	320	320	320	500	500
ADSORBENT USE**	75	140	200	320	500	500	500	-	-	-
CHLORINE REMOV. / ADSORBENT USE***	140	320	320	500	-	-	-	-	-	-


* water with max 1 ppm of chlorine at the inlet

** water with max 1 ppm of chlorine at the inlet and max 1 ppm of adsorbent substances

*** water with max 3 ppm of chlorine at the inlet and max 3 ppm of adsorbent substances

Neutral

Neutralizers

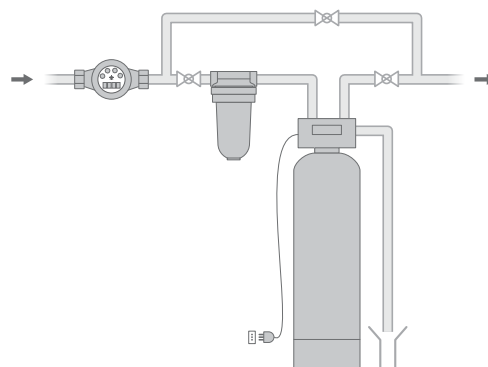

Neutral units are dolomite filters used to increase water hardness and/or pH. The channelling created by water on the filter media shall be periodically removed with a backwash. The backwash frequency can be programmed by time. The system is to be sized according to the flow rate required by the user.

Neutral units are made up of:

- head with hydropneumatic valve in plastic material and electronic timer ET 500 F
- cylinder in plastic material covered in fibreglass containing the active media of calcium carbonated (dolomite).

ITEM	ITEM CODE	UNIT PRICE	CONN.	MEDIA	FLOW RATE			DRAIN FITTING	BACKWASH DURATION	DIMENS. (ØxH) cm
					OPERATION	ΔP	PEAK			
		€		l	m³/h	bar	l/min	mm	min	
NEUTRAL 30	109.490.10	1.342,00	1¼ F	33	0,5	<0,3	10	25	15	25x111
NEUTRAL 45	109.510.10	1.533,00	1¼ F	48	0,7	<0,6	13	25	20	25x159
NEUTRAL 75	109.550.10	2.037,00	1¼ F	80	1,1	<0,6	20	25	25	33x159
NEUTRAL 110	109.570.10	2.731,00	1¼ F	116	1,7	<0,9	32	25	30	37x186
NEUTRAL 140 M	109.591.10	3.036,00	2" M	147	2,1	<0,7	40	25	35	41x190
NEUTRAL 200 M	109.611.10	4.905,00	2" M	213	3	<0,8	55	25	40	56x187
NEUTRAL 320 B	109.630.10	8.548,00	2" M	332	4,8	<0,9	88	40	20	61x225
NEUTRAL 500 B	109.690.10	10.026,00	2" M	530	7,5	<0,9	140	40	25	77x237


Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C; Electrical absorption: 12 VA

Guide to choice of Neutral

OPERATING FLOW RATE	≤ 0,5 m³/h	0,5 - 0,7 m³/h	0,7 - 1,1 m³/h	1,1 - 1,7 m³/h	1,7-2,1 m³/h	2,1 - 3 m³/h	3 - 4,8 m³/h	4,8 - 7,5 m³/h
MODEL	30	45	75	110	140	200	320	500

Denitrat

Nitrate removers

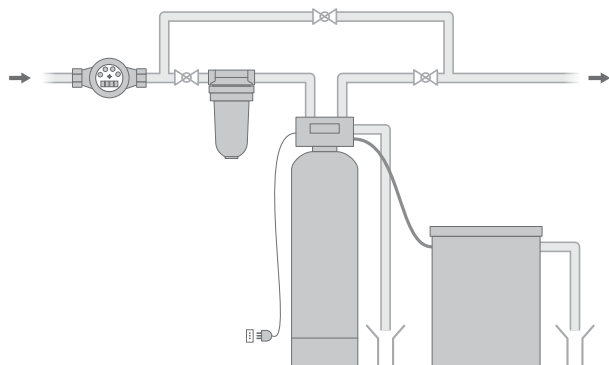

Denitrat units are anionic resin filters retaining nitrates present in water, to be regenerated with sodium chloride. Regeneration can be programmed by volume/time. The system is to be sized according to daily water consumption, peak flow rate and nitrates level.

- Denitrat units are made up of:
- head with hydropneumatic valve in plastic material and electronic timer VT 1000 AD
- cylinder in plastic material covered in fibreglass containing anionic resin for nitrates removal.
- brine tank.

ITEM	ITEM CODE	UNIT PRICE	CONN.	MEDIA	POTABLE USE			BRINE TANK CAPACITY	REGEN. DURATION	DIMENS.	
					OPERATION FLOW RATE	ΔP	PEAK FLOW RATE			CYLINDER (ØxH)	BRINE TANK (ØxH)
		€		l	l/h	bar	l/min	l	min	cm	cm
DENITRAT 30	110.500.30	2.962,00	1" ¼ F	30	900	<0,7	33	100	43	25x111	47x62
DENITRAT 45	110.520.30	3.708,00	1" ¼ F	45	1400	<0,8	41	100	36	25x159	47x62
DENITRAT 75	110.540.30	5.160,00	1" ¼ F	75	2300	<0,9	68	150	41	33x159	53x75
DENITRAT 110	110.560.30	7.080,00	1" ¼ F	110	3300	<1,2	80	200	47	37x186	53x100
DENITRAT 140	110.580.30	8.665,00	1" ¼ F	140	4200	<1,5	102	200	59	41x186	53x100
DENITRAT 200	110.600.30	12.713,00	1" ¼ F	200	6000	<1,6	117	300	84	56x183	62x106
DENITRAT 320B	110.620.30	21.464,00	2" M	320	9600	<1,5	176	520	38	61x235	78x111
DENITRAT 500B	110.640.30	28.683,00	2" M	500	15000	<1,6	275	850	53	77x237	104x109


Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C; Electrical absorption: 12 VA

Guide to choice of Denitrat

NITRATES		50 mg/l	60 mg/l	70 mg/l	80 mg/l	90 mg/l	100 mg/l
APARTMENTS	WATER CONSUMPTION						
n°	m³/day						
1-2	≤ 0,9	30	30	30	30	30	30
2-3	0,95 - 1,5	30	30	45	45	45	75
3-4	1,6 - 2,25	45	45	75	75	75	75
4-6	2,3 - 3,3	75	75	110	110	110	110
7-10	3,4 - 4,5	110	110	110	140	140	200
10-13	4,6 - 6	140	140	140	200	200	200
14-17	6,1 - 8,1	200	200	200	320	320	320
18-24	8,2 - 12	200	320	320	320	500	500
25-32	12,1-15	320	320	500	500	500	500

Dearsenic

Arsenic removers

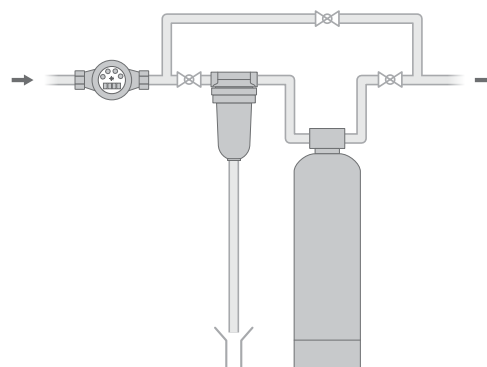

Dearsenic arsenic removers are water filters with selective resins used to retain the arsenic present in water. The system is to be sized according to the flow rate required by the user and the level of arsenic.

Dearsenic units are made up of:

- fitting in plastic material
- cylinder in plastic material covered in fibreglass containing the resins for arsenic adsorption.

ITEM	ITEM CODE	UNIT PRICE	CONN.	RESINS VOLUME	ARSENIC <10 µg/l		MAX LIFETIME*	DIMENS. (ØxH) cm
					FLOW RATE m³/h	ΔP bar		
		€		l			m³	
DEARSENIC 10	101.092.96	868,00	3/4"	10	0,3	≤ 1	400	21x60
DEARSENIC 20	101.092.97	1.541,00	3/4"	20	0,6	≤ 1	800	20x94
DEARSENIC 45	101.092.99	3.101,00	3/4"	45	1,35	≤ 1	1800	33x140
DEARSENIC 75	101.093.02	4.853,00	1 1/4"	75	2,25	≤ 1	3000	33x150

* Lifetime calculated considering a water with 50 µg/l of arsenic - Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C

Guide to choice of Dearsenic

MAX FLOW RATE	≤ 0,3 m³/h	0,3 - 0,6 m³/h	0,6 - 1,35 m³/h	1,35 - 2,25 m³/h
MODEL	10	20	45	75

Spare parts and accessories for water filters

ITEM	ITEM CODE	UNIT PRICE	PACK.
		€	Pcs.
SWITCH KIT R	600.070.10	45,10	1
REMOTE CONTROLLED OUTLET 220 V SW	500.040.50	299,00	1
QUARTZITE 3-5 MM 25 KG FOR DESABB	410.700.30	15,00	1
QUARTZITE 1-2 MM 25 KG FOR DESABB	410.700.40	15,00	1
QUARTZITE 0.8-1.2 MM 25 KG	410.700.50	15,00	1
QUARTZITE 0.4-0.8 MM 25 KG	410.700.55	15,00	1
QUARTZITE 5-8 MM 25 KG	410.700.25	17,50	1
MANGANESE DIOXIDE FOR DEFERR	410.700.65	13,00	1
1" 1/4 FITTING	454.150.15	9,70	1
KEYBOARD VT1000	600.480.80	29,40	1

ITEM	ITEM CODE	UNIT PRICE	PACK.
		€	Pcs.
PISTON KIT FOR VALVE 132	455.741.40	126,50	1
1" 1/4 VOLUMETRIC VALVE 132	600.340.40	302,00	1
ELECTRONIC CARD 500/1000	500.410.45	176,00	1
G SALT - 25 KG SACK	410.600.35	14,60	1
BRINE SUCTION HOSE PE LD 3/8" X 1/4"	455.900.05	1,40	1
GEL LITRE COUNTER	500.151.50	8,80	1
HOUSING FOR LITRE COUNTER SENSOR	454.700.10	0,25	1
COMPLETE BRINE VALVE 8/200 LT	456.400.10	81,50	1
GEL CHLORINE CELL	600.150.00	71,40	1
LIMESTONE FOR NEUTRAL 3.5-6 MM	410.701.40	0,50	1



Softening




Softeners

DrySoft / Decalux / Decal / Duplex

DrySoft

Ion exchange compact water softeners

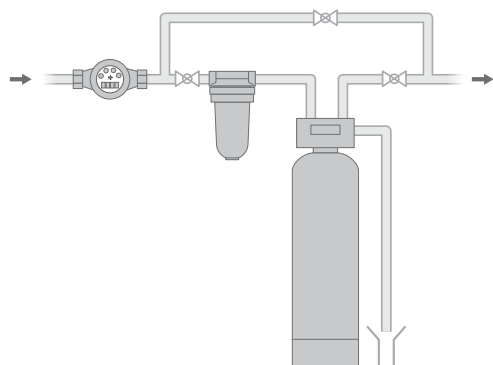

Dry Soft compact water softeners offer the features below:

- Wide range of models
- Compact design
- Statistical volumetric electronic timer, easy to use, with the function “scheduled servicing operations”
- Bypass included
- Operation with “dry” brine tank. Brine tank is generally dry since brine is prepared only upon regeneration
- Proportional regeneration


* A filter must be installed before the water softener

ITEM	ITEM CODE	UNIT PRICE	CONN.	RES. VOL.	CYCLIC CAPAC.	MAX FLOW RATE	AVERAGE WATER USED PER REGEN.	SALT RESERVE	SALT USED PER REGEN.	DIMENS.
		€		l	(m ³ x1 °f)	l/min	l	kg	(kg)	cm (LxHxZ)
DRY SOFT 11	109.780.10	1.470,00	3/4" M	11	50	18,3	59	50	1,4	34,5x66,6x57,3
DRY SOFT 15	109.780.20	1.626,00	3/4" M	15	68	25,0	80	75	1,9	34,5x80,6x57,3
DRY SOFT 20	109.780.30	1.707,00	3/4" M	20	102	33,3	101	75	2,5	34,5x80,6x57,3
DRY SOFT 26	109.780.40	1.786,00	3/4" M	26	133	43,3	128	125	3,3	34,5x108,5x57,3
DRY SOFT 32	109.780.50	1.871,00	3/4" M	32	163	53,3	156	125	4,0	34,5x108,5x57,3

Use: tec/pot; Water temperature 5-40 °C; Ambient temperature: 5-50 °C; Operating pressure 1,5-8 bar; Electrical absorption: 17 VA; Power supply: 230/50 V/Hz

Decalux

Ion exchange cabinet water softeners

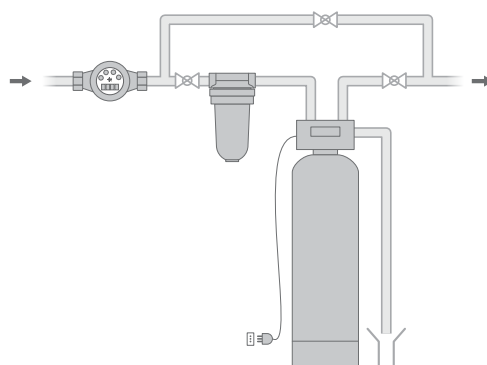

Decalux water softeners can be equipped with two different timers, both easy to use:

1. Timer VT 1000 AD shows low level of salt, amount of water that can be supplied between regenerations, amount of softened water used from last regeneration.
 - RESIN SELF DISINFECTION SYSTEM, LOW SALT ALARM, VOLUMETRIC ELECTRONIC TIMER.
2. Timer VT 2000 AD shows instant water consumption, low level of salt, amount of water that can be supplied between regenerations, amount of softened water used from last regeneration. Timer VT 2000 AD, in the BPA version, is preset to control the automatic mixing valve, thus keeping the residual hardness at the outlet constant according to the flow rate.
 - RESIN SELF DISINFECTION SYSTEM, LOW SALT ALARM, VOLUMETRIC ELECTRONIC TIMER, INSTRUCTIONS ON DISPLAY.



ITEM	ITEM CODE	UNIT PRICE	CONN.	RES. VOL.	CYCLIC CAPAC.	FLOW RATE FOR POTABLE USE* (H.L.<5)		BRINE TANK CAPACITY	AVERAGE WATER USED PER REG	SALT USED PER REGEN.	REGEN. DURATION	DIMENS. (LxHxZ)
						OPERATION	PEAK					
		€		l	(m³x1°f)	m³/h	l/min	l	l	(kg)	min	cm

DECALUX 5

DECALUX 5 VT 1000 AD	AD9.700.30	1.517,00	1¼"F	5	30	0,3	8	43	44	0,75	14	34x55x50
DECALUX 5 VT 2000 AD	AD9.700.40	1.757,00	1¼"F	5	30	0,3	8	43	44	0,75	14	34x55x50
DECALUX 5 VT 2000 AD BPA	AD9.700.4X	1.777,00	1¼"F	5	30	0,3	8	43	44	0,75	14	34x55x50

DECALUX 10

DECALUX 10 VT 1000 AD	AD9.715.30	1.668,00	1¼"F	10	60	0,6	16	86	76	1,5	26	40x78x60
DECALUX 10 VT 2000 AD	AD9.715.40	1.908,00	1¼"F	10	60	0,6	16	86	76	1,5	26	40x78x60
DECALUX 10 VT 2000 AD BPA	AD9.715.4X	1.928,00	1¼"F	10	60	0,6	16	86	76	1,5	26	40x78x60

DECALUX 15

DECALUX 15 VT 1000 AD	AD9.720.30	1.778,00	1¼"F	15	90	0,9	24	145	98	2,25	22	40x111x60
DECALUX 15 VT 2000 AD	AD9.720.40	2.018,00	1¼"F	15	90	0,9	24	145	98	2,25	22	40x111x60
DECALUX 15 VT 2000 AD BPA	AD9.720.4X	2.038,00	1¼"F	15	90	0,9	24	145	98	2,25	22	40x111x60

*Flow rate erogata senza by-pass di miscelazione - PRESSURE: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C

ITEM	ITEM CODE	UNIT PRICE	CONN.	RES. VOL.	CYCLIC CAPAC.	FLOW RATE POTABLE USE* (H.L.<5)		BRINE TANK CAPACITY	AVERAGE WATER USED PER REG	SALT USED PER REGEN.	REGEN. DURATION	DIMENS. (LxHxZ) cm
						OPERATION	PEAK					
		€		l	(m³ x 1°f)	m³/h	l/min	l	l	(kg)	min	

DECALUX 20

DECALUX 20 VT 1000 AD	AD9.725.30	1.842,00	1¼" F	20	120	1,2	32	145	131	3	29	40x111x60
DECALUX 20 VT 2000 AD	AD9.725.40	2.082,00	1¼" F	20	120	1,2	32	145	131	3	29	40x111x60
DECALUX 20 VT 2000 AD BPA	AD9.725.4X	2.102,00	1¼" F	20	120	1,2	32	145	131	3	29	40x111x60

DECALUX 25

DECALUX 25 VT 1000 AD	AD9.730.30	1.891,00	1¼" F	25	150	1,5	40	145	162	3,75	36	40x111x60
DECALUX 25 VT 2000 AD	AD9.730.40	2.131,00	1¼" F	25	150	1,5	40	145	162	3,75	36	40x111x60
DECALUX 25 VT 2000 AD BPA	AD9.730.4X	2.151,00	1¼" F	25	150	1,5	40	145	162	3,75	36	40x111x60

DECALUX 30

DECALUX 30 VT 1000 AD	AD9.735.30	1.916,00	1¼" F	30	180	1,8	48	145	195	4,50	43	40x111x60
DECALUX 30 VT 2000 AD	AD9.735.40	2.156,00	1¼" F	30	180	1,8	48	145	195	4,50	43	40x111x60
DECALUX 30 VT 2000 AD BPA	AD9.735.4X	2.176,00	1¼" F	30	180	1,8	48	145	195	4,50	43	40x111x60

DECALUX 45

DECALUX 45 VT 1000 AD	AD9.745.30	2.455,00	1¼" F	45	270	2,25	60	251	298	6,75	36	50 x134x70
DECALUX 45 VT 2000 AD	AD9.745.40	2.695,00	1¼" F	45	270	2,25	60	251	298	6,75	36	50x134x70
DECALUX 45 VT 2000 AD BPA	AD9.745.4X	2.715,00	1¼" F	45	270	2,25	60	251	298	6,75	36	50x134x70

DECALUX 60


DECALUX 60 VT 1000 AD	AD9.750.30	2.556,00	1¼" F	60	360	3	81	251	448	9	33	50x134x70
DECALUX 60 VT 2000 AD	AD9.750.40	2.796,00	1¼" F	60	360	3	81	251	448	9	33	50x134x70
DECALUX 60 VT 2000 AD BPA	AD9.750.4X	2.816,00	1¼" F	60	360	3	81	251	448	9	33	50x134x70

*Flow rate without mixing bypass - Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C

Guide to choice of Decalux

WATER HARDNESS		20/29 °f	30/34 °f	35/39 °f	40/44 °f	45/50 °f
APARTMENTS	WATER CONSUMPTION					
no.	m³/day					
1 - 2	≤ 1	10	10	10	10	15
2 - 3	1 - 1,7	15	15	15	20	20
3 - 5	1,7 - 2,5	15	20	20	25	30
5 - 7	2,5 - 3,75	20	25	30	45	45
7 - 10	3,75 - 4,65	25	30	45	45	60
10 - 13	4,65 - 6,15	30	45	45	60	-
13 - 16	6,15 - 7,5	45	45	60	-	-
16 - 20	7,5 - 9,3	45	60	-	-	-

Notice: The table "Guide to choice" only considers the daily water consumption, so please check the peak flow rate. If the peak flow rate is not suitable, choose the larger model of water softener. Recommended regeneration frequency is 2 days. Recommended residual hardness is 15 °f.

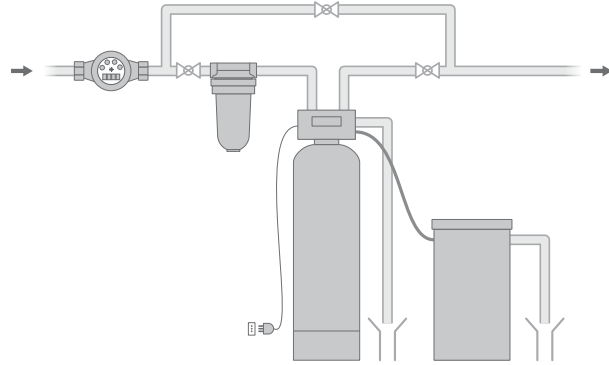

39

ITEM	ITEM CODE	UNIT PRICE	CONN.	RES. VOL.	CYCLIC CAPAC.	FLOW RATE POTABLE USE* (H.L.<5)		BRINE TANK CAPACITY	AVERAGE WATER USED PER REG	SALT USED PER REGEN.	REGEN. DURAT.	DIMENSIONS	
						OPERATION	PEAK					CYLINDER (ØxH)	BRINE TANK (ØxH)
		€		l	m³x10³	m³/h	l/min	l	l	(kg)	min	cm	cm

DECAL 30

DECAL 30 VT 1000 AD	AD9.825.30	1.912,00	1¼" F	30	180	1,8	48	100	195	4,5	43	25x111	47x62
DECAL 30 VT 2000 AD	AD9.825.40	2.152,00	1¼" F	30	180	1,8	48	100	195	4,5	43	25x111	47x62
DECAL 30 VT 2000 AD BPA	AD9.825.4X	2.172,00	1¼" F	30	180	1,8	48	100	195	4,5	43	25x111	47x62

DECAL 45

DECAL 45 VT 1000 AD	AD9.835.30	2.176,00	1¼" F	45	270	2,25	60	100	298	6,75	36	25x159	47x62
DECAL 45 VT 2000 AD	AD9.835.40	2.416,00	1¼" F	45	270	2,25	60	100	298	6,75	36	25x159	47x62
DECAL 45 VT 2000 AD BPA	AD9.835.4X	2.436,00	1¼" F	45	270	2,25	60	100	298	6,75	36	25x159	47x62

DECAL 60

DECAL 60 VT 1000 AD	AD9.840.30	2.396,00	1¼" F	60	360	3	81	150	448	9	33	33x134	53x75
DECAL 60 VT 2000 AD	AD9.840.40	2.636,00	1¼" F	60	360	3	81	150	448	9	33	33x134	53x75
DECAL 60 VT 2000 AD BPA	AD9.840.4X	2.656,00	1¼" F	60	360	3	81	150	448	9	33	33x134	53x75

DECAL 75

DECAL 75 VT 1000 AD	AD9.845.30	2.623,00	1¼" F	75	450	3,75	101	150	560	11,25	41	33x159	53x75
DECAL 75 VT 2000 AD	AD9.845.40	2.863,00	1¼" F	75	450	3,75	101	150	560	11,25	41	33x159	53x75
DECAL 75 VT 2000 AD BPA	AD9.845.4X	2.883,00	1¼" F	75	450	3,75	101	150	560	11,25	41	33x159	53x75
DECAL 75 M VT 1000 AD	AD9.845.35	2.703,00	2" M	75	450	3,75	110	150	560	11,25	41	33x159	53x75

DECAL 110

PROFESSIONAL LINE

DECAL 110 VT 1000 AD	AD9.850.30	3.326,00	1¼" F	110	660	4,4	117	200	795	16,5	47	37x186	53x100
DECAL 110 VT 2000 AD	AD9.850.40	3.566,00	1¼" F	110	660	4,4	117	200	795	16,5	47	37x186	53x100
DECAL 110 M VT 1000 AD	AD9.852.30	3.556,00	2" M	110	660	4,4	120	200	741	16,5	41	37x190	53x100
DECAL 110 M VT 2000 AD	AD9.852.40	3.796,00	2" M	110	660	4,4	120	200	741	16,5	41	37x190	53x100

DECAL 140

PROFESSIONAL LINE

DECAL 140 VT 1000 AD	AD9.855.30	3.916,00	1¼" F	140	840	5,6	117	300	995	21	59	41x186	62x106
DECAL 140 VT 2000 AD	AD9.855.40	4.156,00	1¼" F	140	840	5,6	117	300	995	21	59	41x186	62x106
DECAL 140 M VT 1000 AD	AD9.857.30	4.146,00	2" M	140	840	5,6	151	300	915	21	51	41x190	62x106
DECAL 140 M VT 2000 AD	AD9.857.40	4.386,00	2" M	140	840	5,6	151	300	915	21	51	41x190	62x106

DECAL 200

PROFESSIONAL LINE

DECAL 200 VT 1000 AD	AD9.860.30	6.380,00	1¼" F	200	1200	7	117	520	1420	30	84	56x183	78x111
DECAL 200 VT 2000 AD	AD9.860.40	6.620,00	1¼" F	200	1200	7	117	520	1420	30	84	56x183	78x111
DECAL 200 M VT 1000 AD	AD9.860.70	6.610,00	2" M	200	1200	7	160	520	1319	30	73	56x187	78x111
DECAL 200 M VT 2000 AD	AD9.860.80	6.850,00	2" M	200	1200	7	160	520	1319	30	73	56x187	78x111
DECAL 200 B VT 1000 AD	AD9.861.30	7.810,00	2" M	200	1200	7	188	520	1524	30	66	56x197	78x111
DECAL 200 B VT 2000 AD	AD9.861.40	8.050,00	2" M	200	1200	7	188	520	1524	30	66	56x197	78x111

*Flow rate erogata senza by-pass di miscelazione - PRESSURE: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C

ITEM	ITEM CODE	UNIT PRICE	CONN.	RES. VOL.	CYCLIC CAPAC.	FLOW RATE POTABLE USE* (H.L.<5)		BRINE TANK CAPACITY	AVERAGE WATER USED PER REG	SALT USED PER REGEN.	REGEN. DURAT.	DIMENSIONS	
						OPERATION	PEAK					CYLINDER (ØxH)	BRINE TANK (ØxH)
		€		l	m³x1°f	m³/h	l/min	l	l	(kg)	min	cm	cm

DECAL 250

PROFESSIONAL LINE

DECAL 250 M VT 1000 AD	AD9.863.30	8.307,00	2" M	250	1500	8,75	160	520	1635	37,5	91	61x225	78x111
DECAL 250 M VT 2000 AD	AD9.863.40	8.547,00	2" M	250	1500	8,75	160	520	1635	37,5	91	61x225	78x111
DECAL 250 B VT 1000 AD	AD9.862.30	9.507,00	2" M	250	1500	8,75	235	520	1671	37,5	34	61x235	78x111
DECAL 250 B VT 2000 AD	AD9.862.40	9.747,00	2" M	250	1500	8,75	235	520	1671	37,5	34	61x235	78x111

DECAL 320

PROFESSIONAL LINE

DECAL 320 B VT 1000 AD	AD9.865.30	10.365,00	2" M	320	1920	9,6	258	850	2188	48	38	61x235	104x109
DECAL 320 B VT 2000 AD	AD9.865.40	10.605,00	2" M	320	1920	9,6	258	850	2188	48	38	61x235	104x109

DECAL 500

PROFESSIONAL LINE

DECAL 500 B VT 1000 AD	AD9.870.30	12.100,00	2" M	500	3000	15	350	850	3208	75	53	77x237	104x109
DECAL 500 B VT 2000 AD	AD9.870.40	12.340,00	2" M	500	3000	15	350	850	3208	75	53	77x237	104x109

* Flow rate without mixing bypass - Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C


Guide to choice of Decal

WATER HARDNESS		20/29 °f	30/34 °f	35/39 °f	40/44 °f	45/50 °f
APARTMENTS	WATER CONSUMPTION					
no.	m³/day					
1 - 2	≤ 1	15	15	15	15	15
2 - 3	1 - 1,7	15	15	15	20	20
3 - 5	1,7 - 2,5	15	20	20	25	30
5 - 7	2,5 - 3,75	20	25	30	45	45
7 - 10	3,75 - 4,65	25	30	45	45	60
10 - 13	4,65 - 6,15	30	45	45	60	75
13 - 16	6,15 - 7,5	45	45	60	75	110
16 - 20	7,5 - 9,3	45	60	75	110	140
20 - 24	9,3 - 11,25	110	110	110	110	140
24 - 29	11,25 - 13,65	110	110	140	140	200
29 - 34	13,65 - 16	110	110	140	200	200
34 - 41	16 - 20,55	110	140	200	250	320
41 - 47	20,55 - 23,4	200	200	200	250	320
47 - 58	23,4 - 29,85	200	200	250	320	320
58 - 70	29,85 - 35,25	200	250	320	320	500
70 - 85	35,25 - 42	200	320	500	500	500

Notice: The table "Guide to choice" only considers the daily water consumption, so please check the peak flow rate. If the peak flow rate is not suitable, choose the larger model of water softener. Recommended regeneration frequency is 2 days. Recommended residual hardness is 15 °f.

Duplex

Ion exchange multi column water softeners

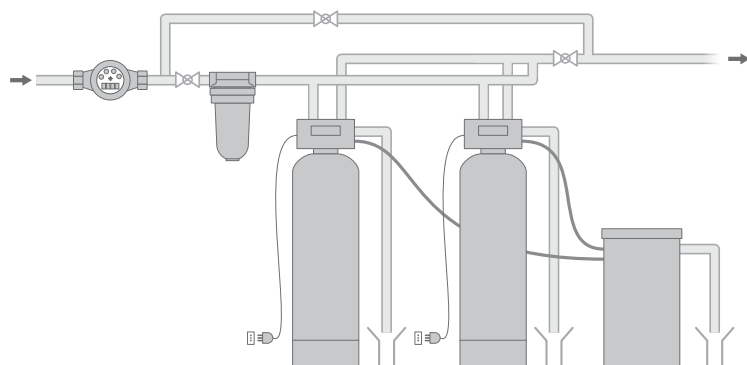

Duplex water softeners are equipped with the Timer VT 2000 AD which controls the alternate regeneration of the cylinders. In case of a huge water demand, the second cylinder comes to the aid of the first one. Duplex water softeners supply softened water 24 hours a day without a break. Timer VT 2000 AD shows instant water consumption, low level of salt, amount of water that can be supplied between regenerations, amount of softened water used from last regeneration.



- OVERFLOW FUNCTION, WHICH DOUBLES THE PEAK FLOW RATE COMPARED TO THE TRADITIONAL SINGLE AND MULTI COLUMN WATER SOFTENERS, RESIN SELF DISINFECTION SYSTEM, LOW SALT ALARM, VOLUMETRIC ELECTRONIC TIMER.

ITEM	ITEM CODE	UNIT PRICE	CONN.	RESIN VOL.	CYCLIC CAPAC.	FLOW RATE POTABLE USE* (H.L.<5)		BRINE TANK CAPACITY	AVERAGE WATER USED PER REG	SALT USED PER REGEN.	REGEN. DURAT.	DIMENSIONS	
						OPERATION	PEAK					CYLINDER (ØxH)	BRINE TANK (ØxH)
		€		l	m³x1°f	m³/h	l/min	l	l	(kg)	min	cm	cm

DUPLEX 15-200

DUPLEX 15 VT 2000 AD	AD9.915.40	4.002,00	1" F	15	90	0,9	48	100	98	2,25	22	24x111	47x62
DUPLEX 20 VT 2000 AD	AD9.920.40	4.076,00	1" F	20	120	1,2	64	100	131	3	29	24x111	47x62
DUPLEX 25 VT 2000 AD	AD9.925.40	4.244,00	1" F	25	150	1,5	80	100	162	3,75	36	25x111	47x62
DUPLEX 30 VT 2000 AD	AD9.930.40	4.304,00	1" F	30	180	1,8	96	100	195	4,5	43	25x111	47x62
DUPLEX 45 VT 2000 AD	AD9.945.40	4.832,00	1" F	45	270	2,25	120	100	298	6,75	36	25x159	47x62
DUPLEX 60 VT 2000 AD	AD9.960.40	5.272,00	1" F	60	360	3	162	150	448	9	33	33x134	53x75
DUPLEX 75 VT 2000 AD	AD9.975.40	5.726,00	1" F	75	450	3,75	202	150	560	11,25	41	33x159	53x75
DUPLEX 110 VT 2000 AD	AD9.980.40	7.132,00	1" F	110	660	4,4	234	200	795	16,5	47	37x186	53x100
DUPLEX 140 VT 2000 AD	AD9.985.40	8.312,00	1" F	140	840	5,6	234	300	995	21	59	41x186	62x106
DUPLEX 200 VT 2000 AD	AD9.990.40	13.240,00	1" F	200	1200	7	234	520	1420	30	84	56x183	78x111

DUPLEX 110 M - 250 M

DUPLEX 110 M VT 2000 AD	AD9.982.40	7.592,00	2" M	110	660	4,4	240	200	741	16,5	41	37x190	53x100
DUPLEX 140 M VT 2000 AD	AD9.987.40	8.772,00	2" M	140	840	5,6	302	300	915	21	51	41x190	62x106
DUPLEX 200 M VT 2000 AD	AD9.990.80	13.700,00	2" M	200	1200	7	320	520	1319	30	73	56x187	78x111
DUPLEX 250 M VT 2000 AD	AD9.991.60	17.095,00	2" M	250	1500	8,75	320	520	1635	37,5	91	61x225	78x111

DUPLEX 200 B - 500 B

DUPLEX 200 B VT 2000 AD	AD9.991.40	16.100,00	2" M	200	1200	7	376	520	1524	30	66	56x197	78x111
DUPLEX 250 B VT 2000 AD	AD9.991.80	19.495,00	2" M	250	1500	8,75	470	520	1671	37,5	34	61x235	78x111
DUPLEX 320 B VT 2000 AD	AD9.992.40	21.205,00	2" M	320	1920	9,6	516	850	2188	48	38	61x235	104x109
DUPLEX 500 B VT 2000 AD	AD9.994.40	24.680,00	2" M	500	3000	15	700	850	3208	75	53	77x237	104x109

* Flow rate without mixing bypass - Pressure: 2-6 bar; Water temperature: 5-30 °C; Ambient temperature: 5-40 °C

Guide to choice of Duplex

WATER HARDNESS		20/29 °f	30/34 °f	35/39 °f	40/44 °f	45/50 °f
APARTMENTS	WATER CONSUMPTION					
no.	m ³ /day					
3 - 4	≤ 2,5	15	15	15	15	15
5 - 7	2,5 - 3,4	15	15	15	20	20
8 - 11	3,4 - 5	15	20	20	25	30
12 - 16	5 - 7	20	25	30	45	45
17 - 21	7 - 10	25	45	45	60	60
22 - 30	10 - 15	45	45	60	75	110
31 - 38	15 - 18,75	45	60	75	110	110
39 - 49	18,75 - 25	60	110	110	140	200
50 - 58	25 - 30	75	110	140	200	200
59 - 68	30 - 34,2	110	110	140	200	200
69 - 83	34,2 - 41	110	140	200	200	250
84 - 100	41 - 50	140	200	200	250	320
101 - 124	50 - 60	140	200	250	320	500
125 - 145	60 - 75	200	250	320	500	500

Notice: The table "Guide to choice" only considers the daily water consumption, so please check the peak flow rate. If the peak flow rate is not suitable, choose the larger model of water softener. Recommended regeneration frequency is 2 days. Recommended residual hardness is 15 °f.

Spare parts and accessories for water softeners

ITEM	ITEM CODE	UNIT PRICE €	PACK. Pcs.	CONNECTION	MATERIAL	USE
AUTOMATIC MIX VALVE	109.200.50	455,00	1	1½" F - 1" M	PP	For DECALUX and DECAL
MANUAL MIX VALVE	109.201.00	112,00	1	1½" F - 1" M	PP	For DECALUX and DECAL
MANUAL MIX VALVE	109.201.80	119,00	1	1" 1/4 - 3/4" M	PP	For DECALUX and DECAL
ADAPTOR SET	109.200.12	53,00	1	1½" F - ¾" M	PP	For DECALUX, DECAL and DUPLEX
ADAPTOR SET (M MODELS)	109.200.14	116,00	1	2" F - 1½" M	BRASS	For DECAL and DUPLEX
ADAPTOR SET (B MODELS)	109.200.15	185,00	1	2 ¼" F - 2" M	BRASS	For DECAL and DUPLEX
DISINFECTION SYSTEM	109.200.30	347,00	1	-	-	Junction box for resins disinfection for all water softeners up to 300 litres of resin
CATIONIC RESIN	410.700.20	162,50	1			
QUARTZITE 3-5 MM - 25 KG	410.700.30	15,00	1			
BRINE SUCTION HOSE PE LD 3/8" X ¼"	455.900.05	1,40	1			
LITRE COUNTER	500.151.50	8,80	1			
1" ¼ FITTING	454.150.15	9,70	1			
HOUSING FOR LITRE COUNTER SENSOR	454.700.10	0,25	1			
KEYBOARD VT1000	600.480.80	29,40	1			
BRINE VALVE 8/200 LT	456.400.10	81,50	1			
GEL CHLORINE CELL	600.150.00	71,40	1			
PISTON KIT FOR VALVE 132	455.741.40	126,50	1			
1" ¼ VOLUMETRIC VALVE 132	600.340.40	302,00	1			
ELECTRONIC CARD 500/1000	500.410.45	176,00	1			
G SALT - 25 KG SACK	410.600.35	14,60	1			
SWITCH KIT R	600.070.10	45,10	1	-	-	Regeneration signal system for timers



Dosing



Anti scale proportional dosing units

ZeroCal+ Mini / ZeroCal+ Maxi / ZeroCal+ Plant / Dosaphos

46



Magnetic scale reducers

Antikal

54



Metering pumps

Dosamatic

55

Zerocal+ Mini

Anti scale proportional dosing units with liquid refill and **290 ml tank** for tight spaces



LINE



DIMA



VERTICAL DIMA



UNIVERSAL DIMA

Zerocal+ are anti scale proportional dosing units for boilers, water heaters, washing machines and dishwashers. Zerocal+ units use the technology with an immersion pump that does not damage even though there has been no anti scale liquid for long. The small sizes, the ergonomic shape and the adjustable connections make installation fast and easy.

The special Dima connections as well as the two new Vertical and Universal Dima allow to easily install the dosing unit in the tight spaces between the wall and the boiler. The Universal Dima version combines the versatility of the traditional Dima connection with the new Vertical Dima.

Zerocal+ do not require power supply.

To refill the anti scale product it is not necessary to close water supply; it is enough to loosen the tank, pour in Zerocal+ DOSE and place the tank back in.

Each pack includes a Zerocal+ DOSE 500 ml refill.









Pallbox ZeroCal+ Mini
for 24 packs and pallbox
ZeroCal+ Dose for 12
packs



The **SENSOR** version is fitted with a sound and visual signal system warning you when it is time to refill the anti scale liquid



“Find out the benefit of the two new compact and versatile Vertical and Universal Dima connections (GEL patent)”



**DIRECT
EASY INSTALLATION**
(GEL PATENT)

**TWO POSSIBLE
INSTALLATIONS**
(GEL PATENT)

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MAX PRESS.	MIN-MAX FLOW RATE ($\Delta P = 0,5$ bar)	TANK	INTERAXIS	DIMENSIONS (LxHxZ)	ALARM
		€	pcs.		bar	m ³ /h	ml	cm	cm	
ZEROCAL* MINI LINE SENSOR 1/2"	105.079.00	127,00	3	1/2-1/2" M	1,5÷6	0,18-0,75	290	7,6	8x17,5x11,3	YES
ZEROCAL* MINI DIMA SENSOR 1/2"	105.078.00	139,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	290	5,7	8x22,4x11,3	YES
ZEROCAL* MINI VERTICAL DIMA SENSOR 1/2"	105.078.60	139,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	290	3	8x23,7x11,3	YES
ZEROCAL* MINI UNIVERSAL DIMA SENSOR 1/2"	105.078.80	139,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	290	5,4 horiz. 3,0 vert.	8x23,7x11,3	YES
ZEROCAL* MINI LINE BASIC 1/2"	105.079.40	95,90	3	1/2-1/2" M	1,5÷6	0,18-0,75	290	7,6	8x17,5x11,3	NO
ZEROCAL* MINI DIMA BASIC 1/2"	105.078.40	109,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	290	5,7	8x22,4x11,3	NO
ZEROCAL* MINI VERTICAL DIMA BASIC 1/2"	105.078.70	109,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	290	3	8x23,7x11,3	NO
ZEROCAL* MINI UNIVERSAL DIMA BASIC 1/2"	105.078.90	109,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	290	5,4 horiz. 3,0 vert.	8x23,7x11,3	NO

Water temperature: 5-40 °C; Ambient temperature: 5-50 °C – Battery: 3V Lithium CR 2032
Material: pump in polyoxymethylene (POM) and tank in polyethylene (PE)

Zerocal+ Maxi

Anti scale proportional dosing units with liquid refill and **680 ml tank** for a long lifetime



LINE



DIMA



VERTICAL DIMA



UNIVERSAL DIMA

Zerocal+ are anti scale proportional dosing units for boilers, water heaters, washing machines and dishwashers. Zerocal+ units use the technology with an immersion pump that does not damage even though there has been no anti scale liquid for long. The small sizes, the ergonomic shape and the adjustable connections make installation fast and easy.

The special Dima connections as well as the two new Vertical and Universal Dima allow to easily install the dosing unit in the tight spaces between the wall and the boiler. The Universal Dima version combines the versatility of the traditional Dima connection with the new Vertical Dima.

Zerocal+ do not require power supply.

To refill the anti scale product it is not necessary to close water supply; it is enough to loosen the tank, pour in Zerocal+ DOSE and place the tank back in.

Each pack includes a Zerocal+ DOSE 500 ml refill.









Pallbox ZeroCal+ Mini for 24 packs and pallbox ZeroCal+ Dose for 12 packs



The **SENSOR** version is fitted with a sound and visual signal system warning you when it is time to refill the anti scale liquid



“Find out the benefit of the two new compact and versatile Vertical and Universal Dima connections (GEL patent)”



**DIRECT
EASY INSTALLATION**
(GEL PATENT)

**TWO POSSIBLE
INSTALLATIONS**
(GEL PATENT)

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MAX PRESS.	MIN-MAX FLOW RATE ($\Delta P = 0,5$ bar)	TANK	INTERAXIS	DIMENSIONS (LxHxZ)	ALARM
		€	pcs.		bar	m ³ /h	ml	cm	cm	
ZEROCAL* MAXI LINE SENSOR 1/2"	105.075.00	125,00	3	1/2-1/2" M	1,5÷6	0,18-0,75	680	7,6	11x21x13,3	YES
ZEROCAL* MAXI DIMA SENSOR 1/2"	105.076.00	143,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	680	5,7	11x26x13,3	YES
ZEROCAL* MAXI VERTICAL DIMA SENSOR 1/2"	105.076.20	143,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	680	3	11x27,3x13,3	YES
ZEROCAL* MAXI UNIVERSAL DIMA SENSOR 1/2"	105.076.70	143,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	680	5,4 horiz. 3,0 vert.	11x27,3x13,3	YES
ZEROCAL* MAXI LINE BASIC 1/2"	105.075.10	97,90	3	1/2-1/2" M	1,5÷6	0,18-0,75	680	7,6	11x21x13,3	NO
ZEROCAL* MAXI DIMA BASIC 1/2"	105.076.10	111,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	680	5,7	11x26x13,3	NO
ZEROCAL* MAXI VERTICAL DIMA BASIC 1/2"	105.076.30	111,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	680	3	11x27,3x13,3	NO
ZEROCAL* MAXI UNIVERSAL DIMA BASIC 1/2"	105.076.80	111,00	3	1/2-1/2" F	1,5÷6	0,18-0,75	680	5,4 horiz. 3,0 vert.	11x27,3x13,3	NO
ZEROCAL* MAXI DIMA SENSOR 3/4"	105.076.06	160,00	3	3/4-3/4" F	1,5÷6	0,18-0,84	680	5,7	11x26x13,3	YES
ZEROCAL* MAXI DIMA BASIC 3/4"	105.076.16	129,00	3	3/4-3/4" F	1,5÷6	0,18-0,84	680	5,7	11x26x13,3	NO

Water temperature: 5-40 °C; Ambient temperature: 5-50 °C – Battery: 3V Lithium CR 2032
Material: pump in polyoxymethylene (POM) and tank in polyethylene (PE)

Dosaphos



Anti scale and anti corrosion proportional dosing units with powder refill



DOSAPHOS 200, 250 and VERTICAL DIMA are anti scale and anti corrosion dosing units for boilers, water heaters, washing machines and dishwashers. The operation is based on the automatic and proportional dosing of the Gelphos product, with chelating and sequestering action, able to:

- prevent calcium carbonate deposits (no scale)
- form a protection film on the internal surface of pipes (no corrosion).

The new quick coupling renews the line and allows to install the dosing unit in a fast and easy way (compared to the old Dosaphos units with 4 screws, the quick coupling has just one safety screw). The adjustable connection flange between the venture system and the dosing body allows to install Dosaphos units either on horizontal or vertical pipes.

Dosaphos DIMA, and particularly VERTICAL DIMA can be easily installed in the tight spaces between the wall and the boiler thanks to the special Dima connections.

Dosaphos 250 and Dosaphos Dima are fitted with the Acquastop device, which avoids to build the cut-out bypass of the system and allows to refill the product easily without closing water supply.

Each pack includes a Gelphos Rapid refill.

Material: head in brass, housing in SAN.



Antiscale KIT

Anti scale proportional dosing units for water systems with liquid refill






Anti scale kits include:

- 1 Dosaphos
- 8 Gelphos Rapid stick refills for 8 months lifetime





“Find out the benefit of the two new compact and versatile FAST connections, now also available in the new convenient Vertical DIMA version (GEL patent)”



**DIRECT
EASY INSTALLATION
(GEL PATENT)**

ITEM	ITEM CODE	UNIT PRICE	PACK.	BY-PASS	CONN.	MAX PRESS.	FLOW RATE ($\Delta P = 0,2$ bar)	MAX DOSAGE	USE	DIMENS. (LxH)
		€	pcs.			bar	m ³ /h	mg/l		cm
DOSAPHOS 200 ½"	105.010.60	65,70	6	No	1/2-1/2" F	10	2	4 ppm	tec/pot	6x14
DOSAPHOS 200 FAST ½"	* 105.010.70	69,00	6	No	1/2-1/2" F	10	2	4 ppm	tec/pot	4x14
DOSAPHOS 250 ½"	105.030.80	82,00	6	Yes	1/2-1/2" F	10	2	4 ppm	tec/pot	6x15
DOSAPHOS 250 FAST ½"	* 105.030.90	85,00	6	Yes	1/2-1/2" F	10	2	4 ppm	tec/pot	4x15
DOSAPHOS DIMA ½"	* 105.050.75	98,90	6	Yes	1/2-1/2" F	10	1,5	4 ppm	tec/pot	4x19,5
DOSAPHOS VERTICAL DIMA ½"	** 105.050.95	103,00	6	Yes	1/2-1/2" F	10	1,5	4 ppm	tec/pot	2,8x20,5

ITEM	ITEM CODE	UNIT PRICE	PACK.	DESCRIPTION
		€	pcs.	
ANTI SCALE KIT 200 ½"	104.510.90	87,50	3	ANTI SCALE KIT 200 ½" contains: 1 Dosaphos 200 + 8 stick refills Gelphos Rapid + Small wrench
ANTI SCALE KIT 200 FAST ½"	* 104.510.80	91,00	3	ANTI SCALE KIT 200 FAST contains: 1 Dosaphos fast 200 + 8 stick refills Gelphos Rapid + Small wrench
ANTI SCALE KIT 250 ½"	104.520.90	103,50	3	ANTI SCALE KIT 250 contains: 1 Dosaphos 250 + 8 stick refills Gelphos Rapid + Small wrench
ANTI SCALE KIT 250 FAST ½"	* 104.520.80	107,00	3	ANTI SCALE KIT 250 FAST contains: 1 Dosaphos 250 FAST + 8 stick refills Gelphos Rapid + Small wrench
ANTI SCALE KIT DIMA ½"	* 104.560.90	120,50	3	ANTI SCALE KIT DIMA contains: 1 Dosaphos DIMA + 8 stick refills Gelphos Rapid + Small wrench
ANTI SCALE KIT VERTICAL DIMA ½"	** 104.560.50	125,00	3	ANTI SCALE KIT VERTICAL DIMA contains: 1 Dosaphos vertical DIMA + 8 stick refills Gelphos Rapid + Small wrench

* Available from April 2019. ** Available from June 2019.
Water temperature: 5-40 °C; Ambient temperature: 5-50 °C

Zerocal+ Plant

NEW

Anti scale proportional dosing units for water systems with liquid refill

Zerocal+ Plant does not require power supply and is fitted with a sound and visual signal system warning you when it is time to refill the anti scale liquid (yellow led) and when it is time to replace the battery (red led).


The new 3/4" connections allow to install the dosing unit in most systems where it can be installed. The 3/4" connections, along with the 1300 ml tank guaranteeing a long lifetime and with the sound-visual alarm warning when it is time to refill, make the dosing unit unique and easy to install.

The ergonomic shape and the adjustable connections make installation fast and easy even in small spaces.

Each pack includes a Zerocal DOSE refill.

Material for pump and tank:
POM/ PE.

To refill the anti scale product it is not necessary to close water supply; it is enough to unscrew the tank, pour in Zerocal DOSE and place the tank back in.

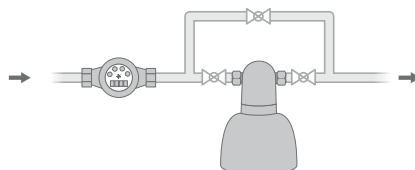

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MAX PRESS.	FLOW RATE MIN-MAX (ΔP = 0,5 bar)	TANK	INTERAXIS	DIMENSIONS (LxHxZ)
		€	pcs.		bar	m³/h	ml	cm	cm
ZEROCAL+ PLANT 3/4"	105.077.10	164,00	2	3/4-3/4" F	1,5÷6	0,18-0,84	1300	5,7	17x22x14,5

Water temperature: 5-40 °C; Ambient temperature: 5-50 °C; Battery: 3V Lithium CR 2032

Dosaphos Plant


Anti scale and anti corrosion proportional dosing units for water systems with powder refill

DOSAPHOS 600 Plant and 700 Plant are anti scale and anti corrosion dosing units for water systems, storage water heaters and large heat exchangers. The operation is based on the automatic and proportional dosing of the Gelphos product, with chelating and sequestering action, able to:

- prevent calcium carbonate deposits (no scale)
- form a protection film on the internal surface of pipes (no corrosion).

Each pack includes a Gelphos P refill.

Material: head in brass,
housing in SAN.

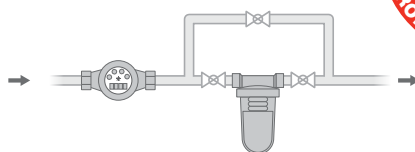

600



700

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MAX PRESS.	FLOW RATE (ΔP = 0,2 bar)	MAX DOSAGE	USE	DIMENS. (LXH)
		€	pcs.		bar	m³/h	mg/l		cm
DOSAPHOS 600 PLANT	105.070.10	113,00	1	3/4 - 3/4" F	10	5,8	4 ppm	tec/pot	11x23
DOSAPHOS 700 PLANT	105.070.00	163,00	1	1 - 1" F	10	5,8	4 ppm	tec/pot	13x23

Water temperature: 5-40 °C; Ambient temperature: 5-50 °C

Zerocal+ Dose

Anti scale liquid for Zerocal+.
Ready to use

Ready-to-use liquid product, formulated with food grade raw materials for the anti scale treatment of boilers, heat exchangers and water systems. Regular dosing of Zerocal+ DOSE allows a 15-20% energy saving in time and a longer average lifetime of heat exchangers and water household appliances.

Can be used with Zerocal+ Mini, Maxi, Plant and compatible models.



ITEM	ITEM CODE	UNIT PRICE €	PACK. CONTENTS	PCS. PER PACK	USE
ZEROCAL+ DOSE	107.019.10	37,70	4 bottles 500 ml each	6	pot
ZEROCAL+ DOSE	107.019.25	15,30	1 l. can	6	
ZEROCAL+ DOSE	107.019.30	64,30	5 l. can	1	

Gelphos Rapid

Anti scale powder for Dosaphos.
Ready to use

Ready-to-use product in stick, formulated with food grade raw materials for the anti scale treatment of boilers, heat exchangers and water systems. Regular dosing of Gelphos Rapid allows a 15-20% energy saving in time and a longer average lifetime of heat exchangers and water household appliances. To be used with dosing units Dosaphos 200, 250 and Dima.

Can be used with Dosaphos 600, 700 and compatible models.



ITEM	ITEM CODE	UNIT PRICE €	PACK. CONTENTS	PCS. PER PACK	USE
GELPHOS RAPID	107.011.60	25,40	8 stick refills	6	tec/pot

Gelphos P

Anti scale powder for Dosaphos.
To be mixed

Product in powder to be mixed, formulated with food grade raw materials for the anti scale treatment of boilers, heat exchangers and water systems. Regular dosing of Gelphos P o P10 allows a 15-20% energy saving in time and a longer average lifetime of heat exchangers and water household appliances. To be used with dosing units Dosaphos 600 and 700.

Can be used with Dosaphos 600, 700 and compatible models.



ITEM	ITEM CODE	UNIT PRICE €	PACK. CONTENTS	PCS. PER PACK	USE
GELPHOS P	107.010.50	19,80	1 kg	12	tec/pot
GELPHOS P 10	107.010.30	172,00	10 kg	1	

Spare parts and accessories for dosing units

ITEM	ITEM CODE	UNIT PRICE €	PACK. pcs.	USE
SMALL WRENCH	450.950.40	4,90	1	Wrench for DOSAPHOS 200/250/DIMA
BIG WRENCH	125.210.50	14,80	1	Wrench for DOSAPHOS 700
HOUSING WITH OR FOR DOSAPHOS 200-250-DIMA	600.071.55	10,20	1	
OR FOR HOUSING DOSAPHOS 200-250-DIMA	453.400.70	0,13	1	
BELLOWS FOR DOSAPHOS 200-250-DIMA	455.100.10	1,60	1	
HOUSING FOR DOSAPHOS 700	600.071.22	7,00	1	

Antikal




Magnetic scale reducers for boilers and heat exchangers



MAGNUM

MEDIUM

MINI

ANTIKAL
miniANTIKAL
Medium

ANTIKAL Magnum

Antikal units are scale reducers with permanent magnets preventing scale deposits on systems. Antikal units are available in three different models:


- Antikal mini, suitable for installation before wall boilers and small heat exchangers.
- Antikal medium, suitable for installation on boilers, water heaters, washing machines and dishwashers.
- Antikal magnum, suitable for installation before water systems, storage water heaters and large heat exchangers.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MAX PRESSURE	FLOW RATE ($\Delta P = 0,2$ bar)	MAX MAGNETIC INDUCTION	DIMENSIONS ($\varnothing \times L$)
		€	pcs.	F	bar	l/h	Gauss	mm
ANTIKAL MINI	125.010.00	52,40	12	1/2" - 1/2"	10	2500	1900	42x57
ANTIKAL MEDIUM	125.020.00	73,40	12	3/4" - 3/4"	10	2500	1950	42x81
ANTIKAL MAGNUM	125.030.00	130,00	6	1" - 1"	10	7600	2400	55x118,5

Water temperature: 5-90 °C; Ambient temperature: 5-50 °C

Dosamatic PC / PCse / PCS / PCSse

Analog constant metering pumps

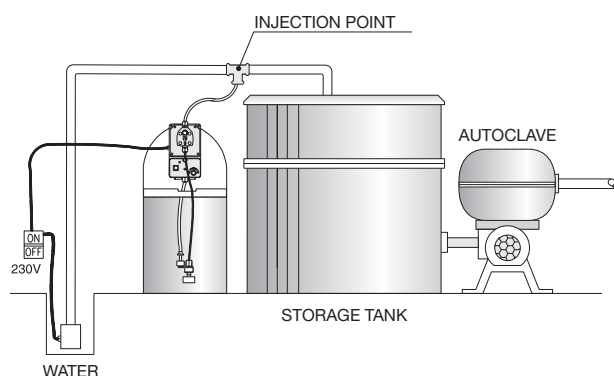

EXAMPLE OF DISINFECTING CONSTANT DOSING.
FOR OTHER KINDS OF DOSING REMOVE STORAGE TANK.



Analog constant metering pumps are fitted with:

- foot filter
- suction and delivery connections
- injection connection
- suction and delivery hoses
- level probe (for PCS models only)

The SE version is assembled on a 100 l. tank.

DOSAMATIC PC and PCS constant metering pumps are suitable for treating water with a flow rate which is constant in time. They can also be installed in parallel to booster pumps (with surge tanks use DOSAMATIC PPI). Dosage can be adjusted from 0 to 100% of the maximum flow rate of the pump. Pumps can be used for disinfection, anti scale and anti corrosion treatments, conditioning for potable and technical use.

ITEM	ITEM CODE	UNIT PRICE	DOSAGE						ELECTR. ABSORP.	DIMENS. (LxHxZ)/(ØxH)
			INJECTION CONNECTION	FLOW RATE	MAX PRESSURE	SINGLE INJECTION	MAX SUCTION HEIGHT	DEGREE OF PROTECT.		
		€		l/h	bar	cc	m	IP	W	cm

WITHOUT TANK AND WITHOUT LEVEL PROBE

DOSAMATIC PC	106.110.10	428,00	3/8" - 1/2" M	4	10	0,37	1,5	65	16	10,7x21x12,5
DOSAMATIC PC BIG	106.115.10	616,00	3/8" - 1/2" M	10	10	0,93	1,5	65	22	10,7x21x12,5

WITHOUT TANK AND WITH LEVEL PROBE

DOSAMATIC PCS	106.130.10	518,00	3/8" - 1/2" M	4	10	0,37	1,5	65	16	10,7x21x12,5
DOSAMATIC PCS BIG	106.135.10	706,00	3/8" - 1/2" M	10	10	0,93	1,5	65	22	10,7x21x12,5

WITH 100 L. TANK AND WITHOUT LEVEL PROBE

DOSAMATIC PC/SE	106.110.1S	697,00	3/8" - 1/2" M	4	10	0,37	1,5	65	16	44X101
DOSAMATIC PC/SE BIG	106.115.1S	885,00	3/8" - 1/2" M	10	10	0,93	1,5	65	22	44X101


WITH 100 L. TANK AND LEVEL PROBE

DOSAMATIC PCS/SE	106.130.1S	787,00	3/8" - 1/2" M	4	10	0,37	1,5	65	16	44X101
DOSAMATIC PCS/SE BIG	106.135.1S	975,00	3/8" - 1/2" M	10	10	0,93	1,5	65	22	44X101

Additive temperature: 5-50 °C; Ambient temperature: 5-40 °C; Voltage: 230V-50Hz.

Dosamatic PP / PPse / PPI / PPIse

Digital constant-proportional metering pumps

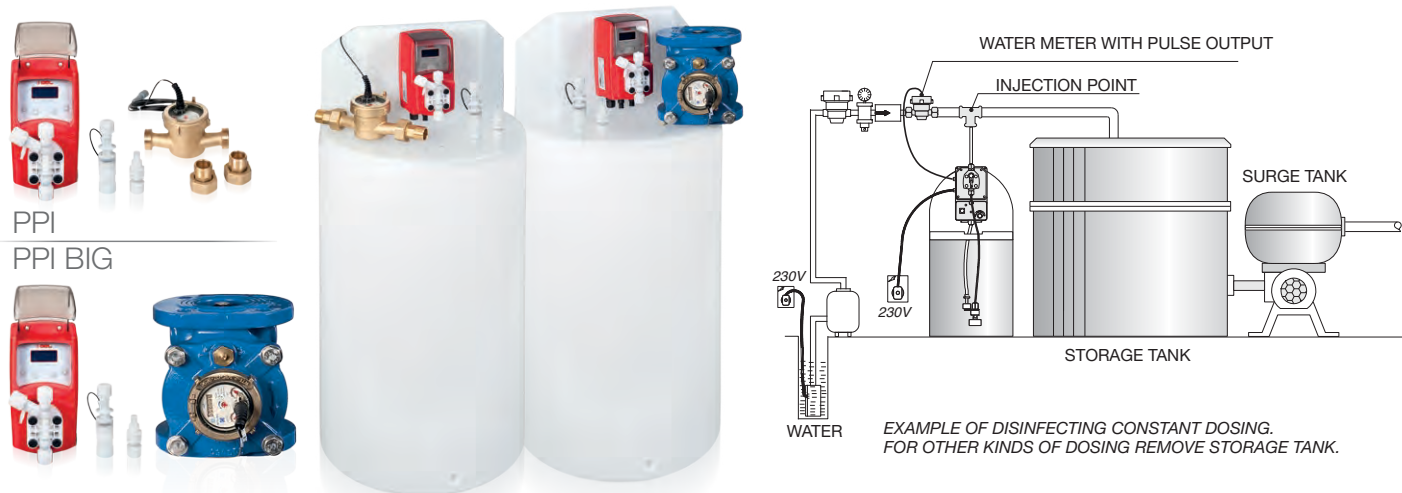

Digital constant-proportional metering pumps are fitted with:

- foot filter
- suction and delivery connections
- injection connection
- suction and delivery hoses
- level probe
- water meter with pulse output (for PPI models only)

The SE version is assembled on a 100 l. tank.

DOSAMATIC PP and PPI metering pumps, with constant and/or constant/proportional dosing, are able to dose the chemical according to the water flow thanks to the water meter with pulse output (standard in PPI model and accessory for PP model).

Dosage can be adjusted in the different modes below:

Constant Pump doses with constant frequency according to the values set during programming.

Divide The pulses given by a meter connected to the pump are divided by the value set during programming.

Multiply The pulses given by a meter connected to the pump are multiplied by the value set during programming.

PPM The pulses given by a meter connected to the pump determine the dosage according to the value of mg/l set.

Batch The pulse given by an external contact starts the dosing. Pump can be programmed to dose a specific quantity.

Volt The voltage supplied to the pump determines the proportional dosing according to the "min" and "max" values set during programming.

mA The power supplied to the pump determines the proportional dosing according to the "min" and "max" values set during programming.

ITEM	ITEM CODE	UNIT PRICE	DOSAGE						WATER METER				ELECTRIC. ABSORP.	DIMENS. (LxHxZ)/(ØxH)
			INJECTION CONNECTION	FLOW RATE	MAX PRESS.	SINGLE INJECT.	MAX SUCTION HEIGHT	DEGREE OF PROT.	CONN.	MAX PRESS.	MAX FLOW RATE	RATIO PULSES/ LITRES		
		€		l/h	bar	cc	m	IP		bar	m³/h		W	cm

WITHOUT TANK, WITHOUT WATER METER PO, WITH LEVEL PROBE

DOSAMATIC PP	106.191.X5	672,00	3/8"-1/2"M	4	10	0,37	1,5	65	-	-	-	-	16	10,7x21x12,5
DOSAMATIC PP BIG	106.195.X5	894,00	3/8"-1/2"M	10	10	0,93	1,5	65	-	-	-	-	22	10,7x21x12,5

WITHOUT TANK, WITH LEVEL PROBE AND WATER METER PO

DOSAMATIC PPI ½"	106.191.15	819,00	3/8"-1/2"M	4	10	0,37	1,5	65	½"	16	3	4/1	16	10,7x21x12,5
DOSAMATIC PPI ¾"	106.191.25	843,00	3/8"-1/2"M	4	10	0,37	1,5	65	¾"	16	5	4/1	16	10,7x21x12,5
DOSAMATIC PPI 1"	106.191.35	929,00	3/8"-1/2"M	4	10	0,37	1,5	65	1"	16	7	4/1	16	10,7x21x12,5
DOSAMATIC PPI 1¼"	106.191.45	990,00	3/8"-1/2"M	4	10	0,37	1,5	65	1¼"	16	10	4/1	16	10,7x21x12,5
DOSAMATIC PPI 1½"	106.191.55	1.206,00	3/8"-1/2"M	4	10	0,37	1,5	65	1½"	16	20	4/1	16	10,7x21x12,5
DOSAMATIC PPI 2"	106.191.65	1.677,00	3/8"-1/2"M	4	10	0,37	1,5	65	2"	16	30	4/1	16	10,7x21x12,5
DOSAMATIC PPI BIG ½"	106.195.15	1.041,00	3/8"-1/2"M	10	10	0,93	1,5	65	½"	16	3	4/1	22	10,7x21x12,5
DOSAMATIC PPI BIG ¾"	106.195.25	1.065,00	3/8"-1/2"M	10	10	0,93	1,5	65	¾"	16	5	4/1	22	10,7x21x12,5
DOSAMATIC PPI BIG 1"	106.195.35	1.151,00	3/8"-1/2"M	10	10	0,93	1,5	65	1"	16	7	4/1	22	10,7x21x12,5
DOSAMATIC PPI BIG 1¼"	106.195.45	1.212,00	3/8"-1/2"M	10	10	0,93	1,5	65	1¼"	16	10	4/1	22	10,7x21x12,5
DOSAMATIC PPI BIG 1½"	106.195.55	1.428,00	3/8"-1/2"M	10	10	0,93	1,5	65	1½"	16	20	4/1	22	10,7x21x12,5
DOSAMATIC PPI BIG 2"	106.195.65	1.899,00	3/8"-1/2"M	10	10	0,93	1,5	65	2"	16	30	4/1	22	10,7x21x12,5
DOSAMATIC PPI BIG DN65	106.195.75	2.232,00	3/8"-1/2"M	10	10	0,93	1,5	65	DN 65	16	55	4/100	22	10,7x21x12,5
DOSAMATIC PPI BIG DN80	106.195.85	2.400,00	3/8"-1/2"M	10	10	0,93	1,5	65	DN 80	16	90	4/100	22	10,7x21x12,5
DOSAMATIC PPI BIG DN100	106.195.95	2.665,00	3/8"-1/2"M	10	10	0,93	1,5	65	DN 100	16	140	4/100	22	10,7x21x12,5

WITH 100 L. TANK AND LEVEL PROBE, WITHOUT WATER METER PO

DOSAMATIC PP/SE	106.191.XS	941,00	3/8"-1/2"M	4	10	0,37	1,5	65	-	-	-	-	16	44X101
DOSAMATIC PP/SE BIG	106.195.XS	1.163,00	3/8"-1/2"M	10	10	0,93	1,5	65	-	-	-	-	22	44X101

WITH 100 L. TANK, LEVEL PROBE AND WATER METER PO

DOSAMATIC PPI/SE ½"	106.191.1S	1.100,00	3/8"-1/2"M	4	10	0,37	1,5	65	½"	16	3	4/1	16	44X101
DOSAMATIC PPI/SE ¾"	106.191.2S	1.124,00	3/8"-1/2"M	4	10	0,37	1,5	65	¾"	16	5	4/1	16	44X101
DOSAMATIC PPI/SE 1"	106.191.3S	1.210,00	3/8"-1/2"M	4	10	0,37	1,5	65	1"	16	7	4/1	16	44X101
DOSAMATIC PPI/SE 1¼"	106.191.4S	1.273,00	3/8"-1/2"M	4	10	0,37	1,5	65	1¼"	16	10	4/1	16	44X101
DOSAMATIC PPI/SE 1½"	106.191.5S	1.492,00	3/8"-1/2"M	4	10	0,37	1,5	65	1½"	16	20	4/1	16	44X101
DOSAMATIC PPI/SE 2"	106.191.6S	1.967,00	3/8"-1/2"M	4	10	0,37	1,5	65	2"	16	30	4/1	16	44X101
DOSAMATIC PPI/SE BIG ½"	106.195.1S	1.322,00	3/8"-1/2"M	10	10	0,93	1,5	65	½"	16	3	4/1	22	44X101
DOSAMATIC PPI/SE BIG ¾"	106.195.2S	1.346,00	3/8"-1/2"M	10	10	0,93	1,5	65	¾"	16	5	4/1	22	44X101
DOSAMATIC PPI/SE BIG 1"	106.195.3S	1.432,00	3/8"-1/2"M	10	10	0,93	1,5	65	1"	16	7	4/1	22	44X101
DOSAMATIC PPI/SE BIG 1¼"	106.195.4S	1.495,00	3/8"-1/2"M	10	10	0,93	1,5	65	1¼"	16	10	4/1	22	44X101
DOSAMATIC PPI/SE BIG 1½"	106.195.5S	1.714,00	3/8"-1/2"M	10	10	0,93	1,5	65	1½"	16	20	4/1	22	44X101
DOSAMATIC PPI/SE BIG 2"	106.195.6S	2.189,00	3/8"-1/2"M	10	10	0,93	1,5	65	2"	16	30	4/1	22	44X101
DOSAMATIC PPI/SE BIG DN65	106.195.7S	2.525,00	3/8"-1/2"M	10	10	0,93	1,5	65	DN 65	16	55	4/100	22	44X101
DOSAMATIC PPI/SE BIG DN80	106.195.8S	2.695,00	3/8"-1/2"M	10	10	0,93	1,5	65	DN 80	16	90	4/100	22	44X101
DOSAMATIC PPI/SE BIG DN100	106.195.9S	2.981,00	3/8"-1/2"M	10	10	0,93	1,5	65	DN 100	16	140	4/100	22	44X101

Additive temperature: 5-50 °C; Ambient temperature: 5-40 °C; Voltage: 230V-50Hz.

Spare parts and accessories for metering pumps

ITEM	ITEM CODE	UNIT PRICE	CONNECT.	RATIO PULSES/LITRES	DESCRIPTION
		€			

WATER METERS WITH PULSE OUTPUT

WATER METER PO 1/2"	106.090.00	149,00	1/2"	4 = 1	Water meter with pulse output - brass body. Accessory suitable for metering pumps: DOSAMATIC PP - DOSAMATIC PP/SE - DOSAMATIC PP BIG - DOSAMATIC PP BIG/SE
WATER METER PO 3/4"	106.090.10	173,00	3/4"	4 = 1	
WATER METER PO 1"	106.090.20	259,00	1"	4 = 1	
WATER METER PO 1" 1/4	106.090.30	322,00	1" 1/4	4 = 1	
WATER METER PO 1" 1/2	106.090.40	541,00	1" 1/2	4 = 1	
WATER METER PO 2"	106.090.50	1.016,00	2"	4 = 1	

FLANGED WATER METERS WITH PULSE OUTPUT

WATER METER PO DN 65	106.090.60	1.352,00	DN65	4 = 100	Flanged water meter with pulse output - brass body. Accessory suitable for metering pumps: DOSAMATIC PP - DOSAMATIC PP/SE - DOSAMATIC PP BIG - DOSAMATIC PP BIG/SE
WATER METER PO DN 80	106.090.75	1.522,00	DN80	4 = 100	
WATER METER PO DN 100	106.090.80	1.808,00	DN100	4 = 100	
WATER METER PO DN 150	106.090.90	2.720,00	DN150	4 = 100	
SIGNAL SPLITTER	106.090.95	33,40	-	-	Allows for the operation of two proportional metering pumps with one single water meter PO.

ITEM	ITEM CODE	UNIT PRICE	TANK CAPACITY	MATERIAL	DIMENSIONS (ØXH)
		€	l		cm
TANK PE 100	455.000.80	199,00	100	PE	44x101
TANK PE 200	455.000.75	326,00	200	PE	60x104
TANK PE 500	455.000.78	540,00	500	PE	76x118,5
FLOW HOSE 4X6 PVDF	455.761.14	8,60	-	-	-
FLOW HOSE 4X6 (EM)	455.761.00	1,12	-	-	-
SUCTION HOSE 4X6	455.761.10	1,00	-	-	-
INJECTION VALVE 4X6 PVDF V	456.350.00	35,20	-	-	-



Sanitization



Anti legionella systems

Dosasan / Dosaclor / Dosaclor Duo / Dosabios / Dosabios Duo

60




UV sterilizers

Gelpur Light

67

Dosasan

Proportional dosing station

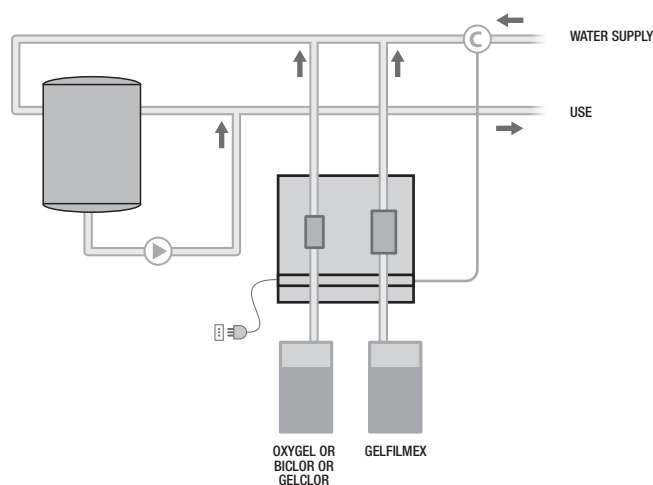

DOSASAN is an anti legionella system for the proportional dosing of a disinfectant (Oxygel or Biclor or Gelclor) and of the anti corrosion product Gelfilmex, in installations with sanitary hot water storage. Suitable to prevent the risk of legionella.

DOSASAN is supplied assembled on a panel, ready for installation, and includes:

- Panel 40 x 60 cm
- Proportional metering pump for dosing anti corrosion conditioning chemicals
- Self degassing proportional metering pump for dosing disinfectants (with high surface tension)
- Signal splitter to control the two metering pumps
- Flow sensor on the disinfecting line
- Suction nozzle with level probe on the disinfecting line
- Level probes
- 25 l. empty can to decant disinfectants
- Kit complete with suction, delivery and drain hoses, injection connections and foot filter.

ITEM	ITEM CODE	UNIT PRICE	INJECTION CONNECTIONS	DOSAGE		PRESSURE	MAX PULSE FREQUENCY	VOLTAGE	DIMENS. (LxH)
				DISINFECTION PROPORTIONAL	ANTI CORROSION PROPORTIONAL				
		€		l/h	l/h	bar		V	cm
DOSASAN	155.014.00	2.438,00	3/8" - 1/2" M	2	4	10	180	230	40x60


P.S. Choose the water meter with pulse output suitable for the application.

Guide to choice of anti legionella systems

SANITARY HOT WATER TANKS	TYPE OF TREATMENT	
	≤ 5000 litres	≥ 5000 litres
prevention and sanitisation	DOSASAN	-
prevention and sanitisation with automatic control and dosing of the disinfectant	DOSAACLOR	DOSAACLOR DUO
	DOSABIOS	DOSABIOS DUO

Dosaclor

Proportional dosing station, with residual chlorine control

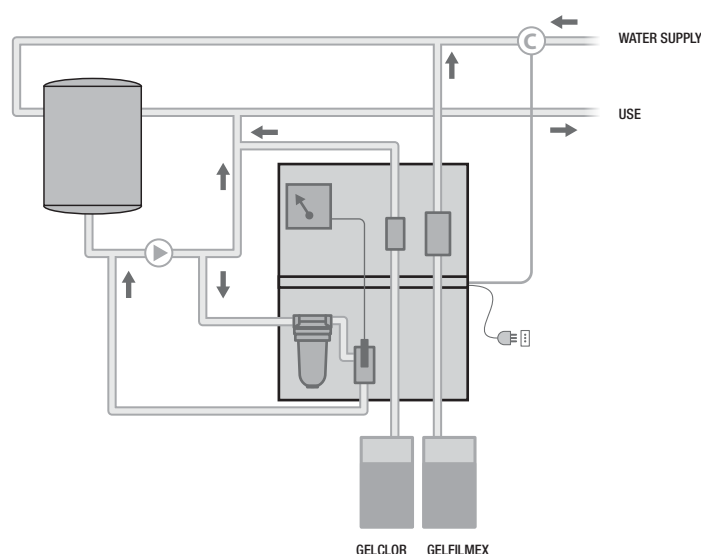

DOSACLOR is an anti legionella system for the control and proportional dosing of Gelclor disinfectant and Gelfilmex anti corrosion product, in installations with sanitary hot water storage. Suitable in presence of legionella to avoid bacterium development and growth.

DOSACLOR is supplied assembled on a panel, ready for installation, and includes:

- Panel 80 x 100 cm
- Proportional metering pump for dosing anti corrosion conditioning chemicals
- Self degassing proportional metering pump for dosing Gelclor (with high surface tension)
- Hot water filter
- Digital instrument for chlorine measurement and regulation
- Amperometric cell and cell holder
- Flow sensor on the disinfecting line
- Suction nozzle with level probe on the disinfecting line
- Level probes
- 25 l. empty can to decant disinfectants
- Kit complete with suction, delivery and drain hoses, injection connections and foot filter

ITEM	ITEM CODE	UNIT PRICE	INJECTION CONNECTIONS	DOSAGE		PRESSURE	METER	MAX PULSE FREQUENCY	VOLTAGE	DIMENS. (LxH)
				DISINFECTION PROPORTIONAL	ANTI CORROSION PROPORTIONAL					
		€		l/h	l/h	bar			V	cm
DOSACLOR	155.013.50	8.079,00	3/8" - 1/2" M	2	4	10	cloro	180	230	80x100


P.S. Choose the water meter with pulse output suitable for the application.

Guide to choice of anti legionella systems

SANITARY HOT WATER TANKS	TYPE OF TREATMENT	
	≤ 5000 litres	≥ 5000 litres
prevention and sanitisation	DOSASAN	-
prevention and sanitisation with automatic control and dosing of the disinfectant	DOSACLOR	DOSACLOR DUO
	DOSABIOS	DOSABIOS DUO

Dosacolor Duo

Proportional dosing station, with residual chlorine control

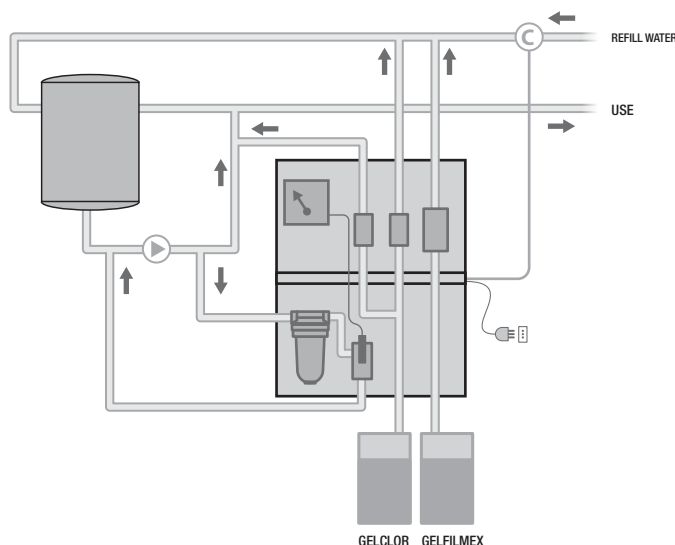

DOSACLOR DUO is an anti legionella system for the control and proportional dosing of Gelclor disinfectant and Gelfilmex anti corrosion product, in installations with sanitary hot water storage. Suitable in presence of legionella to avoid bacterium development and growth.

DOSACLOR DUO is supplied assembled on a panel, ready for installation, and includes:

- Panel 80 x 100 cm
- Proportional metering pump for dosing anti corrosion conditioning chemicals
- Self degassing proportional metering pump for dosing Gelclor (with high surface tension)
- Hot water filter
- Digital instrument for chlorine measurement and regulation
- Amperometric cell and cell holder
- Flow sensor on the disinfecting line
- Suction nozzle with level probe on the disinfecting line
- Level probes
- 25 l. empty can to decant disinfectants
- Kit complete with suction, delivery and drain hoses, injection connections and foot filter
- Signal splitter
- two dosing points of Gelclor, optimising the disinfectant level in the storage tank.

ITEM	ITEM CODE	PRICE	INJECTION CONNECTIONS	DOSAGE			PRESS.	METER	MAX PULSE FREQ.	VOLT.	DIMENS. (LxH)
				1° DISINFECTION INSTRUMENTAL	2° DISINFECTION PROPORTIONAL	ANTI CORROSION PROPORTIONAL					
		€		l/h	l/h	l/h	bar			V	cm
DOSACLOR DUO	155.013.40	9.681,00	3/8" - 1/2"M	2	2	4	10	cloro	180	230	80x100


P.S. Choose the water meter with pulse output suitable for the application.

Guide to choice of anti legionella systems

SANITARY HOT WATER TANKS	TYPE OF TREATMENT	
	≤ 5000 litres	≥ 5000 litres
prevention and sanitisation	DOSASAN	-
prevention and sanitisation with automatic control and dosing of the disinfectant	DOSACLOR	DOSACLOR DUO
	DOSABIOS	DOSABIOS DUO

Dosabios

Proportional dosing station, with chlorine dioxide control

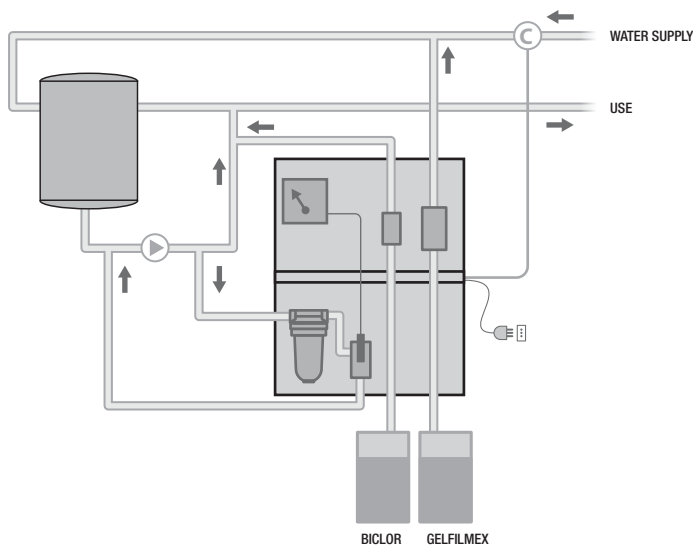

DOSABIOS is an anti legionella system for the control and proportional dosing of Biclor Gel disinfectant and Gelfilmex anti corrosion product, in installations with sanitary hot water storage. Suitable in presence of legionella to avoid bacterium development and growth.

DOSABIOS is supplied assembled on a panel, ready for installation, and includes:

- Panel 80 x 100 cm
- Proportional metering pump for dosing anti corrosion conditioning chemicals
- Self degassing proportional metering pump for dosing Biclor (with high surface tension)
- Hot water filter
- Digital instrument for chlorine dioxide measurement and regulation
- Amperometric cell and cell holder
- Flow sensors on the disinfecting line
- Suction nozzle with level probe on the disinfecting line
- Level probes
- 25 l. empty can to decant disinfectants
- Kit complete with suction, delivery and drain hoses, injection connections and foot filter.

ITEM	ITEM CODE	UNIT PRICE	INJECTION CONNECTIONS	DOSAGE		PRESS.	METER	MAX PULSE FREQ.	VOLTAGE	DIMENS. (LxH) cm
				DISINFECTION INSTRUMENTAL	ANTI CORROSION PROPORTIONAL					
		€		l/h	l/h	bar			V	
DOSABIOS	155.013.80	8.357,00	3/8" - 1/2" M	2	4	10	chlorine dioxide	180	230	80x100


P.S. Choose the water meter with pulse output suitable for the application.

Guide to choice of anti legionella systems

SANITARY HOT WATER TANKS	TYPE OF TREATMENT	
	≤ 5000 litres	≥ 5000 litres
prevention and sanitisation	DOSASAN	-
prevention and sanitisation with automatic control and dosing of the disinfectant	DOSACLOR	DOSACLOR DUO
	DOSABIOS	DOSABIOS DUO

Dosabios Duo

Proportional dosing station, with chlorine dioxide control

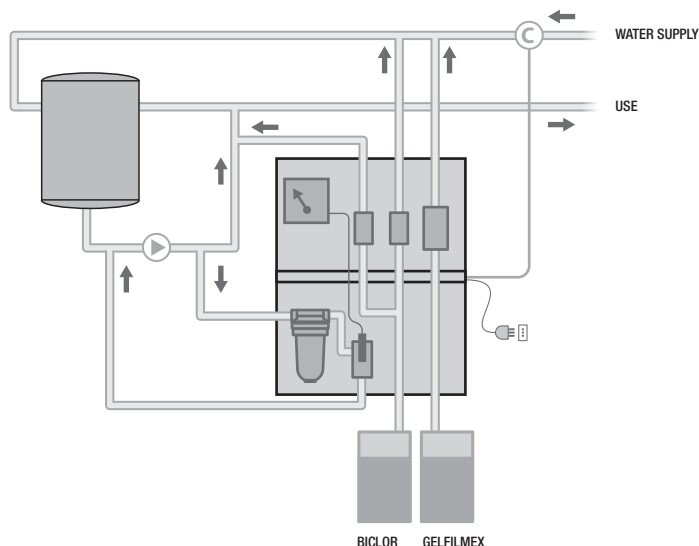

DOSABIOS DUO is an anti legionella system for the control and proportional dosing of Biclór Gel disinfectant and Gelfilmex anti corrosion product, in installations with sanitary hot water storage. Suitable in presence of legionella to avoid bacterium development and growth.

DOSABIOS DUO is supplied assembled on a panel, ready for installation, and includes:

- Panel 80 x 100 cm
- Proportional metering pump for dosing anti corrosion conditioning chemicals
- Self degassing proportional metering pump for dosing Biclór (with high surface tension)
- Hot water filter
- Digital instrument for chlorine dioxide measurement and regulation
- Amperometric cell and cell holder
- Flow sensors on the disinfecting line
- Suction nozzle with level probe on the disinfecting line
- Level probes
- 25 l. empty can to decant disinfectants
- Kit complete with suction, delivery and drain hoses, injection connections and foot filter
- Signal splitter
- Two dosing points of Biclór Gelflór, optimising the disinfectant level in the storage tank.

ITEM	ITEM CODE	UNIT PRICE	INJECTION CONNECTIONS	DOSAGE			PRESS.	METER	MAX PULSE FREQUENCY	VOLT.	DIMENS. (LxH)
				1ª DISINFECTION INSTRUMENTAL	2ª DISINFECTION PROPORTIONAL	ANTI CORROSION PROPORTIONAL					
		€		l/h	l/h	l/h	bar			V	cm
DOSABIOS DUO	155.013.70	9.600,00	3/8" - 1/2"M	2	2	4	10	chlorine dioxide	180	230	80x100

P.S. Choose the water meter with pulse output suitable for the application.

Guide to choice of anti legionella systems

GUIDE TO CHOICE OF ANTI LEGIONELLA SYSTEMS		≤ 5000 litres	≥ 5000 litres
TYPE OF TREATMENT			
prevention and sanitisation		DOSASAN	-
prevention and sanitisation with automatic control and dosing of the disinfectant		DOSAFLOR	DOSAFLOR DUO
		DOSABIOS	DOSABIOS DUO

Biclor

Disinfectant based on chlorine dioxide for Dosasan, Dosabios and Dosabios Duo

Biclor is a disinfectant based on chlorine dioxide. Its two components together form chlorine dioxide, which allows to prevent Legionella bacterium from proliferating inside all water systems, including hot sanitary water production systems. Unlike chlorine, Biclor has a more invasive action towards Biofilm, which is the nourishment for Legionella.



ITEM	ITEM CODE	UNIT PRICE €	PACK pcs.
BICLOR GEL 5	107.035.40	253,00	1
BICLOR GEL 25	107.035.45	628,00	1

Gelclor

Disinfectant based on sodium hypochlorite for Dosasan, Dosacolor and Dosacolor Duo

Ready-to-use liquid product based on sodium hypochlorite for water disinfection in civil and industrial water systems. To be used with proportional metering pumps (Dosamatic PP/PPI Big).



ITEM	ITEM CODE	UNIT PRICE €	CAN Kg	PACK pcs.	SPECIFIC WEIGHT Kg/dm ³	ACTIVE CHLORINE CONCENTRATION %	ACTIVE CHLORINE RESIDUAL CONCENTRATION ppm
GELCLOR	107.035.02	70,40	25	1	1,22	>10	0,2-0,4

Oxygel

Disinfectant based on hydrogen peroxide and silver salts for Dosasan

Oxygel is a disinfectant based on hydrogen peroxide and silver salts. It is used against Legionella, as the combined action between hydrogen peroxide and silver salts has a broad spectrum disinfecting function, thus satisfying the laboratory test prEN 13623 (Chemical disinfectants and antiseptics. Bactericidal activity of product against Legionella spp.).



ITEM	ITEM CODE	UNIT PRICE €	CAN Kg	PACK pcs.
OXIGEL 5	107.035.80	106,00	5	1
OXIGEL 20	107.035.85	348,00	20	1

Gelfilmex

Anti corrosion product for Dosasan, Dosabios, Dosabios Duo, Dosacolor, Dosacolor Duo

Gelfilmex is an anti corrosion liquid to be used in water systems, for potable and general use. Product forms a protective film which prevents direct contact between water and piping metal.



ITEM	ITEM CODE	UNIT PRICE €	CAN Kg	PACK pcs.	SPECIFIC WEIGHT Kg/dm ³	pH
GELFILMEX	107.011.42	103,00	25	1	1,05	≈8,5

Gel Peracetic

Strong sanitizer based on peracetic acid

Concentrated liquid product based on peracetic acid, to remove organic and inorganic deposits in civil and industrial water systems. Specific for disinfecting hot water cisterns and storage tanks. Able to remove scale and deposits of organic nature (biofilm). Suitable for restoring systems with Legionella problems.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	PH
		€	Kg	pcs.	Kg/dm ³		
GELPERACETIC	110.100.60	312,00	25	1	1,15	<2	1l + 15l water

Spare parts and accessories for anti legionella systems

ITEM	ITEM CODE	UNIT PRICE	TANK CAPACITY	MATERIAL	DIMENS. (ØXH)
		€	l		cm
TANK PE 100	455.000.80	199,00	100	PE	44x125
BUND TANK FOR TANK PE 100	455.400.52	226,00	150	PE	51x75
SAFETY BOWL FOR 5, 20, 25 L. CANS	455.400.58	47,90	32	ABS	
OXYGEL TEST KIT	155.015.67	116,00	-	-	-
CHLORINE KIT	471.000.30	42,50	-	-	-
CHLORINE DIOXIDE TEST KIT	471.001.24	48,00	-	-	-

ITEM	ITEM CODE	UNIT PRICE	CONNECT.	RATIO PULSES/LITRES	DESCRIPTION
		€			

WATER METERS WITH PULSE OUTPUT


WATER METER PO 1/2"	106.090.00	149,00	1/2"	4 = 1	Water meter with pulse output - brass body.
WATER METER PO 3/4"	106.090.10	173,00	3/4"	4 = 1	
WATER METER PO 1"	106.090.20	259,00	1"	4 = 1	
WATER METER PO 1" ¼	106.090.30	322,00	1" ¼	4 = 1	
WATER METER PO 1" ½	106.090.40	541,00	1" ½	4 = 1	
WATER METER PO 2"	106.090.50	1.016,00	2"	4 = 1	

FLANGED WATER METERS WITH PULSE OUTPUT

WATER METER PO DN 65	106.090.60	1.352,00	DN65	4 = 100	Flanged water meter with pulse output - brass body.
WATER METER PO DN 80	106.090.75	1.522,00	DN80	4 = 100	
WATER METER PO DN 100	106.090.80	1.808,00	DN100	4 = 100	
WATER METER PO DN 150	106.090.90	2.720,00	DN150	4 = 100	

Gelpur Light

UV sterilizers

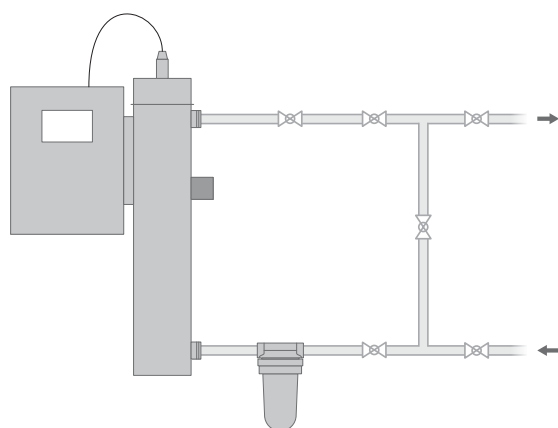

Gelpur Light are UV ray sterilizers for microbiological control in water systems. Such a system guarantees the disinfection against bacteria and viruses in water.

Operation is easy. Water is conveyed into the stainless steel irradiation chamber and flows on the Q-sleeve protecting the UV ray bulb. The UV ray lamps used in Gelpur Light units release an irradiation with a wavelength of 254 nm which makes bacteria inactive. Several models are available depending on the required flow rates, from 19 l/min to 300 l/min. Installation is to be carried out after the water meter. A strong filtration is recommended before the sterilizer in order to remove the solid particles that would affect the sterilizing action.

Gelpur Light units are made up of:

- Control panel
- Hour meter for system lifetime and lamp replacement
- Working led indicators
- Sterilizing chamber in stainless steel AISI 304 (in stainless steel AISI 316 upon request)

Gelpur Light S units guarantee the total sterilization thanks to the UV-C sensor warning whenever irradiation intensity is not sufficient. Preset for block valve.

ITEM	ITEM CODE	UNIT PRICE	CONN.	LAMP	ABSORBED POWER	LAMP LIFE	MAX FLOW RATE	MAX PRESS.	DEGREE OF PROT.	IRRADIATION	IN/OUT INTERAXIS	DIMENS. (LxH)	CONTROL PANEL DIMENS. (LxHxZ)
		€		no.	W/h	hours	l/min	bar	IP	(μWsec/cm ²)	mm	mm	mm

WITHOUT UV SENSOR

GELPUR LIGHT 1/19 LCD	102.332.12	1.043,00	¾"M	1	30	9000	19	9	55	>30000	415	90x530	200x160x95
GELPUR LIGHT 1/45 LCD	102.332.22	1.439,00	1"M	1	40	9000	45	9	55	>30000	816	90x930	200x160x95
GELPUR LIGHT 1/60 LCD	102.332.42	2.162,00	1½"M	1	40	9000	60	9	55	>30000	767	190x950	200x160x95
GELPUR LIGHT 1/85 LCD	102.332.52	2.712,00	1½"M	1	80	9000	85	9	55	>30000	767	190x950	200x160x95
GELPUR LIGHT 2/100 LCD	102.339.05	4.254,00	1½"M	2	85	9000	100	9	55	>30000	767	190x990	240x190x95
GELPUR LIGHT 2/200 LCD	102.335.92	4.837,00	1½"M	2	160	9000	200	9	55	>30000	767	185x985	240x190x90

WITH UV SENSOR

GELPUR LIGHT 1/19 S LCD	102.332.64	1.964,00	¾"M	1	30	9000	19	9	55	>30000	415	90x530	200x160x95
GELPUR LIGHT 1/45 S LCD	102.332.72	2.471,00	1"M	1	40	9000	45	9	55	>30000	816	90x930	200x160x95
GELPUR LIGHT 1/60 S LCD	102.332.47	3.496,00	1½"M	1	40	9000	60	9	55	>30000	767	190x950	200x160x95
GELPUR LIGHT 1/85 S LCD	102.332.57	3.919,00	1½"M	1	80	9000	85	9	55	>30000	767	190x950	200x160x95
GELPUR LIGHT 2/100 S LCD	102.339.10	5.584,00	1½"M	2	85	9000	100	9	55	>30000	767	190x990	240x190x95
GELPUR LIGHT 2/200 S LCD	102.339.12	6.589,00	1½"M	2	160	9000	200	9	55	>30000	767	185x985	240x190x90

Spare parts and accessories for UV sterilizers

ITEM	ITEM CODE	UNIT PRICE	IN/OUT CONNECTIONS	VOLTAGE	DESCRIPTION
		€		V	
EV BLOCK NC 3/4"	102.319.00	47,70	¾"	24	Block valve suitable for GELPUR LIGHT 1/19 S
EV BLOCK NC 1"	102.319.05	51,80	1"	24	Block valve suitable for GELPUR LIGHT 1/45 S
EV BLOCK NC 1" 1/2	102.319.10	112,00	1½"	24	Block valve suitable for GELPUR LIGHT 1/60 S - 1/85 S - 2/100 S - 3/130 S
EV BLOCK NC 2"	102.319.12	163,00	2"	24	Block valve suitable for GELPUR LIGHT 4/230 S - 5/330 S
TRANSFORMER 230/24 V	102.319.20	83,60		24	For GELPUR LIGHT
UV LAMP 1/45-1/45S-2/75-2/100S	452.366.15	166,00			



Reverse Osmosis



Undercounter water purifiers

Acquaclick / Gelpur Easy Carbon / Gelpur SL 250

70



RO systems

Gelpur OS

74

AcquaClick

Undercounter reverse osmosis water purifier.
The only one with remote control. No need of extra tap



Patented reverse osmosis system with direct production, able to improve tap water quality and make it excellent for drinking and cooking. It is possible to choose extra light, light or medium water.

The remote control allows to have purified water directly from the existing tap (no need to install another faucet or three way tap).

A warning light on the remote control signals when it is time to replace filter and membranes:

- Every year for carbon filter with No Drop system.
- Every 3/5 years (depending on water quality) for membranes with *No Drop system*.

The *No Drop system* allows to replace cartridges without closing the water stop valve and without drippings.

Installation under the sink in a few minutes.

ITEM	ITEM CODE	UNIT PRICE	PRESSURE	WATER PRODUCTION*	MAX CONDUCTIVITY IN	POWER SUPPLY	ABSORPTION		DIMENS. (LxHxZ)
							PRODUCTION	STAND-BY	
		€	bar	l/min	µS/cm	V	W	W	cm
ACQUAClick	102.314.40	1.781,00	1÷5	1,2/2	1500	220 V - 50÷60 Hz	72	<1	16x44x37,5

* depending on mains pressure

Gelpur Easy Carbon

Cartridge water purifier



Domestic water purifiers (one, two and three stage). Remove solid particles, bad smells and tastes, thus improving water quality and making it excellent for drinking and cooking.

Gelpur Easy Carbon Basic. Silver-added activated carbon purifier, with bacteriostatic action.

Gelpur Easy Carbon Plus. Silver-added activated carbon purifier fitted with 5µ prefiltration, with bacteriostatic action.

Gelpur Easy Carbon Ultra. Silver-added activated carbon purifier fitted with 5µ prefiltration and ultrafiltration.

Each kit includes:


- Water sampling valve
- Head with quick fit connection with built-in check valve
- Disposable filter cartridges
- Countertop faucet

ITEM	ITEM CODE	UNIT PRICE	OPERATING FLOW RATE	OPERATING PRESSURE	MAX LIFETIME *	MIN/MAX WATER TEMP.	ROOM TEMP. MIN/MAX	HOSES IN/OUT	DIMENS. (LxHxZ)
		€	l/min	bar	l	°C	°C	inches	cm
GELPUR EASY CARBON BASIC KIT	101.073.60	208,00	1	8,6	10000	5-38	5-50	3/8"	11,5x31x7,5
GELPUR EASY CARBON PLUS KIT	101.073.70	240,00	1	8,6	10000	5-38	5-50	3/8"	19,5x31x7,5
GELPUR EASY CARBON ULTRA KIT	101.073.80	291,00	1	8,6	10000	5-38	5-50	3/8"	27x31x7,5

* Lifetime depends on the inlet water quality. Replace cartridge when level is low and, however, within one year from the installation.

Gelpur SL 250

Water purifiers with storage for single point of use



Through a reverse osmosis membrane combined with a pre-filtration and a UV sterilizing system, Gelpur SL 250 units guarantee a reserve of pure water (5,5 l) without chemical and bacteriological pollutants, bad smells and excellent for drinking and cooking. The units are equipped with:

- Pressurization system with silent pump
- UV lamp
- Mixing valve
- Supplementary dispensing faucet

They are to be installed under the sink and are suitable for the three way tap.

ITEM	ITEM CODE	UNIT PRICE	WATER PRODUCT.	MAX CONDUCTIVITY IN	TOTAL HARDNESS IN	STORAGE TANK	UV LAMP	LAMP LIFE	POWER SUPPLY	DIMENSIONS (LxHxZ)	TANK DIMENSIONS (ØxH)
		€	l/day	µS/cm	°f	l	W	h	V	cm	cm
GELPUR SL 250	102.308.20	1.439,00	250	1500	<25	5,5	6	6000	220/12-24	37x50x19,5	23x34

Consumables for water purifiers



Membrane RO 75 GPD



Odour remover Filter



UV lamp



Carbon filter

ITEM	ITEM CODE	UNIT PRICE	PACK.	DEGREE OF PROTECTION	MATERIAL	DESCRIPTION	SUITABLE FOR
		€	pcs.	µm			
SILVER CARBON FILTER CARTRIDGE	450.857.06	51,70	1	-	-	Active carbon added with silver	Gelpur Easy Carbon Basic, Plus e Ultra
5µm CARTRIDGE	450.857.07	67,30	1	5	PP	Cartridge with 5 µm degree of filtration	Gelpur Easy Carbon Plus and Ultra
UF MEMBRANE CARTRIDGE	450.857.08	83,60	1	-	-	Ultra filtration membrane	Gelpur Easy Carbon Ultra
NO-DROP CARBON FILTER	102.000.30	98,40	1	5		10" "No Drop" activated carbon filter *	AcquaClick
NO-DROP FULL KIT	102.000.40	447,00	1	-		n. 3 "No Drop" osmosis membranes * + n. 1 "No Drop" activated carbon filter *	AcquaClick
MICROFIBER PP 10" 1µ	450.858.10	5,90	1	1	PP	10" Filter for outlet filtration	Gelpur SL 250
MICROFIBER PP 10" 5µ	450.858.15	5,00	1	5	PP	10" Filter for inlet filtration	Gelpur SL 250
CARBON FILTER 10"	450.860.90	16,60	1	-		10" Activated carbon filter	Gelpur SL 250
RO MEMBRANE 75 GPD	453.122.30	95,90	1	-	-	Reverse osmosis membrane	Gelpur SL 250
ODOUR REMOVER FILTER	450.860.80	12,80	1	-	-	Odour remover filter	Gelpur SL 250
UV LAMP 1 GPM	452.930.25	56,10	1	-	-	Bacteriostatic lamp	Gelpur SL 250


* The "No Drop" system is a GEL patent and allows to replace cartridges in just a couple of minutes without wetting or disassembling the unit.

Spare parts and accessories for water purifiers

ITEM	ITEM CODE	UNIT PRICE	PACK.	DESCRIPTION
		€	pcs.	
DIGI FLOW	102.307.70	121,00	1	Programmable litre counter for filters replacement
CONDUCTIVITY TESTER	155.010.05	357,00	1	from 0 to 1999 µS/cm
THREE WAY TAP	102.307.80	376,00	1	
WRENCH PL	125.210.30	3,60	1	


Gelpur OS

Reverse osmosis systems for small civil and industrial uses

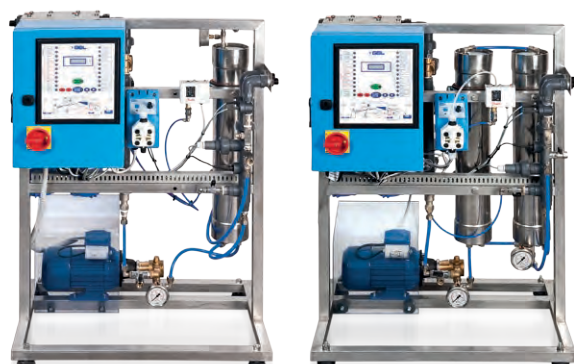

2400 P

4800P

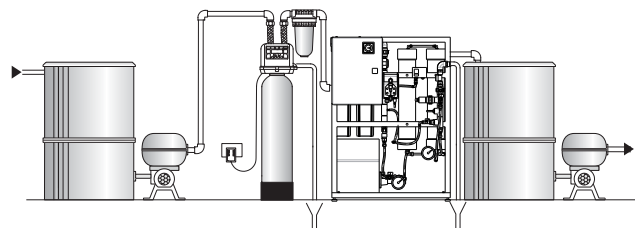

The system is controlled by a microprocessor control panel which allows to easily manage operation and service stages. Gelpur OS systems are supplied already assembled on a monobloc unit and tested. They are equipped with:

- Microfiltration
- Activated carbon filtration
- Reverse osmosis filtration
- Stainless steel skid
- Inlet solenoid valve
- Low pressure switch
- Vane volumetric pressurization pump
- Metering pump with level probe for anti scale chemical
- Pressure and flow rate regulating valves
- High permeation surface membranes
- Mixing circuit
- Vessels in PRFV/Aisi 316 L
- Control panel with digital control
- Digital transmitters for permeate and concentrate flow rates
- Microprocessor conductivity meter for permeate and raw water
- Temperature probe for permeate and raw water
- Hour meter
- Totalizator for produced m3

Gelpur OS 4800 P differs from 2400 P for a further reverse osmosis membrane.

ITEM	ITEM CODE	UNIT PRICE	OPERATING FLOW RATE	OPERATING PRESSURE	DAILY PRODUCTION	RO MEMBR.	MAX SALINITY IN	INSTALLED POWER	POWER SUPPLY	DIMENS. (LxHxZ)
		€	l/h	bar	l	no.	µS/cm	kW	V	cm
GELPUR OS 2400 P	102.309.40	8.062,00	100	12	2400	1	1500	0,37	230V 50 Hz	55x95x73
GELPUR OS 4800 P	102.309.45	9.450,00	200	12	4800	2	1500	0,37	230V 50 Hz	55x95x73

Gel Antiscalant RO1

Sequestering and dispersing liquid for Gelpur OS

Sequestering and dispersing liquid product for waters supplying reverse osmosis systems. To be used with Dosamatic metering pumps.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DOSAGE
		€	Kg	pcs.	
GEL ANTISCALANT RO1	133.030.00	211,00	25	1	4-20 ppm

Gel Antiscalant RO2

Sequestering and dispersing liquid for Gelpur OS. Specific for waters with Iron and Silica.

Sequestering and dispersing liquid product for waters containing Iron and Silica which supply reverse osmosis systems. To be used with Dosamatic metering pumps.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DOSAGE
		€	Kg	pcs.	
GEL ANTISCALANT RO2	133.030.10	247,00	25	1	4-20 ppm

Gel Washing Basic

Basic solution for Gelpur OS

Basic solution to remove organic deposits from RO membranes.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DOSAGE
		€	l	pcs.	
GEL WASHING BASIC	109.080.60	29,30	1	6	1 litre per 100 litres of water

Gel Washing Acid

Acidic solution for Gelpur OS

Acidic solution to remove inorganic deposits from RO membranes and from ion exchange resins in water softeners.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DOSAGE
		€	l	pcs.	
GEL WASHING ACID	109.080.50	50,00	5	1	5 litres per 100 litres of water

Saver Liquid

Concentrated preservative liquid for RO membranes

Concentrated preservative liquid preventing RO membranes from deterioration. Limits formation of moulds and bacteria. Recommended for use on membranes which have not been operating for more than seven days. It is recommended to remove product after 20 days.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€	Kg	pcs.
SAVER LIQUID	107.036.20	192,00	10	1

Spare parts and accessories for Gelpur OS

ITEM	ITEM CODE	UNIT PRICE	DESCRIPTION
		€	
SENTINEL SYSTEM - GSM	109.081.00	1.803,00	GSM module for remote control
PP 20" CARTRIDGES 5µm	450.858.60	12,20	
20" EXTRUDED CARBON FILTER	450.858.75	18,20	



Power flushing



Power flushing pumps

Superflush 40 / Superflush 30 / Boy Jet 4 Solar

78



Flushing chemicals


Long Life 300 / Long Life 400 / Long Life 410 /
Long Life 800 / Long Life 200 Solar

79

Superflush 40

2 in 1 pump for high circulation power flushing of heating systems and descaling of heat exchangers. Wheeled

High circulation pump for descaling, cleaning and power flushing traditional and underfloor heating systems. Ergonomic and easy to handle, **Superflush 40 is now equipped with a new carter to protect valves.** Fitted with flow reverser. SF40 HOSES KIT included in the supply.

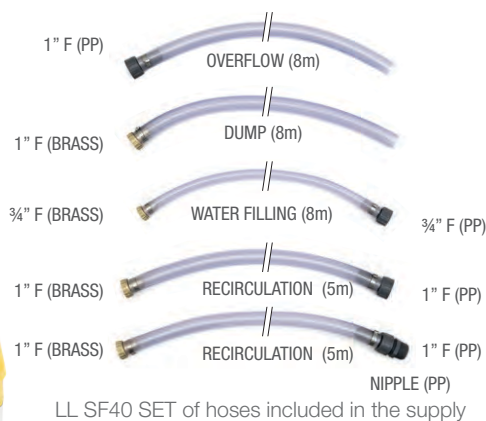

ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROTECTION*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESSURE	WEIGHT	DIMENS. (LxHxZ)
		€	V/HP	IP	l/min		l	bar	kg	cm
LONG LIFE SUPER FLUSH 40	121.094.30	1.861,00	230/0,75	54	102	1" F	40	1,8	19	40x95x70

* Referred to the motor

Superflush 30

2 in 1 pump for high circulation power flushing of heating systems and descaling of heat exchangers.

Pump for descaling, cleaning and power flushing small traditional and underfloor heating systems. Fitted with flow reverser.



ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROTECTION*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESSURE	WEIGHT	DIMENS. (ØxHxZ)
		€	V/HP	IP	l/min		l	bar	kg	cm
LONG LIFE SUPER FLUSH 30	121.070.62	1.183,00	230/0,45	54	39	½" F	24	1,5	11	43x63

* Referred to the motor

Boy Jet 4 Solar

Centrifugal pump for washing and filling solar systems. Wheeled

Centrifugal pump for filling solar heating systems. Tested up to 3 bar. **The bigger wheels and the new shape of the handle make use and transport easy and pump more resistant.**



ITEM	ITEM CODE	UNIT PRICE	SINGLE PHASE MOTOR	TANK CAPACITY	PRESSURE	WEIGHT	DIMENSIONS (LxHxZ)
		€	HP	l	bar	kg	cm
BOY JET 4 SOLAR	127.070.00	958,00	0,5	20	0-4	17	25x37x60

If you are looking for a pump only for descaling, go to **page. 94/95**

Spare parts and accessories for power flushing and descaling pumps

ITEM	ITEM CODE	UNIT PRICE	DESCRIPTION
		€	
SET OF HOSES LL SF40	600.060.90	184,00	1 x 8 m. rubber hose for OVERFLOW with PP 1" F connection 1 x 8 m. rubber hose for FILLING with BRASS 3/4" F connection 1 x 8 m. rubber hose for DUMP with BRASS 1" F connection 2 X 5 m. rubber hose for RECIRCULATION with BRASS 1" F and PP 1" F connection 1 x 1" NIPPLE
SET OF HOSES LL SF30	600.060.85	82,70	1 x 8 m. rubber hose for OVERFLOW with PP 3/4" F connection 1 x 8 m. rubber hose for FILLING with BRASS 3/4" F connection 1 X 8 m. rubber hose for DUMP with BRASS 3/4" F and PP 3/4" F connection
TRANSPARENT HOSE	600.330.10	18,60	mt 2 x 2 + FITTING 1/2
PP BOLT 10 MA	472.005.40	0,24	

Long Life 300

Cleaner for new heating systems

Cleaning and cleansing product with neutral pH, with cleaning and passivating action. Removes working and welding residues, greases and oils which can be present in new heating systems and systems up to six months old. **Suitable for all metals of the system, including aluminium.** Dose 1 litre of product per 100 litres of system water (1 l. can for systems up to 8/10 radiators). **An overdosage does not cause any problems to the system.** Circulate up to 24 hours via the boiler circulator, then rinse thoroughly.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE 300	113.362.21	35,20	1	6	1,04	≈7	<-1	1
LONG LIFE 300	113.362.25	166,00	5	1	1,04	≈7	<-1	1

Long Life 400 / 400 POCKET

Restorer for fouled underfloor heating systems

Non acid restoring product to remove sludge, corrosion debris and deposits built over time in heating systems. Recommended for underfloor heating systems. **Suitable for all metals, including aluminium.**

- Long Life 400. Dose 1 litre of product per 100 litres of system water (1 l. can for systems up to 8/10 radiators).
- Long Life 400 POCKET. Dilute 100 grams of product in 1 litre of water, better if demineralised or RO water. The amount is sufficient for 100 litres of water in the system (a 100 g sachet for systems up to 8/10 radiators).

An overdosage does not cause any problems to the system. Circulate up to 1 week via the boiler circulator. To speed up restoring, use LL Superflush power flushing pumps. Once power flushing has been completed, rinse thoroughly.



ITEM	ITEM CODE	UNIT PRICE	CAN	SACHET	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	g	pcs.	g/cm ³		°C	%
LONG LIFE 400	113.363.11	35,20	1	-	6	1,04	≈7	<-1	1
LONG LIFE 400	113.363.21	606,00	20	-	1	1,04	≈7	<-1	1
LONG LIFE 400 POCKET	113.463.30	35,20	-	100	5	-	-	-	0,1

Long Life 410 / 410 POCKET

Restorer for fouled radiator heating systems

Restoring product to remove iron deposits and corrosion debris built over time in heating systems. To be used with system operating to restore heat exchanger and circulator. **Suitable for all metals, including aluminium.**

- Long Life 410. Dose 1 litre of product per 100 litres of system water (1 l. can for systems up to 8/10 radiators).
- Long Life 410 POCKET. Dilute 100 grams of product in 1 litre of water, better if demineralised or RO water. The amount is sufficient for 100 litres of water in the system (a 100 g sachet for systems up to 8/10 radiators).

An overdosage does not cause any problems to the system. Circulate up to 24 hours via the boiler circulator. Once power flushing has been completed, rinse thoroughly.



ITEM	ITEM CODE	UNIT PRICE	CAN	SACHET	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	g	pcs.	g/cm ³		°C	%
LONG LIFE 410	113.266.11	27,00	1	-	6	1,08	≈5	<-1	1
LONG LIFE 410	113.266.31	119,00	5	-	1	1,08	≈5	<-1	1
LONG LIFE 410	113.266.21	488,00	20	-	1	1,08	≈5	<-1	1
LONG LIFE 410 POCKET	113.166.40	27,00	-	100	5	-	-	-	0,1

Long Life 800

Restorer for badly fouled radiator heating systems

Product with strong dispersing and cleaning action to remove high amounts of metal oxides and scale deposits built over time in heating systems. **Suitable for all metals of the system, including aluminium.** Dose 1 litre of product per 100 litres of system water (1 l. can for systems up to 8/10 radiators). **An overdosage does not cause any problems to the system.** To be used with high circulation power flushing pump LL Superflush.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE 800	113.365.61	43,30	1	6	1,09	≈6,5	<-1	1
LONG LIFE 800	113.365.71	196,00	5	1	1,09	≈6,5	<-1	1

SOLAR HEATING SYSTEMS

Long Life 200 Solar

Cleaner for solar systems

Ready-for-use product with dispersing and cleaning action to remove sludge and deposits caused by the normal degradation of thermal fluids in solar heating circuits. **Suitable for all materials generally present in systems.**



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE 200 SOLAR	113.358.20	61,40	10	1	1,03	≈12,5	<-3	100
LONG LIFE 200 SOLAR	113.358.95	116,00	20	1	1,03	≈12,5	<-3	100



Chemical conditioning



Filling units

MiniMag / Nembo KIT / Wheely Soft / Wheely Pure / Boy Jet 4 Solar / Air Force 1 / Air Force 3 / KIT LL Mag Filter / Termo Tank / Termo Tank Filter

84



Conditioning chemicals

Long Life 100 / Poly AP / Long Life 100 COMBI / Long Life 200 / Long Life 710 / Long Life Sealer / Long Life 500 / Gel Termol ECO / Gel Termol AT / Gel Termol AT-20 / Gel Termol GV / Gel Termol GV-20 / Long Life 100 Solar / Gelphos L / Gelphos L 15 / Biclor / Gelclor / Oxygel / Gel Peracetic / Gelfilmex / Gelcid / Poly Ice / Polyvapour

86





MiniMag

Boiler magnetic filter to protect systems +
LL100 protective chemical

3 ANNI
DI GARANZIA



IL PIÙ EFFICACE +30%
con la forza di
14.600 GAUSS



MiniMag is a compact magnetic filter. To prevent sludge and iron deposits from clogging the boiler exchanger, the magnetic filter must be installed on the return pipe of the heating system following the direction shown by the arrows. Thanks to the adjustable connections the filter can be installed on vertical and horizontal pipes. The valve allows draining and filling chemicals. The easily removable magnet and the wide drain allow a fast and effective servicing.

30% more performing than existing magnetic filters

MiniMag can also be easily
used to fill conditioning
chemicals into heating systems



MiniMag Pallbox
for 20 packs



MiniMag pack includes one 1 l. can of Long Life 100.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MAX FLOW RATE ($\Delta P=0,01$ bar)	MAX OPERATING PRESSURE	OPERATING TEMP.	MAGNETIC INDUCTION	COMPATIBLE FLUIDS	DIMENSIONS (HxLxP) (interaxis)
		€	pcs.	F	l/min	bar	°C	Gauss		cm cm
MINI MAG	101.299.00	79,60	3	3/4"	6,5	3	0-90	14.600/4200	water Water + glycol	7,1x13x7,7 77 passing 30.5 to the wall

Nembo KIT

Complete kit to protect condensing boilers



NEMBO Kit Z

THE KIT TO PROTECT BOILERS WITH
ZEROCAL+ DOSING UNIT WITH LIQUID REFILL



NEMBO Kit D

THE KIT TO PROTECT BOILERS WITH
ZEROCAL+ DOSING UNIT WITH POWDERED REFILL



1 CLEAR ACID NEUTRALIZER
NEUTRALIZING FILTER
FOR ACIDIC CONDENSATES
GO TO PAGE 27

2 ZEROCAL+ MINI
DOSING UNIT WITH LIQUID REFILL
GO TO PAGE 46

3 MINIMAG
MAGNETIC FILTER
GO TO PAGE 82

4 LONG LIFE 100
CORROSION INHIBITOR
GO TO PAGE 86



1 CLEAR ACID NEUTRALIZER
NEUTRALIZING FILTER
FOR ACIDIC CONDENSATES
GO TO PAGE 27

2 DOSAPHOS MONOCORPO
ANTI SCALE PROPORTIONAL DOSING UNIT
WITH POWDERED REFILL

3 MINIMAG
MAGNETIC FILTER
GO TO PAGE 82

4 LONG LIFE 100
CORROSION INHIBITOR
FOR HEATING SYSTEMS
GO TO PAGE 86

NemboKit Pallbox for 10 packs

Nembo Kit is the 4 in 1 kit ideal for protecting sanitary heating systems against scale and corrosion. The combined action of the magnetic filter with the corrosion inhibitor protects systems, thus keeping them efficient without waste of fuel and maintenance costs.

ITEM	ITEM CODE	UNIT PRICE	PACK.	CONTENTS
		€	Pcs.	
NEMBO KIT Z	101.299.90	189,00	3	Nembo KIT Z includes: 1 Clear Acid Neutralizer + 1 ZeroCal+ Mini with 500ml ZeroCal+ Dose + 1 MiniMag + 1l LongLife 100
NEMBO KIT D	101.299.80	136,00	3	Nembo KIT DZ includes: 1 Clear Acid Neutralizer + 1 Single Body Dosaphos + 1 MiniMag + 1l LongLife 100

Wheely Soft

Mobile water softener for filling heating systems.
Wheeled

Water softener to fill traditional and underfloor heating systems, new or power flushed. Ergonomic and easy to handle. Volumetric with battery. After use, regenerate with the saturated Gel Brine solution.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	RESINS	CYCLIC CAPACITY	CONNECT.	OPERATION FLOW RATE (H.L. < 0,5)	WEIGHT	DIMENSIONS (LxHxZ)
		€	Kg	pcs.	l	m³ x °f		m³/h	kg	cm
WHEELY SOFT	109.745.90	1.479,00	-	1	8	48	3/4" M	0,3	16	40x95x70
GEL BRINE	111.090.75	26,30	10	1						

Wheely Pure

Mobile reverse osmosis unit for solar systems.
Wheeled

Reverse osmosis system for the treatment of spring, well, municipal water. GEL WHEELY PURE is fitted with wheels, so easy to handle and designed for: washing solar panels, filling heating systems, washing without leaving rings. The unit is made up of the following treatment stages: Prefiltration 60 µm, Microfiltration 5 µm, Reverse osmosis



ITEM	ITEM CODE	UNIT PRICE	POWER SUPPLY	INSTALLED POWER	PERMEATE FLOW RATE	RAW WATER FLOW RATE	CONCENTRATE FLOW RATE	OPERATING PRESSURE	WEIGHT	DIMENSIONS (LxHxZ)
		€	V/Hz	kW	m³/h	m³/h	m³/h	bar	kg	cm
GEL WHEELY PURE	102.316.75	5.682,00	220/50	0,55	0,3	0,5	0,2	10÷12	60	55x126x80

Boy Jet 4 Solar

Centrifugal pump for washing and filling solar systems.
Wheeled

Centrifugal pump for filling solar heating systems. Tested up to 3 bar. **The bigger wheels and the new shape of the handle make use and transport easy and pump more resistant.**



ITEM	ITEM CODE	UNIT PRICE	SINGLE PHASE MOTOR	TANK CAPACITY	PRESSURE	WEIGHT	DIMENSIONS (LxHxZ)
		€	Hp	l	bar	kg	cm
BOY JET 4 SOLAR	127.070.00	958,00	0,5	20	0-4	17	25x37x60

Air Force 1

Pressure pump to fill heating systems and clean combustion chambers of condensing boilers

Pressure pump to fill conditioning chemicals into heating systems and clean combustion chambers of condensing boilers. To be used with Boiler Cleaner Economix and Long Life 100. Supplied with Connection kit for MiniMag filter.



ITEM	ITEM CODE	UNIT PRICE	MAX PRESSURE WITH TANK FULL	MATERIAL	TANK CAPACITY
		€	bar		l
AIR FORCE 1	106.051.00	41,00	2	PP	1

Air Force 3

Manual filling pump

Pump to manually fill conditioning chemicals, such as anti scale, anti corrosion, flushing, protective and antifreeze chemicals into traditional or underfloor heating systems. Supplied with connections and adaptors.



ITEM	ITEM CODE	UNIT PRICE	TANK CAPACITY	PRESSURE	WEIGHT	DIMENS. (ØxZ)
		€	l	bar	kg	cm
AIR FORCE 3	106.050.80	97,90	3	3,0	2	15x37

LL Mag Filter KITS

Kits for cleaning, protection and maintenance of heating systems

LL Mag Filter KIT is a kit specially designed for cleaning, protection and maintenance of heating systems. To prevent sludge and iron deposits from clogging the boiler exchanger, the magnetic filter shall be installed on the return pipe of the heating system, by following the direction of the arrows. Thanks to the adjustable connections filter can be installed either on vertical or horizontal pipes. The opening plug allows to dose chemicals (up to 500 ml). The easily removable magnet and the wide drain allow a fast and effective maintenance.

LL Mag Filter & 100 Combi Kit is made up of: multifunction magnetic filter and 1 l. can of LL 100 Combi multifunction protective-restorer

LL Mag Filter Kit is made up of: multifunction magnetic filter, 1 l. can of LL 410 restorer and 1 l. can of LL 100 protective chemical.

LL MAG FILTER & 100 COMBI KIT



LL MAG FILTER KIT



ITEM	ITEM CODE	UNIT PRICE	PACK.	CONN.	MAX FLOW RATE (ΔP=0,01 bar)	MAX OPERATING PRESSURE	OPERATING TEMPERATURE	MAGNETIC INDUCTION	COMPATIBLE FLUIDS	DIMENSIONS (HxLxP) (interaxis)
		€	pcs.	F	l/min	bar	°C	Gauss		cm cm
LL MAG FILTER & 100 COMBI	101.298.80	222,00	1	3/4"	18	3	0-90	11.000	water water + glycol	26,2x9,05x12 22
LL MAG FILTER	101.298.00	218,00	1	3/4"	18	3	0-90	11.000	water water + glycol	26,2x9,05x12 22

Termo Tank

Filling unit for conditioning chemicals

System for filling conditioning chemicals into traditional and underfloor heating systems. Can be installed in line or bypass.



ITEM	ITEM CODE	UNIT PRICE	CONNECT.	TANK CAPACITY	PRESSURE	WEIGHT	DIMENS. (ØxH)
		€		l	bar	kg	cm
TERMO TANK	125.130.00	272,00	3/4"-3/4" F	1,2	8	3	15x27x13

Termo Tank Filter

Multimedia sand filters for heating and cooling closed systems

Termo Tank filter is a clarifying and sludge removing filter for hot water heating systems and can also be used for filling conditioning chemicals. Termo Tank filter can also be backwashed. Termo Tank filter removes all impurities in heating systems, thus preventing them from settling inside boilers, radiators and/or heat exchangers. To be installed in shunt on the return pipe of the system. The above mentioned equipment is manufactured with top quality materials, certified for food use.



ITEM	ITEM CODE	UNIT PRICE	IN/OUT CONN.	OPERATION FLOW RATE	MAX OPERATING PRESSURE	BACKWASH FLOW RATE	MIN. BACKWASH PRESSURE	DIMENS.
		€		m³/h	bar	m³/h	bar	cm (HxØ)
TERMO TANK 12	101.093.10	457,00	3/4" F	0,35	4	1,0	2	99x26
TERMO TANK 25	101.093.15	572,00	3/4" F	0,50	4	1,5	2	102x26
TERMO TANK 50	101.093.20	710,00	3/4" F	1	4	3,0	2	125x34

Use: tec/pot; Water temperature: 5-40 °C; Ambient temperature: 5-50 °C

Consumables for Thermo Tank Filter

ITEM	ITEM CODE	UNIT PRICE	PACK.	
		€/kg.	pcs.	Kg
QUARTZITE 3 - 5 mm	410.700.30	0,60	1	25
QUARTZITE 5 - 8 mm	410.700.25	0,70	1	25

Guide to choice of Long Life chemicals

TYPE OF SYSTEM	LOW TEMPERATURE		HIGH TEMPERATURE	
	CLEANING	CONDITIONING	CLEANING	CONDITIONING
NEW	LL 300	LL 100 + LL 710	LL 300	LL 100
FOULED	LL 400 + LL 710	LL 100 + LL 710	LL 410	LL 100
BADLY FOULED	LL 410 + LL 710	LL 100 + LL 710	LL 800	LL 100

HEATING SYSTEMS

Long Life 100 / 100 POCKET

Non acidic anti corrosion liquid based on molybdate for winter and summer conditioning systems.

Limits formation of gas in circuits

Non acid product to control corrosion and scale in boilers and heating systems. Reduces gas formation in the circuit. Suitable for all metals, including aluminium.

- Long Life 100. Dose 1 litre of product per 100 litres of system water (1 l. can for systems up to 8/10 radiators).
- Long Life 100 POCKET. Dilute 100 grams of product in 1 litre of water, better if demineralised or RO water. The amount is sufficient for 100 litres of water in the system (one 100 g sachet for systems up to 8/10 radiators).

An overdosage does not cause any problems to the system. Check concentration with the GEL Inhibitor Test Kit.



ITEM	ITEM CODE	UNIT PRICE	CAN	SACHET	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	g	pcs.	g/cm³		°C	%
LONG LIFE 100	113.360.11	35,20	1	-	6	1,08	≈ 6,5	<-1	1
LONG LIFE 100	113.360.21	599,00	20	-	1	1,08	≈ 6,5	<-1	1
LONG LIFE 100 POCKET	113.160.30	35,20	-	100	5	-	-	-	0,1

Poly AP

Anti corrosion liquid based on polyamines for heating systems

Liquid product based on filming aliphatic polyamines with anti scale anti corrosion action for heating circuits containing steel, cast iron, copper, aluminium. To be dosed directly or using proportional metering pumps. Initial dosage: 0,5%.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT (at 20°C)	FREEZING POINT	pH	MAINTENANCE DOSAGE
		€	kg	pcs.	kg/dm³	°C		ppm
POLY AP	107.028.20	346,00	20	1	1,22	0	8,8	20-40

Long Life 100 COMBI

2 in 1 liquid for cleaning and protection of heating systems. To be used with LL Mag Filter

Multifunction product with dispersing, restoring and protective action. Specific for removing sludge, corrosion debris and deposits built in heating systems as well as for controlling corrosion and scale. **Suitable for all metals, including aluminium.** Dose 1 litre of product per 100 litres of system water (1 l. can for systems up to 8/10 radiators). **An overdosage does not cause any problems to the system.** It is recommended to use Long Life 100 COMBI with LL Mag Filter for best results in restoring and protection of the system, without draining and/or rinsing.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE 100 COMBI	113.168.11	36,00	1	6	1,17	≈7,5	<-1	1
LONG LIFE 100 COMBI	113.168.10	633,00	20	1	1,17	≈7,5	<-1	1

Long Life 200

Non acidic noise reducer for boilers and heating systems

Non acid product to eliminate problems due to scale in boilers and heating systems. **Suitable for all metals of the system, including aluminium.** Dose 1 litre of product per 100 litres of system water (1 l. can for systems up to 8/10 radiators). **An overdosage does not cause any problems to the system.**



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE 200	113.361.11	35,20	1	6	1,07	≈6,5	<-1	1

Long Life 710 / 710 POCKET

Biocide-sanitizer for underfloor heating systems

Non oxidizing product to remove bacteria in underfloor heating systems. **Suitable for all metals, including aluminium.**

- Long Life 710. For fouled systems, dose half a litre of product per 100 litres of system water and circulate up to 24 hours via the boiler circulator. After the treatment drain the system and recondition with LL100 and LL710. For new or treated systems, dose half a litre of product and leave it inside the system.
- Long Life 710 POCKET. Dilute 100 grams of product in 1 litre of water, better if demineralised or RO water. The amount is sufficient for 100 litres of water in the system.

For fouled systems circulate up to 24 hours via the boiler circulator. After the treatment drain the system and recondition with LL100 POCKET and LL710 POCKET. For new or treated systems, leave the product inside the system.

An overdosage does not cause any problems to the system. To speed up washing, use LL Superflush power flushing pumps.



ITEM	ITEM CODE	UNIT PRICE	CAN	SACHET	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	g	pcs.	g/cm ³		°C	%
LONG LIFE 710	113.267.11	38,50	1	-	6	1,1	≈8,3	<-5	0,5
LONG LIFE 710	113.267.21	153,00	5	-	1	1,1	≈8,3	<-5	0,5
LONG LIFE 710 POCKET	113.167.40	38,50	-	100	5	-	-	-	0,1

Long Life Sealer

Liquid sealer for heating systems

Liquid self-sealer to remove small leaks (up to 50 litres/day) in heating systems. **Suitable for all metals of the system, including aluminium.** Dose 1 litre of product per 100 litres of system water. **An overdosage does not cause any problems to the system.** Circulate the product and leave it inside the system.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE SEALER	133.350.40	43,90	1	6	1,01	≈7,4	<0	1

Long Life 500

Atoxic antifreeze with corrosion inhibitors for copper, steel and aluminium

Concentrated atoxic antifreeze protective liquid with specific inhibitors to control scale and corrosion in heating systems in cold climates. Suitable for all metals of the system, including aluminium. **An overdosage does not cause any problems to the system.** Dose depending on the required freeze protection level.

DILUTION TABLE		
LL 500%	WATER%	PROTECTION TEMPERATURE
25	75	-10 °C
33	67	-15 °C
40	60	-22 °C
50	50	-33 °C



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	BOILING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE 500	113.364.22	56,20	5	1	1,05	≈9,5	160	depending on required freeze protection level
LONG LIFE 500	113.364.21	243,00	20	1	1,05	≈9,5	160	depending on required freeze protection level

Gel Termol ECO

Organic based atoxic antifreeze, for heating systems, cooling circuits of food processing machinery and solar panels

Organic based, concentrated, colourless, atoxic antifreeze heat transfer fluid. Formulated as an alternative to antifreeze fluids based on petroleum-derived propylene glycol. Specific to protect against freeze the heating systems which remain off for a period enough for freezing. Can also be used in cooling circuits of food processing machinery and for solar panels.

DILUTION TABLE		
GEL TERMOL ECO %	WATER%	PROTECTION TEMPERATURE
35	65	-11 °C
40	60	-14 °C
50	50	-22 °C
60	40	-31 °C



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT (at 20 °C)	SPECIFIC HEAT	THERMAL CONDUCTIVITY	BOILING POINT	DOSAGE
		€	kg	pcs.	kg/dm ³	J/g °C	J/cm s °C	°C	%
GEL TERMOL ECO	111.011.20	135,00	25	1	1,22	2,43	18,18	290	depending on required freeze protection level

Gel Termol AT / AT-20

Atoxic antifreeze based on inhibited **propylene glycol** for heating systems. For a protection down to -20 °C

Colourless, atoxic, antifreeze liquid based on inhibited propylene glycol. Protects against freeze the heating systems which remain off for a period enough for freezing. Also available in the version AT -20, ready for use, for a protection down to -20 °C.

DILUTION TABLE		
GEL TERMOL GV %	WATER %	PROTECTION TEMPER.
25	75	-10 °C
33	67	-15 °C
40	60	-22 °C
50	50	-33 °C



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK.	SPECIFIC WEIGHT (at 20°C)	SPECIFIC HEAT	THERMAL CONDUCTIVITY	BOILING POINT	DOSAGE
		€	kg	pcs.	Kg/dm³	J/g °C	J/cm s °C	°C	%
GEL TERMOL AT	111.010.32	237,00	25	1	1,050	2,5	20,65	167	depending on required freeze protection level
GEL TERMOL AT	111.010.50	95,90	10	1	1,050	2,5	20,65	167	depending on required freeze protection level
GEL TERMOL AT -20	111.030.32	92,80	25	1	1,052	2,5	18,7	103	100
GEL TERMOL AT -20	111.030.50	37,90	10	1	1,052	2,5	18,7	103	100

Gel Termol GV / GV-20

Antifreeze based on inhibited **ethylene glycol** for heating systems. For a protection down to °C

Antifreeze liquid based on inhibited ethylene glycol. Protects against freeze the heating systems which remain off for a period enough for freezing. Also available in the version GV -20, ready for use, for a protection down to -20 °C.

DILUTION TABLE		
GEL TERMOL GV %	WATER %	PROTECTION TEMPER.
25	75	-13 °C
33	67	-20 °C
40	60	-26 °C
50	50	-37 °C



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK.	SPECIFIC WEIGHT (at 20°C)	BOILING POINT	DOSAGE
		€	kg	pcs.	Kg/dm³	°C	%
GEL TERMOL GV	111.050.33	145,00	25	1	1,12	168	depending on required freeze protection level
GEL TERMOL GV	111.050.50	59,50	10	1	1,12	168	depending on required freeze protection level
GEL TERMOL GV	111.050.60	31,60	5	1	1,12	168	depending on required freeze protection level
GEL TERMOL GV -20	111.051.32	67,20	25	1	1,056	108	100% - without dilution for a protection down to -20 °C
GEL TERMOL GV -20	111.051.50	28,50	10	1	1,070	108	100% - without dilution for a protection down to -20 °C

SOLAR HEATING SYSTEMS

Long Life 100 Solar

Atoxic heat transfer fluid **with corrosion inhibitors** for solar systems

Ready-for-use multifunction product to control corrosion and scale and protect solar heating systems from frost down to -20 °C. Suitable for all materials generally present in systems.

PRESSURE	BOILING TEMPERATURE
1 bar	103 °C
2 bar	123 °C
3 bar	140 °C



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	DENSITY (at 20 °C)	pH	FREEZING POINT	DOSAGE
		€	l	pcs.	g/cm ³		°C	%
LONG LIFE 100 SOLAR	113.358.10	62,20	10	1	1,03	≈9	<-20	100
LONG LIFE 100 SOLAR	113.358.90	118,00	20	1	1,03	≈9	<-20	100

WATER SYSTEMS

Gelphos L / L15

Anti scale anti corrosion liquid for water systems

Ready-for-use liquid product for the anti scale anti corrosion treatment of domestic and industrial water systems. Gelphos L is specific for water with hardness level higher than 15 °f. Also available in the L15 version, specific for water with hardness level lower than 15 °f. To be used with proportional metering pumps (Dosamatic PP/PPI big).



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	WATER HARDNESS	DOSAGE
		€	Kg	pcs.	Kg/dm ³		°f	ppm
GELPHOS L	107.020.12	84,30	25	1	1,02	≈7,3	>15	60-80
GELPHOS L 15	107.025.12	85,50	25	1	1,02	≈7,3	<15	60-80

Biclor

Disinfectant based on **chlorine dioxide**

Biclor is a disinfectant based on chlorine dioxide. Its two components together form chlorine dioxide, which allows to prevent Legionella bacterium from proliferating inside all water systems, including hot sanitary water production systems. Unlike chlorine, Biclor has a more invasive action towards Biofilm, which is the nourishment for Legionella.



ITEM	ITEM CODE	UNIT PRICE	PACK
		€	pcs.
BICLOR GEL 5	107.035.40	253,00	1
BICLOR GEL 25	107.035.45	628,00	1

Gelclor

Disinfectant based on **sodium hypochlorite**

Ready-to-use liquid product based on sodium hypochlorite for water disinfection in civil and industrial water systems. To be used with proportional metering pumps (Dosamatic PP/PPI Big).



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	ACTIVE CHLORINE CONCENTRATION	RESIDUAL CHLORINE CONCENTRATION ACTIVE
		€	Kg	pcs.	Kg/dm ³	%	ppm
GELCLOR	107.035.02	70,40	25	1	1,22	>10	0,2-0,4

Oxygel

Disinfectant based on **hydrogen peroxide and silver salts**

Oxygel is a disinfectant based on hydrogen peroxide and silver salts. It is used against Legionella, as the combined action between hydrogen peroxide and silver salts has a broad spectrum disinfecting function, thus satisfying the laboratory test prEN 13623 (Chemical disinfectants and antiseptics. Bactericidal activity of product against Legionella spp.).



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€	Kg	pcs.
OXYGEL 5	107.035.80	106,00	5	1
OXYGEL 20	107.035.85	348,00	20	1

Gel Peracetic

Strong sanitizer based on **peracetic acid**

Concentrated liquid product based on peracetic acid, to remove organic and inorganic deposits in civil and industrial water systems. Specific for disinfecting hot water cisterns and storage tanks. Able to remove scale and deposits of organic nature (biofilm). Suitable for restoring systems with Legionella problems.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DOSAGE
		€	Kg	pcs.	Kg/dm ³		
GELPERACETIC	110.100.60	312,00	25	1	1,15	<2	1l + 15 l acqua

Gelfilmex

Anti corrosion product

Gelfilmex is an anti corrosion liquid to be used in water systems, for potable and general use. Product forms a protective film which prevents direct contact between water and piping metal.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH
		€	Kg	pcs.	Kg/dm ³	
GELFILMEX	107.011.42	103,00	25	1	1,05	≈8,5

COOLING SYSTEMS

Gelcid

Algaecide for cooling systems

Anti algae liquid product for cooling systems, swimming pools, fountains, fire tanks.
Initial dosage: 25 ppm.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH (at 5% solution)	MAINTENANCE DOSAGE
		€	kg	pcs.	kg/dm ³		ppm
GELCID	107.035.13	46,20	10	1	1,012	7	5 ogni 15 gg

Poly Ice

Corrosion inhibitor for cooling systems

Anti corrosion liquid product to prevent corrosion and scale problems due to raw water which feeds and refills cooling circuits. To be dosed directly or using proportional metering pumps.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	FREEZING POINT	DOSAGE
		€	kg	pcs.	kg/dm ³		°C	ppm
POLY ICE	107.028.30	287,00	20	1	1,02	3,8	-2	40-200

STEAM GENERATORS

Polyvapour

Corrosion inhibitor for steam generators

- Specific for the treatment of steam generators fed with softened water
- Specific for the treatment of steam generators fed with demineralised water
- Specific for the treatment of steam generators of food industry



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DOSAGE
		€	kg	pcs.	Kg/dm ³		
POLYVAPOUR S	107.029.10	315,00	20	1	0,99	12	60-100 ppm
POLYVAPOUR D	107.029.20	428,00	20	1	0,99	12,6	10-100 ppm
POLYVAPOUR A	107.029.30	322,00	20	1	1,23	13,1	40 g/g O ₂



Descaling



Descaling pumps

Baby 13 / Boy C 15 Super / Boy C 30 / Boy C Inverter / Boy C Matic / Boy C / Boy Jet 20M / Air Force 1

94



Descaling and sanitizing chemicals

Boiler Cleaner DP / Boiler Cleaner ECO / Boiler Cleaner DE / Boiler Cleaner E / Boiler Cleaner LZ / Boiler Cleaner P / Boiler Cleaner PZ / Boiler Cleaner N / Boiler Cleaner SAFE / Boiler Cleaner Economix / Boiler Cleaner Fumi Plus / Gelmix

97

Baby 13

Descaling pump **with flow reverser.**
With shoulder strap for easy carrying

Pump for descaling coils of boilers and of small heat exchangers. Equipped with flow reverser.



ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROT.*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESS.	WEIGHT	DIMENS. (LxHxZ)
		€	V - Hp	IP	l/min		l	bar	kg	cm
BABY 13	121.300.00	611,00	230 - 0,17	54	28	1/2"	13	1,0	8	46x28x52

* Referred to the motor

Boy C 15 Super

Descaling pump **with flow reverser**

Pump for descaling coils of boilers, heat exchangers, cooling circuits, water heaters and evaporation towers. Recommended for difficult descaling operations.



ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROT.*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESS.	WEIGHT	DIMENS. (LxHxZ)
		€	V - Hp	IP	l/min		l	bar	kg	cm
BOY C 15 SUPER	121.031.00	720,00	230 - 0,20	54	33	1/2"	15	1,2	9,2	35x48

* Referred to the motor

Boy C 30

Descaling pump **with flow reverser**
for difficult descaling operations

Pump for descaling coils of boilers, heat exchangers, cooling circuits, water heaters and evaporation towers. Recommended for difficult descaling operations.



ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROT.*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESS.	WEIGHT	DIMENS. (LxHxZ)
		€	V - Hp	IP	l/min		l	bar	kg	cm
BOY C 30	121.070.00	887,00	230 - 0,45	54	39	1/2"	24	1,5	11,6	40x63

* Referred to the motor



If you are looking for a descaling and power flushing pump, go to **page 78**

Boy C Inverter

Descaling pumps with flow reverser

Pump for descaling coils of boilers, heat exchangers, cooling circuits, water heaters and evaporation towers. Recommended for difficult descaling operations.



230

ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROT.*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESS.	WEIGHT	DIMENS. (LxHxZ)
		€	V - Hp	IP	l/min		l	bar	kg	cm
BOY C 130	121.110.00	994,00	230 - 0,45	54	39	1/2"	100	1,5	15,2	53x70
BOY C 190	121.150.00	1.451,00	230 - 0,75	54	102	1"	100	1,8	18,8	53x72
BOY C 230	121.190.00	1.576,00	230 - 0,75	54	102	1"	200	1,8	23,2	67x85

* Referred to the motor

Boy C Matic

Descaling pumps with automatic flow reverser

Pump for descaling coils of boilers, heat exchangers, cooling circuits, water heaters and evaporation towers. Recommended for difficult descaling operations.



15 Matic

30 Matic

ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROT.*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESS.	WEIGHT	DIMENS. (LxHxZ)
		€	V - Hp	IP	l/min		l	bar	kg	cm

WITH AUTOMATIC FLOW REVERSER

BOY C15 MATIC	121.035.00	896,00	230 - 0,17	54	33	1/2"	15	1,0	6,0	35x48
BOY C30 MATIC	121.075.00	1.093,00	230 - 0,45	54	44	1/2"	24	1,5	10,5	40x63

* Referred to the motor

Boy C

Descaling pumps

Pumps for descaling coils of boilers, heat exchangers, cooling circuits, water heaters and evaporation towers. The models fitted with flow reverser and automatic flow reverser are recommended for difficult descaling operations. The BOY C 200 model is a horizontal axle pump, magnetically coupled and not self priming. Recommended for descaling coils of large heat exchangers, large water heaters, large cooling circuits and large evaporation towers.



10

120

200

ITEM	ITEM CODE	UNIT PRICE	MOTOR	DEGREE OF PROT.*	MAX FLOW RATE	CONNECT.	TANK CAPACITY	PRESS.	WEIGHT	DIMENS. (LxHxZ)
		€	V - Hp	IP	l/min		l	bar	kg	cm
BOY C 10	121.010.00	529,00	230 - 0,17	54	28	1/2"	15	1,0	8,2	35x48
BOY C 20	121.050.00	790,00	230 - 0,45	54	39	1/2"	24	1,5	11,6	40x63
BOY C 120	121.090.00	901,00	230 - 0,45	54	39	1/2"	100	1,5	15,2	53x70
BOY C 180	121.130.00	1.230,00	230 - 0,75	54	102	1"	100	1,8	18,8	53x72
BOY C 200**	121.220.00	3.827,00	230 - 1,5	54	330	1 1/2" x 40 mm (inlet) 1 1/4" x 32 mm (flow)	-	1,8	22	25x45x25
BOY C 220	121.170.00	1.386,00	230 - 0,75	54	102	1"	200	1,8	23,2	67x85

* Referred to the motor - ** Ask for availability

Spare parts and accessories for metering pumps

ITEM	ITEM CODE	UNIT PRICE	DESCRIPTION
		€	
ADAPTORS KIT 10-130	600.233.10	15,10	2 pcs. hose fittings with seal (1/2") F + cap
ADAPTORS KIT 180-230	600.234.10	15,20	2 pcs. hose fittings with seal (1") F
THREAD KIT OF ADAPTORS	600.060.10	31,30	2 pcs (1/2-3/8") MF; 2 pcs (1/2-3/8") MM; 2 pcs (3/4-1/2") MM; 2 pcs (3/4-3/4") FF (suitable for BOY C 10 - 15 - 20 - 30 - 120 - 130 - BABY 13)
HOSES MT 2 X 2 + FITTINGS	600.330.10	18,60	
PP BOLT 10 MA	472.005.40	0,24	
PP BOLT 8 MA	472.005.30	0,23	

Boy Jet 20 M

Spraying pump for cleaning fireside of boilers

Diaphragm spraying pump to clean the fireside of boilers and finned batteries of air conditioners, refrigeration systems and convectors.



ITEM	ITEM CODE	UNIT PRICE	MOTOR	TANK CAPACITY	ADJUSTABLE PRESSURE	WEIGHT	DIMENSIONS (LxHxZ)
		€	Hp	l	bar	kg	cm
BOY JET 20 M	127.050.00	1.597,00	0,9	20	0-20	20	25x37x60

Air Force 1

Pressure pump to fill heating systems and clean combustion chambers of condensing boilers

Pressure pump to fill conditioning chemicals into heating systems and clean combustion chambers of condensing boilers. To be used with Boiler Cleaner Economix and Long Life 100. Supplied with Connection kit for MiniMag filter.



ITEM	ITEM CODE	UNIT PRICE	MAX PRESSURE WITH TANK FULL	MATERIAL	TANK CAPACITY
		€	bar		l
AIR FORCE 1	106.051.00	41,00	2	PP	1

HEAT EXCHANGERS

Boiler Cleaner DP

Non fuming strong descaler for heat exchangers in **copper and/or steel**

Non fuming concentrated liquid product, for systems and heat exchangers in copper and steel. To be used with pumps of the Boy C and LL Superflush lines.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DILUTION (depending on level of scale)	COLOUR CHANGE INDICATOR	
		€						Active product	Exhausted product
BOILER CLEANER DP	113.030.20	133,00	25	1	1,2	<1	20-40	red	yellow-orange
BOILER CLEANER DP	113.030.30	56,10	10	1	1,2	<1	20-40	red	yellow-orange

Boiler Cleaner ECO

Non fuming eco-friendly descaler for heat exchangers in **copper and/or steel**

Non fuming concentrated liquid product, for systems and heat exchangers in copper and steel. To be used with pumps of the Boy C and LL Superflush lines.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DILUTION (depending on level of scale)		
		€							
BOILER CLEANER ECO	113.020.20	85,20	25	1	1,1	1	20-40		
BOILER CLEANER ECO	113.020.30	36,00	10	1	1,1	1	20-40		

Boiler Cleaner DE

Strong descaler for heat exchangers in **copper and/or steel**

Concentrated liquid product with strong reaction, for systems and heat exchangers in copper and steel. To be used with pumps of the Boy C and LL Superflush lines.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DILUTION (depending on level of scale)	COLOUR CHANGE INDICATOR	
		€						Active product	Exhausted product
BOILER CLEANER DE	113.010.20	76,50	25	1	1,15	<1	10-30	red	yellow-orange
BOILER CLEANER DE	113.010.30	32,30	10	1	1,15	<1	10-30	red	yellow-orange
BOILER CLEANER DE	113.010.50	19,30	5	1	1,15	<1	10-30	red	yellow-orange

Boiler Cleaner E

Strong descaler for heat exchangers in copper

Concentrated liquid product with strong reaction, for systems and heat exchangers in copper. To be used with pumps of the Boy C and LL Superflush lines.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DILUTION (depending on level of scale)	COLOUR CHANGE INDICATOR	
		€	Kg	pcs.	Kg/dm ³		%	Active product	Exhausted product
BOILER CLEANER E	113.005.20	51,20	25	1	1,15	<1	10-20	red	yellow-orange
BOILER CLEANER E	113.005.30	21,90	10	1	1,15	<1	10-20	red	yellow-orange
BOILER CLEANER E	113.005.50	13,70	5	1	1,15	<1	10-20	red	yellow-orange

Boiler Cleaner LZ

Non fuming light descaler for heat exchangers in copper, cast iron, steel, stainless steel, aluminium, brass, tin, light alloys and zinc

Non fuming concentrated liquid product, for systems and heat exchangers in copper, cast iron, steel, stainless steel, aluminium, brass, tin, light alloys and galvanised surfaces. To be used with pumps of the Boy C and LL Superflush lines



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DILUTION (depending on level of scale)	COLOUR CHANGE INDICATOR	
		€	Kg	pcs.	Kg/dm ³		%	Active product	Exhausted product
BOILER CLEANER LZ	113.070.85	198,00	25	1	1,2	<1,5	20-30	rosso	giallo-arancio
BOILER CLEANER LZ	113.070.90	83,10	10	1	1,2	<1,5	20-30	rosso	giallo-arancio

Boiler Cleaner P / PZ

Non fuming powder descaler for heat exchangers in copper, cast iron, steel, stainless steel, aluminium, brass, tin, light alloys and zinc

Non corrosive non fuming concentrated product in powder, for systems and heat exchangers in copper, cast iron, steel, stainless steel, aluminium, brass, tin and light alloys. To be used with pumps of the Boy C and LL Superflush lines.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DILUTION (depending on level of scale)	COLOUR CHANGE INDICATOR	
		€	Kg	pcs.	Kg/dm ³		%	Active product	Exhausted product
BOILER CLEANER P	113.050.15	222,00	25	1	1,6	1,2	10-15	red	yellow-orange
BOILER CLEANER P	113.050.50	93,80	10	1	1,6	1,2	10-15	red	yellow-orange
BOILER CLEANER P	113.050.70	19,30	1,5	20	1,6	1,2	10-15	red	yellow-orange
BOILER CLEANER PZ	113.070.15	265,00	25	1	1,6	1,2	10-15	red	yellow-orange
BOILER CLEANER PZ	113.070.50	114,00	10	1	1,6	1,2	10-15	red	yellow-orange
BOILER CLEANER PZ	113.070.70	20,90	1,5	20	1,6	1,2	10-15	red	yellow-orange

Boiler Cleaner N

Neutralizer for system protection to remove residual acidity after descaling

Concentrated product in powder to remove residual acidity after descaling. Also suitable for neutralizing the exhausted liquid once descaling is complete. To be used with Boy C pumps.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH (10% solution)	DOSAGE
		€	Kg	pcs.	Kg/dm ³		%
BOILER CLEANER N	113.130.45	146,00	25	1	1,2	13	3-5
BOILER CLEANER N	113.130.30	62,20	10	1	1,2	13	3-5
BOILER CLEANER N	113.130.50	10,90	1	20	1,2	13	3-5

WATER SYSTEMS

Boiler Cleaner Safe

Descaling sanitizer for **hot water sanitary systems**

Concentrated liquid product, to sanitize and descale hot sanitary water systems. Sanitized systems are more efficient and considerably reduce the risk of Legionella. Product is suitable for all metals. To be used with Boy C and/or LL Superflush pumps.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	PH (depending on level of scale)
		€	Kg	pcs.	Kg/dm ³		%
BOILER CLEANER SAFE	109.080.55	150,00	25	1	1,15	1	10-20
BOILER CLEANER SAFE	109.080.57	31,40	5	1	1,15	1	10-20
BOILER CLEANER SAFE	109.080.52	6,70	1	12	1,15	1	10-20

COMBUSTION CHAMBER OF CONDENSING BOILERS

Boiler Cleaner Economix

Descaler to clean the combustion chamber of condensing boilers

Ready-to-use liquid product to clean the combustion chamber of condensing boilers. **Safe to use with all metals, including aluminium.** To be used with the Air Force 1 pressure pump (106.051.00).



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	DILUTION (depending on level of scale)
		€	Kg	pcs.	Kg/dm ³		%
BOILER CLEANER ECONOMIX	131.061.30	10,20	1	6	1,004	3,2	with the Air Force 1 pump

FIRESIDES OF BOILERS

Boiler Cleaner Fumi Plus

Degreaser descaler to clean fireside of boilers

Odourless liquid product with descaling and degreasing action to clean fireside of boilers. To be sprayed with the pump Boy Jet 20 M directly in the combustion chamber whilst boiler is off.



ITEM	ITEM CODE	UNIT PRICE €	CAN Kg	PACK pcs.	SPECIFIC WEIGHT Kg/dm ³	pH	DOSAGE %
BOILER CLEANER FUMI PLUS	129.020.20	167,00	25	1	1,2	11	20-50
BOILER CLEANER FUMI PLUS	129.020.35	71,50	10	1	1,2	11	20-50
BOILER CLEANER FUMI PLUS	129.020.45	21,40	1	12	1,2	11	-

Gelmix

Powder descaler to clean fireside of oil fired boilers
(gas oil, coal oil)

Product in powder to clean the fireside of boilers. To be introduced directly into the combustion chamber whilst the boiler is off. Suitable for oil and gas-fired boilers.



ITEM	ITEM CODE	UNIT PRICE €	CAN Kg	PACK pcs.	SPECIFIC WEIGHT Kg/dm ³	COMBUSTION TEMPERATURE °C
GELMIX	129.010.10	623,00	25	1	1,15	200
GELMIX	129.010.30	45,80	1,5	20	1,15	200
GELMIX	129.010.50	14,50	0,375	25	1,15	200
GELMIX	129.010.70	7,90	0,185	50	1,15	200



Over the counter technical products



Over the counter products

WC Cleaner / Climapur / Detex Plus / Cleaner DEC /
Gelock / Gel Gas Detector / Gel Print / Gel Cleaner Spray / Hand Cleaner

WC Cleaner

Descaler for toilet tanks

Ready-for-use liquid descaler able to dissolve calcium deposits on toilet tanks. Restores proper operation of floats and stops toilets continually running, which make ceramic yellowish.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK	SPECIFIC WEIGHT	pH	COLOUR CHANGE INDICATOR	
		€					Active product	Exhausted product
WC CLEANER	113.005.80	8,90	1	6	1,15	<1	red	yellow-orange

Climapur

Cleaner for filters and terminal units of convectors

Liquid cleaner and sanitiser with bacteriostatic and bactericide action, for filters and terminal units of convectors. Thanks to the synergic action of hydrogen peroxide, silver salts and wetting agents, just a few sprays of product are enough to treat the surface to be cleaned.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€		
CLIMAPUR	133.010.50	33,20	5 Kg	1
CLIMAPUR	133.010.55	16,40	900 ml	12

Detex Plus

Cleaner for finned batteries

Liquid product with cleaning and sanitising action, for finned batteries of air conditioners, refrigeration systems and convectors. To be used by immersion or by spraying with Boy Jet 20 M pump.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€		
DETEX PLUS	133.010.20	184,00	25	1
DETEX PLUS	133.010.35	76,50	10	1

Cleaner DEC

Cleaner for parts in copper, brass and its alloys

Ready-for-use liquid product to remove deposits, metal oxides on components in copper, brass and its alloys. To be used by immersion of the component. After use spray the treated component.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€	Kg	pcs.
CLEANER DEC	131.060.20	103,00	5	1

Gelock

Sealer for threaded joints

Anaerobic sealer for threaded joints, approved for gas, lpg and water (DIN-DVGW 30661). Forms a gummy elastic film guaranteeing a perfect seal even if there are vibrations




ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€	Kg	pcs.
GELOCK	180.300.10	18,10	100	24

Gel Gas Detector

Spray gas leak detector

Spray gas leak detector, even with minimum pressures up to 0,02 bar, on piping of methane, gas, lpg, oxygen, hydrogen, nitrogen, argon, chlorine, CO2, ethylene oxides, methylene, air.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€	Kg	pcs.
GEL GAS DETECTOR	133.055.50	14,20	400 ml	10

Gel Print

Drain cleaner

Cleaner for drains, toilets and washbasins, able to dissolve most difficult obstructions.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€	ml	pcs.
GEL PRINT	185.200.10	8,30	750	6

Gel Cleaner Spray

Spray degreaser and cleaner to clean heads of burners and nozzles. Releaser and lubricant

Spray degreaser and cleaner able to remove combustion residues from the heads of burners and nozzles. Also able to release oxidised bolts and nuts.



ITEM	ITEM CODE	UNIT PRICE	CAN	PACK
		€	ml	pcs.
GEL CLEANER SPRAY	133.050.00	7,20	400	12

Hand Cleaner

Ultra-resistant cleaning wipes for hand cleaning. With antibacterial agents

Slightly abrasive wet wipes with degreasing, sanitizing and antibacterial action. Ideal for cleaning hands. Remove grease, oils, adhesives, carbon and graphite.



ITEM	ITEM CODE	UNIT PRICE	PACK
		€	pcs.
HAND CLEANER	180.300.50	16,30	6

























Meters & test kits










Meters & test kits

106

	ITEM	PACK.	ITEM CODE	UNIT PRICE	DESCRIPTION	RANGE	RESOLUTION
		pcs.		€			
	CONDUCTIVITY TESTER	1	155.010.05	357,00	Pocket conductivity tester	0-1999 µS/cm	10 µS/cm with temperature sensor
	CONDUCTIVITY CALIBRATION SOLUTION	25 bags 20 ml. each	155.010.15	98,90	Specific solution for calibrating conductivity tester	-	-
	PH TESTER	1	155.010.18	295,00	Pocket pH tester	0-14	0,1 with temperature sensor
	CALIBRATION SOLUTION PH 4-7	5 + 5 bags 20 ml. each	155.010.25	45,80	Specific solution for calibrating pH tester from pH 4 to 7	-	-
	Calibration solution pH 7-10	5 + 5 bags 20 ml. each	155.010.26	45,80	Specific solution for calibrating pH tester from pH 7 to 10	-	-
	FREE AND TOTAL CHLORINE METER	1	155.010.30	857,00	Pocket electronic meter to measure free and total chlorine	0,00-2,50 mg/l (Cl2 libero) 0,00-3,50 mg/l (Cl2 totale)	0,01 mg/l
	FREE CHLORINE REAGENT KIT	100 tests	155.015.10	81,60	Reagents to measure free chlorine	-	-
	TOTAL CHLORINE REAGENT KIT	100 tests	155.015.20	81,60	Reagents to measure total chlorine	-	-
	IRON METER	1	155.010.40	782,00	Pocket electronic meter to measure IRON	0,00-5,00 mg/l	0,01 mg/l
	IRON REAGENT KIT	100 tests	155.015.30	74,50	Reagents to measure iron	-	-
	NITRATES METER	1	155.010.50	683,00	Pocket electronic meter to measure nitrates	0,0-30,0 mg/l	0,01 mg/l

	ITEM	PACK.	ITEM CODE	UNIT PRICE	DESCRIPTION	RANGE
		pcs.		€		
	NITRATES REAGENT KIT	100 tests	155.015.40	213,00	Reagents to measure NITRATES	
	INHIBITOR TEST KIT	1	155.011.50	78,00	Check test for inhibitor level	
	BIO TEST KIT	1	155.011.60	52,20	Check test for bacterial load	
	REFRACTOMETER	1	155.011.80	133,00	Tool for testing freeze protection level	
	REFRACTOMETER FOR GEL TERMOL ECO	1	155.011.85	204,00	Tool for testing protection level and concentration of GEL TERMOL ECO	
	IR THERMOMETER	1	155.011.90	114,00	Thermometer for temperature measurement	
	HARDNESS TEST KIT		471.000.15	32,80	Kit to measure hardness. Colour change test	(1)
	UNIVERSAL PH TEST KIT		471.000.20	29,20	Kit to measure pH. Colorimetric test	(2) 1-11
	CHLORINE TEST KIT		471.000.30	42,50	Kit to measure chlorine. Colorimetric test	(3)
	CHLORIDES TEST KIT		471.000.40	49,70	Kit to measure chlorides. Colour change test	(4)
	IRON TEST KIT		471.000.50	67,30	Kit to measure dissolved iron. Colorimetric test	(5)

	ITEM	PACK.	ITEM CODE	UNIT PRICE	DESCRIPTION	RANGE
		pcs.		€		
	NITRATES TEST KIT		471.000.60	82,60	Kit to measure nitrates. Colorimetric test	(6)
	PHOSPHATES TEST KIT		471.000.70	49,70	Kit to measure phosphates. Colorimetric test	(7)
	AMMONIA TEST KIT		471.000.80	49,70	Kit to measure ammonia. Colorimetric test	(8)
	NITRITES TEST KIT		471.000.90	47,20	Kit to measure nitrites. Colorimetric test	(9)
	MINILAB CASE 9 KITS		155.000.10	534,00	Includes the 9 above-mentioned kits	
	CHLORINE DIOXIDE TEST KIT		471.001.24	48,00	Kit to measure chlorine dioxide. Colorimetric test	
	BOILER ALKALINITY KIT		471.001.00	46,20	Kit to measure alkalinity. Colour change test	
	SINGLE BOTTLE HARDNESS KIT		471.000.11	17,10	Kit to measure hardness. Colour change test	



Do you know why scale costs too much in all houses?

and to get the same heat we spend more every year?



5%

GAS: $1.246^* \text{ m}^3 \times 0,82 \text{ €} = 1.022 \text{ €/year}$



15%

Every year $\approx 400 \text{ €}$ of gas are wasted.

Heated water causes scale deposits between 0.5 and 1 mm on average every year. 1 mm of scale increases gas consumption by 18%. After some years, waste can exceed 50%.


Heating system and sanitary hot water production account for 95% of gas consumption*. Below is what you need to know to recover from 18% to 50% of the gas wasted:

- In Italy there are about 20 millions of systems. Above 60% of them are outdated and inefficient.
- Water treatment units protect the system efficiency.
- System efficiency is restored when washing and power flushing.
- Water treatment units in heating and sanitary circuits are highly recommended according to the European regulations on energy consumption.

* Italian national average, source: ISTAT



80%

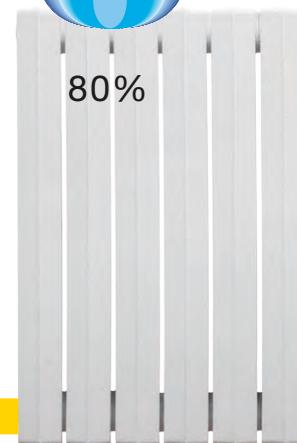



Test water hardness.

**DISPENSER
FOR HARDNESS
KITS**
155.010.70

If hardness is above 25 French degrees,
the system shall be equipped with:



HOT SANITARY WATER

- filter
- water softener
- dosing unit

HEATING

- filter
- protective
chemical

If you are prepared, you will not waste.

Bring your system into compliance.

REAL SAVING STARTS HERE.





LL200 SOLAR
Page 80



LL SUPERFLUSH 40
Page 78

1

Flush and Sanitize

the heating and solar system
to recover their original efficiency

**POWER FLUSH THE SYSTEM WITH THE SUPERFLUSH
WASH THE SYSTEM WITH THE BOY JET 4 SOLAR**



- impurities
- scale



+ efficiency



+ savings



LL410
Page 80





LL100 SOLAR
Page 90



MINIMAG
Page 97



LL100
Page 86



BOY JET 4 SOLAR
Page 79

2

Protect

the efficiency of the heating
and solar system

USE THE MAGNETIC FILTER
AND THE LONG LIFE PROTECTIVE CHEMICALS



- deposits
+ heat



+ efficiency



+ savings



highly
recommended*



LL500
Page 108





LL SUPERFLUSH 40
Page 78



BOY C 15 SUPER
Page 94



BOILER CLEANER DE
Page 97

3

Descal and Sanitize

the heat exchanger and the hot sanitary water system
to recover their original efficiency
and reduce the risk of Legionella

**POWER FLUSH THE SYSTEM
WITH THE BOY C OR SUPERFLUSH PUMPS**



- deposits
+ heat




+ efficiency



savings



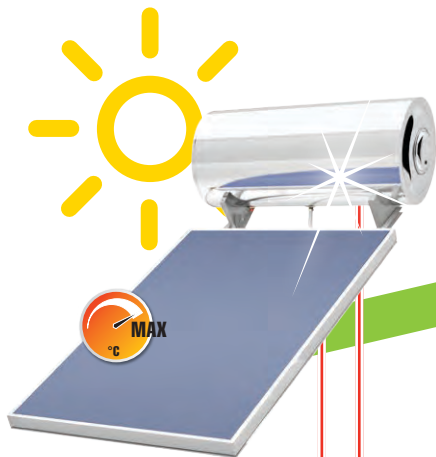

LL100 SOLAR
Page 90



ZEROCAL+ MINI
Page 48



ACQUABLOCK
Page 6



DRYSOFT
Page 37



4

Protect

the efficiency of the heat exchanger
and hot sanitary water system

INSTALL ACQUABLOCK, DECALUX AND ZEROCAL+



- Impurities
- scale



+ efficiency




savings



highly
recommended*



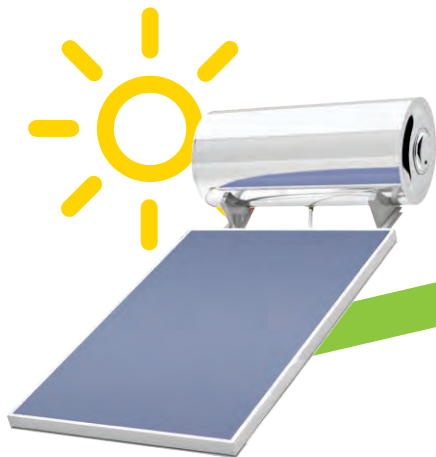

**CLEAR
ACID
NEUTRALIZER**
Page 27

5

Neutralize

the acidic waste
of condensing boilers

INSTALL
THE ACID NEUTRALIZER




+ eco-friendly



highly
recommended**



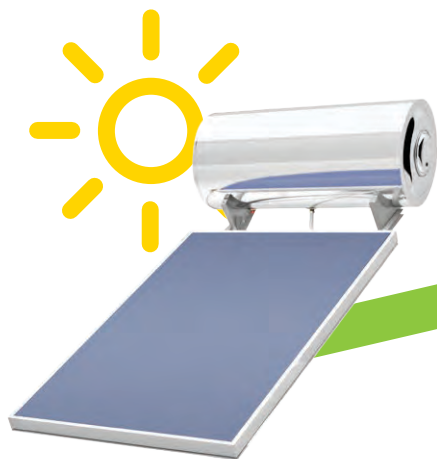

6

Get a better

water from the tap

INSTALL ACQUAClick



- bottles
- pollution




+ convenience
+ savings



+ quality

ACQUAClick
Page 70



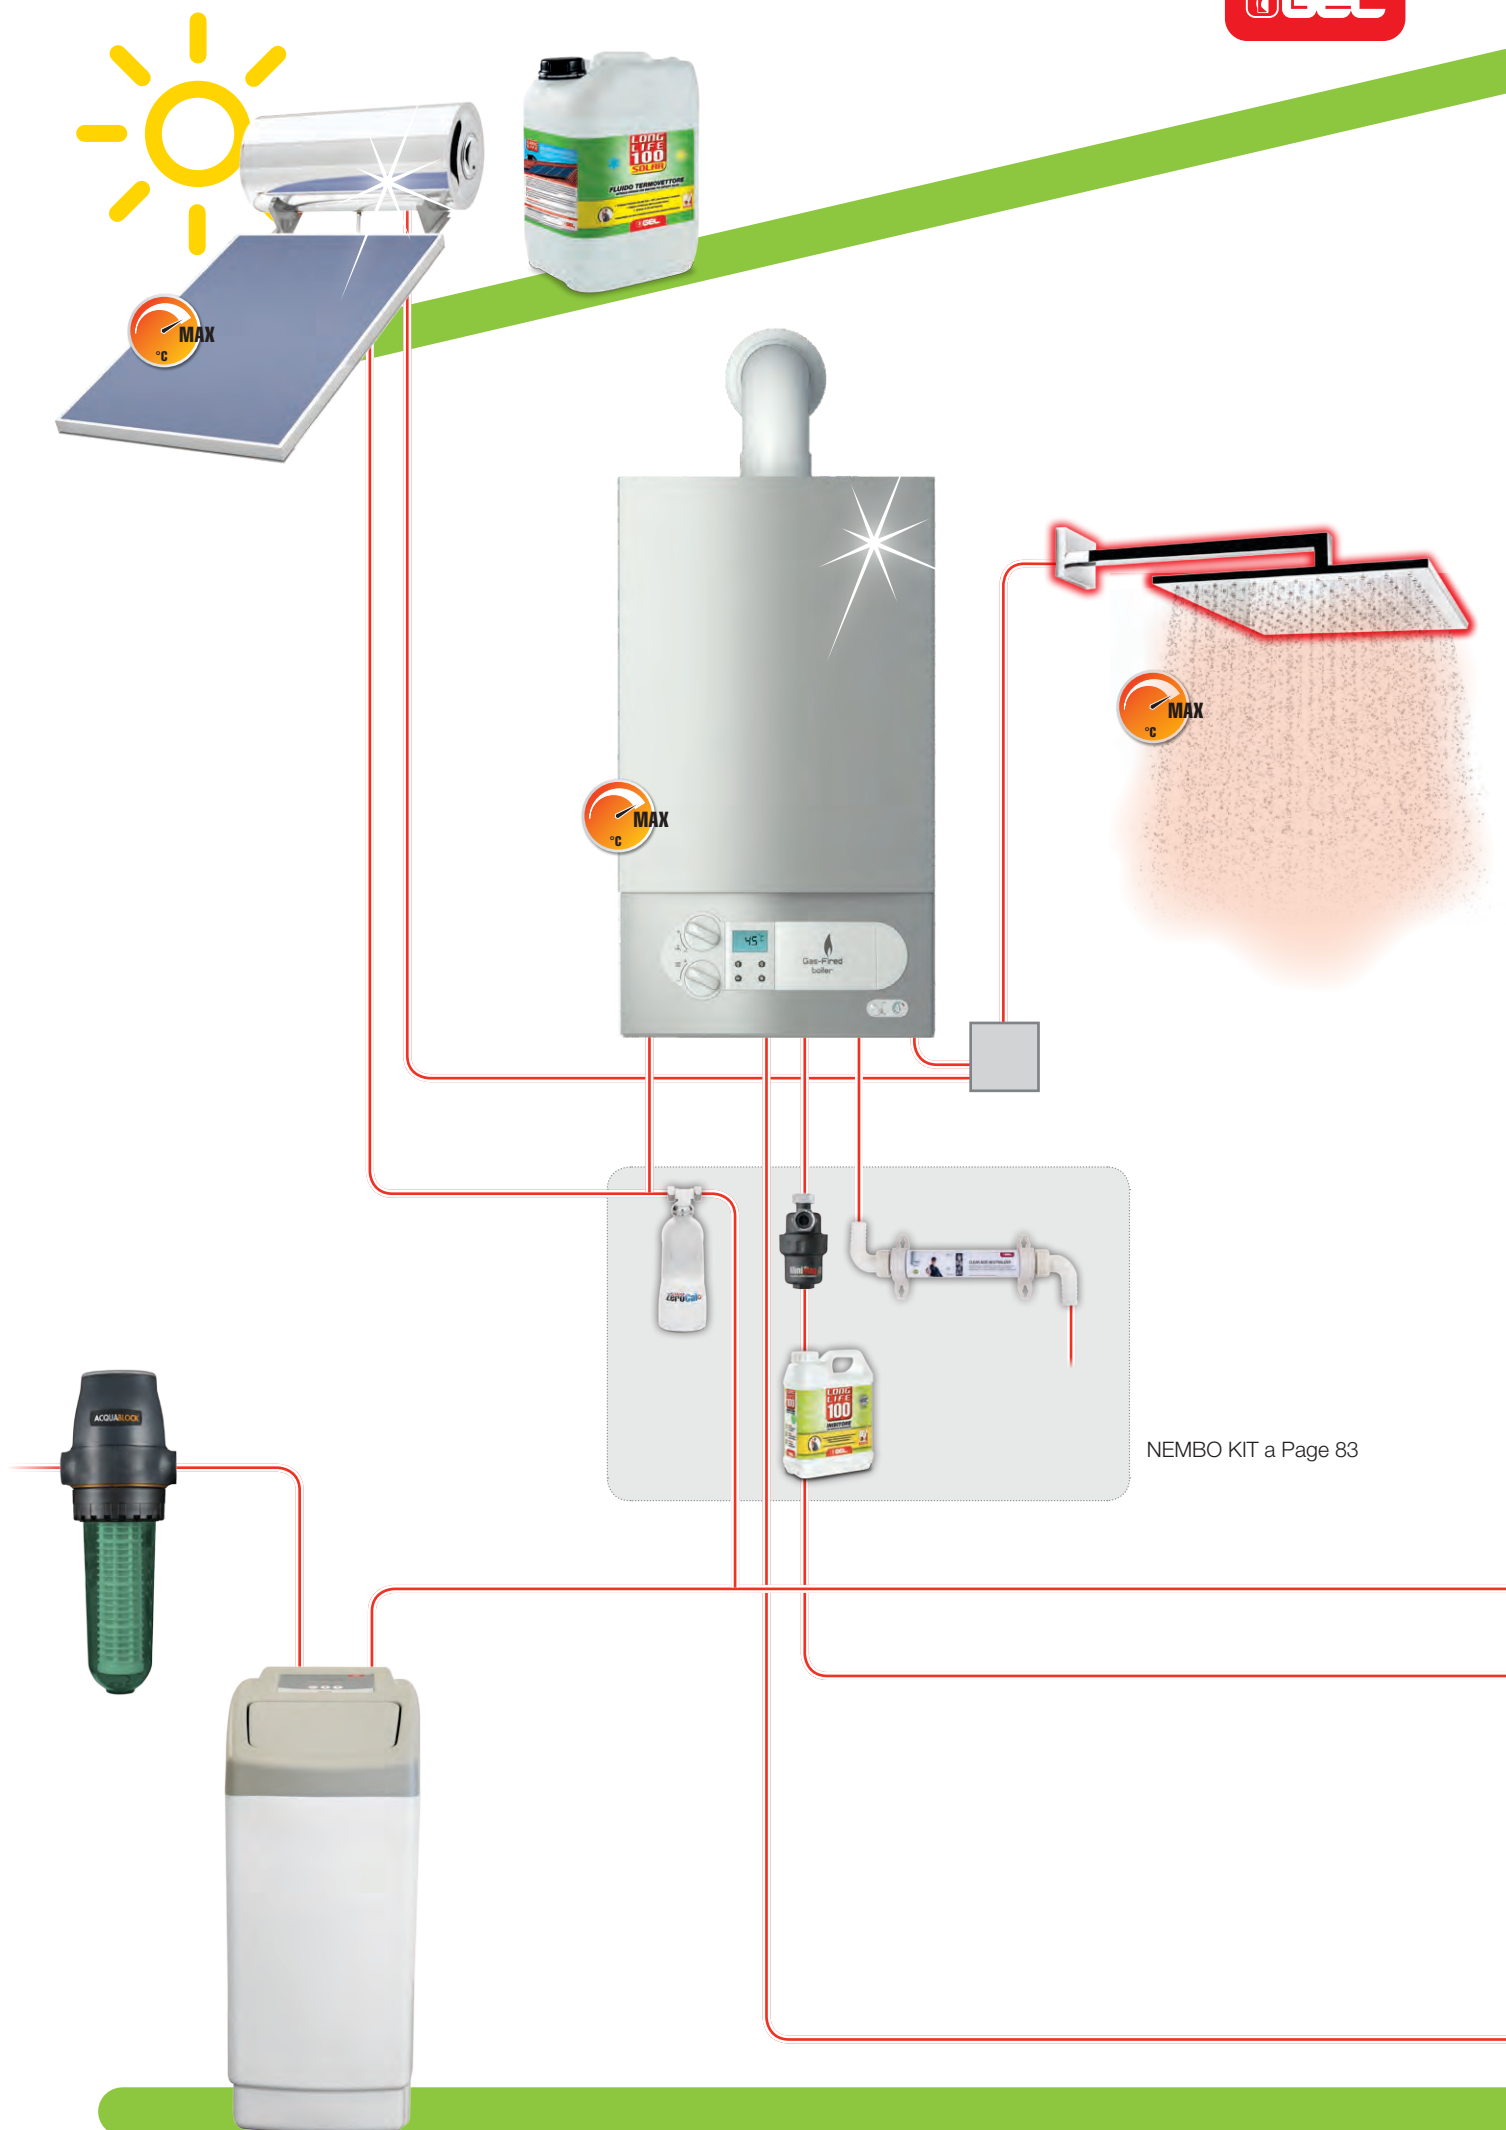

NEMBO KIT a Page 83

With GEL you will have pure water at home and more heat at the lowest cost.

You will save money with a state-of-the-art system

AND YOUR CUSTOMER WILL APPRECIATE THAT!



Legionella Pneumophila

Guidelines for Control and Prevention of Travel Associate Legionnaires' Disease (2015)

International level (WHO), European level (EWGLI)

Legionnaires' Disease, known as Legionellosis, is a lung infection caused by the bacterium legionella pneumophila. Legionella pneumophila is a thin, aerobic, mobile, Gram-negative bacillus. When inhaling infected aerosols which reach the lungs, the humans contract the infection, which can manifest both as pneumonia, "Legionnaires' Disease", and as a flu without pneumonia known as "Pontiac Fever". Even today Legionnaires' Disease is a serious problem due to the high risk of mortality.

Legionella is an ubiquitous bacterium and exists naturally. Its habitat are humid environments (water courses, thermal waters, etc.). Germ passes from these natural tanks into drinking water distribution systems and from here into the pipelines colonising the artificial water environments (sanitary water systems, cooling towers, swimming pools, etc.). The risk factors affecting legionella growth are the following:

1. Bacterium concentration (the legionella concentrations considered to be at risk of infection are those with 1.000 units forming colony per litre of water)
2. Ideal water temperature (25 – 45 °C)
3. Presence of scale deposits and nutritive elements
4. Presence of systems and technological processes that heat and/or spray
5. Susceptibility of the individual

In Italy, health and safety at work are regulated by Legislative Decree 81/2008. This decree transposes in Italy the European Directive on the protection of safety and health of workers.

- The employer is under an obligation to assess the biological risk present in the workplace and carry out necessary procedures to reduce and/or eliminate the risk "in relation to the acquired know-how according to the technical progress" (art. 15 of Legislative Decree Law 81/2008).
- All Italian companies must draft and periodically update a formal 'Document for Risk Assessment', with the content indicated by the norm.
- There is an obligation of immediate updating in case of changes to the company structure or technical know-how
- According to Legislative Decree 81/2008, legionella is one of the microorganisms considered dangerous for workers who can come into contact with it.
- There is an obligation to prevent and, in case of presence of the virus, it is mandatory to immediately restore the hygienic conditions in the workplace.

The importance of risk assessment in the 'new' guidelines (2015)

The risk assessment is essential in order to acquire knowledge on the vulnerability of the systems in terms of:

- potentials of bacteria proliferation within them and of exposure to water aerosols they can determine;
- evaluation of any impact potentially caused by the systems on the health of users (including workers)
- definition and implementation of countermeasures to reduce the risk, with a commitment of efforts and resources commensurate with the potential impact.

How to deal with the legionella issue seriously? From the installation point of view, by taking care of design, implementation and maintenance of the system and, in case of contamination, by adopting accurate reclamation systems after identifying the critical aspects of the water distribution system. In detail, it is recommended to:

Avoid dead end pipes or with low turbulence; avoid stagnant water; avoid too long pipes; avoid open tanks without blowdown; carry out cleaning and sanitization regularly; choose metals inhibiting legionella growth (e.g. copper).

The treatments for control and prevention of legionella are the following:

Heat treatment

- a. Shock. Increase water temperature to 70-80 °C and run water from the taps for 30' per day for 3 days.
- b. Continuous. Keep temperature constant at 60 °C in the hot water distribution system and before mixing with cold water.

Hyperchlorination

- a. Shock. Add a chlorine solution to water (Gelclor) to get a residual chlorine level of 20-50 mg/l for 1-2 hours. Drain water and run new water.
- b. Continuous. Add sodium hypochlorite (Gelclor) to get a residual level between 1 and 3 mg/l.

Chlorine dioxide.

Add chlorine dioxide (Biclor) to the circuit at a concentration of 0,1-1 mg/l without the risk of formation of byproducts (e.g. THM).

Copper-silver ion disinfection.

Add to the circuit copper and silver ions with bactericide action at the maximum allowed concentration set by applicable regulations on potable water.

Hydrogen peroxide-silver

The concentration in water proposed by some authors for the control of water contamination is 10 mg/l for hydrogen peroxide and 10 µg/l for silver ion.

UV Radiation.

UV ray sterilizers (Gelpur Light) must be installed near the point of use. Water flows into a chamber where it is exposed to the ultraviolet light generated by the lamps. At the origin of UV, it is necessary to apply thermal shock or chlorination in order to limit microbiological contamination in the rest of the system.

Regulations



The Council Directive 98/83/EC of 3 November 1998 on the quality of water intended for human consumption) .

COUNCIL DIRECTIVE 98/83/EC of 3 November 1998

Its objective is to protect human health from adverse effects of any contamination of water intended for human consumption by ensuring that it is wholesome and clean.

The Directive applies to:

- all distribution systems serving more than 50 people or supplying more than 10 cubic meter per day, but also distribution systems serving less than 50 people/supplying less than 10 cubic meter per day if the water is supplied as part of an economic activity;
- drinking water from tankers;
- drinking water in bottles or containers;
- water used in the food processing industry, unless the competent national authorities are satisfied that the quality of the water cannot affect the wholesomeness of the foodstuff in its finished form.

The Directive doesn't apply to:

- natural mineral waters recognised as such by the competent national authorities, in accordance with Council Directive 80/777/EEC of 15 July 1980 on the approximation of the laws of the Member States relating to the exploitation and marketing of natural mineral waters and repealed by Directive 2009/54/EC of 18 June 2009 on the exploitation and marketing of natural mineral waters; and
- waters which are medicinal products within the meaning of Council Directive 65/65/EEC of 26 January 1965 on the approximation of provisions laid down by law, regulation or administrative action relating to medicinal products and repealed by Directive 2001/83/EC of 6 November 2001 on the Community code relating to medicinal products for human use.

The Directive laid down the essential quality standards at EU level. A total of 48 microbiological, chemical and indicator parameters must be monitored and tested regularly. In general, World Health Organization's guidelines for drinking water and the opinion of the Commission's Scientific Advisory Committee are used as the scientific basis for the quality standards in the drinking water.

When translating the Drinking Water Directive into their own national legislation, Member States of the European Union can include additional requirements e.g. regulate additional substances that are relevant within their territory or set higher standards. Member States are not allowed, nevertheless, to set lower standards as the level of protection of human health should be the same within the whole European Union.

Member States may, for a limited time depart from chemical quality standards specified in the Directive (Annex I). This process is called "derogation". Derogations can be granted, provided it does not constitute a potential danger to human health and provided that the supply of water intended for human consumption in the area concerned cannot be maintained by any other reasonable means.

The Directive also requires providing regular information to consumers. In addition, drinking water quality has to be reported to the European Commission every three years. The scope of reporting is set out in the Directive. The Commission assesses the results of water quality monitoring against the standards in the Drinking Water Directive and after each reporting cycle produces a synthesis report, which summarizes the quality of drinking water and its improvement at a European level.



Directive 2002/91/EC of the European Parliament and of the Council of 16 December 2002 on the energy performance of buildings.

DIRECTIVE 2002/91/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 16 December 2002

The four key points of the Directive are:

- a common methodology for calculating the integrated energy performance of buildings;
- minimum standards on the energy performance of new buildings and existing buildings that are subject to major renovation;
- systems for the energy certification of new and existing buildings and, for public buildings, prominent display of this certification and other relevant information. Certificates must be less than five years old;
- regular inspection of boilers and central air-conditioning systems in buildings and in addition an assessment of heating installations in which the boilers are more than 15 years old.

The common calculation methodology should include all the aspects which determine energy efficiency and not just the quality of the building's insulation. This integrated approach should take account of aspects such as heating and cooling installations, lighting installations, the position and orientation of the building, heat recovery, etc.

The minimum standards for buildings are calculated on the basis of the above methodology. The Member States are responsible for setting the minimum standards.

Scope

The Directive concerns the residential sector and the tertiary sector (offices, public buildings, etc.). The scope of the provisions on certification does not, however, include some buildings, such as historic buildings, industrial sites, etc. It covers all aspects of energy efficiency in buildings in an attempt to establish a truly integrated approach.

The Directive does not lay down measures on moveable equipment such as household appliances. Measures on labelling and mandatory minimum efficiency requirements have already been implemented or are envisaged in the Action Plan for Energy Efficiency.

Certificates, minimum standards and inspections

Energy performance certificates should be made available when buildings are constructed, sold or rented out.

The Directive specifically mentions rented buildings with the aim of ensuring that the owner, who does not normally pay the charges for energy expenditure, should take the necessary action. Furthermore, the Directive states that occupants of buildings should be enabled to regulate their own consumption of heat and hot water, in so far as such measures are cost effective.

The Member States are responsible for drawing up the minimum standards. They will also ensure that the certification and inspection of buildings are carried out by qualified and independent personnel.

The Commission, with the assistance of a committee, is responsible for adapting the Annex to technical progress. The Annex contains the framework for the calculation of energy performances of buildings and the requirements for the inspection of boilers and of central air conditioning systems.

Background

The Directive forms part of the Community initiatives on climate change (commitments under the Kyoto Protocol) and security of supply (the Green Paper on security of supply). Firstly, the Community is increasingly dependent on external energy sources and, secondly, greenhouse gas emissions are on the increase. The Community can have little influence on energy supply but can influence energy demand. One possible solution to both the above problems is to reduce energy consumption by improving energy efficiency.

Energy consumption for buildings-related services accounts for approximately one third of total EU energy consumption. The Commission considers that, with initiatives in this area, significant energy savings can be achieved, thus helping to attain objectives on climate change and security of supply. Community-level measures must be framed in order to deal with such Community-level challenges.

This Directive is a follow-up to the measures on boilers (92/42/EEC), construction products (89/106/EEC) and SAVE programme provisions on buildings.

Though there is already a directive on the energy certification of buildings (Directive 93/76/EEC repealed by Directive 2006/23/32/EC), it was adopted in a different political context before the Kyoto agreement and the uncertainties with the security of energy supply in the Union. It does not have the same objectives as Directive 2002/91/EC. The latter is an additional instrument, proposing concrete action to fill any existing gaps.

With GEL more heat at the lowest cost

**A state-of-the-art system
will allow you to save money...**

and you customer will appreciate that!





THE INTERNATIONAL CERTIFICATION NETWORK

CERTIFICATE

IQNet and its partner
CISQ/IMQ-CSQ
hereby certify that the organization

GEL SRL
VIA ENZO FERRARI 1 - 60022 CASTELFIDARDO (AN)

for the following field of activities
production, installation, management, maintenance and assistance of water systems and
treatment systems. Design, production and assistance of equipment for water treatment,
of thermal systems and development and production of related chemical products

Refer to quality manual for details of applications to ISO 9001:2008 requirements

has implemented and maintains a
Quality Management System
which fulfills the requirements of the following standard

ISO 9001:2008

Valid from: 2015 - 12 - 05

Expiry date: 2018 - 12 - 09

Registration Number: IT - 68689

Validity of the certificate can be verified at <http://www.cisq.com> or by e-mail to fedoisq@cisq.com

Michael Drechsel
President of IQNET



Ing. Claudio Provetti
President of CISQ

IQNet Partners*:
AIB-Certification France AIB-Vincotte International Belgium APCER Portugal CCC Cyprus
China CQM China CQS Czech Republic Cro Cert Croatia DQS Holding GmbH Germany
Venezuela ICONTEC Colombia IMNC Mexico Inspecta Certification Finland INTECO Costa Rica
Korea MIRTEC Greece MSZT Hungary Nemko AS Norway NSAI Ireland PCBC Poland
RK Russia SIGE Mexico SII Israel SIQ Slovenia SIRIM QAS International Malaysia
SRAC Romania TEST St Petersburg Russia TSE Turkey YUQS Serbia
in the USA by: AFNOR Certification, CISQ, DQS Holding GmbH and NSAI Inc.
at the time of issue of this certificate. Updated information is available under www.iqnet-certification.com



CERTIFICATO N. 9120.GEL1
CERTIFICATE N.

SI CERTIFICA CHE IL SISTEMA DI QUALITA' DI
WE HEREBY CERTIFY THAT THE QUALITY SYSTEM OPERATED BY
GEL SRL

VIA ENZO FERRARI 1 - 60022 CASTELFIDARDO (AN)

UNITA' OPERATIVE
OPERATIVE UNITS

VIA ENZO FERRARI 1 - 60022 CASTELFIDARDO (AN)
Operazioni esterne

E' CONFORME ALLA NORMA
IS IN COMPLIANCE WITH THE STANDARD

ISO 9001:2008

PER LE SEGUENTI ATTIVITA'
FOR THE FOLLOWING ACTIVITIES

Progettazione, costruzione, installazione, conduzione e manutenzione di impianti idrici e
per il trattamento delle acque, Progettazione, produzione ed assistenza di apparecchi per il
trattamento delle acque, per la manutenzione degli impianti termici, sviluppo e produzione
dei relativi prodotti chimici
Design, construction, installation, management, maintenance and assistance of water systems and
water treatment systems. Design, production and assistance of equipment for water treatment,
maintenance of thermal systems and development and production of related chemical products

Riferirsi al manuale della qualità per l'applicabilità dei requisiti della norma ISO 9001:2008
Refer to quality manual for details of applications to ISO 9001:2008 requirements
Sistema di gestione per la qualità conforme alla norma ISO 9001:2008 validato secondo le prescrizioni del Regolamento Tecnico
RT-05. La presente certificazione si intende riferita agli aspetti gestionali dell'impresa nel suo complesso ed è
utilizzabile ai fini della qualificazione delle imprese di costruzione ai sensi dell'articolo 40 della legge 163 del 12 aprile 2006 e
successive modificazioni e del DPR. 5 ottobre 2010, n. 207

IL PRESENTE CERTIFICATO E' SOGGETTO AL RISPETTO
DEL REGOLAMENTO PER LA CERTIFICAZIONE DEI SISTEMI DI GESTIONE
THE USE AND THE VALIDITY OF THE CERTIFICATE SHALL SATISFY THE
REQUIREMENTS OF THE RULES FOR CERTIFICATION OF MANAGEMENT SYSTEMS

DATE:	PRIMA CERTIFICAZIONE FIRST CERTIFICATION	EMISSIONE CORRENTE CURRENT ISSUE	SCADENZA EXPIRY
	2009-12-10	2015-12-05	2018-12-09

IMQ S.p.A. - VIA QUINTILIANO, 43 - 20138 MILANO



IAF: 28, 19, 27

ISO 9001, ISO 14001, ISO 22000, ISO 26000, ISO 27001, ISO 29001, ISO 31000, ISO 34000, ISO 38000, ISO 40000, ISO 45000, ISO 50000, ISO 55000, ISO 59000, ISO 63000, ISO 64000, ISO 68000, ISO 70000, ISO 73000, ISO 77000, ISO 80000, ISO 84000, ISO 88000, ISO 90000, ISO 93000, ISO 96000, ISO 99000, ISO 100000, ISO 105000, ISO 110000, ISO 115000, ISO 120000, ISO 125000, ISO 130000, ISO 135000, ISO 140000, ISO 145000, ISO 150000, ISO 155000, ISO 160000, ISO 165000, ISO 170000, ISO 175000, ISO 180000, ISO 185000, ISO 190000, ISO 195000, ISO 200000, ISO 205000, ISO 210000, ISO 215000, ISO 220000, ISO 225000, ISO 230000, ISO 235000, ISO 240000, ISO 245000, ISO 250000, ISO 255000, ISO 260000, ISO 265000, ISO 270000, ISO 275000, ISO 280000, ISO 285000, ISO 290000, ISO 295000, ISO 300000, ISO 305000, ISO 310000, ISO 315000, ISO 320000, ISO 325000, ISO 330000, ISO 335000, ISO 340000, ISO 345000, ISO 350000, ISO 355000, ISO 360000, ISO 365000, ISO 370000, ISO 375000, ISO 380000, ISO 385000, ISO 390000, ISO 395000, ISO 400000, ISO 405000, ISO 410000, ISO 415000, ISO 420000, ISO 425000, ISO 430000, ISO 435000, ISO 440000, ISO 445000, ISO 450000, ISO 455000, ISO 460000, ISO 465000, ISO 470000, ISO 475000, ISO 480000, ISO 485000, ISO 490000, ISO 495000, ISO 500000, ISO 505000, ISO 510000, ISO 515000, ISO 520000, ISO 525000, ISO 530000, ISO 535000, ISO 540000, ISO 545000, ISO 550000, ISO 555000, ISO 560000, ISO 565000, ISO 570000, ISO 575000, ISO 580000, ISO 585000, ISO 590000, ISO 595000, ISO 600000, ISO 605000, ISO 610000, ISO 615000, ISO 620000, ISO 625000, ISO 630000, ISO 635000, ISO 640000, ISO 645000, ISO 650000, ISO 655000, ISO 660000, ISO 665000, ISO 670000, ISO 675000, ISO 680000, ISO 685000, ISO 690000, ISO 695000, ISO 700000, ISO 705000, ISO 710000, ISO 715000, ISO 720000, ISO 725000, ISO 730000, ISO 735000, ISO 740000, ISO 745000, ISO 750000, ISO 755000, ISO 760000, ISO 765000, ISO 770000, ISO 775000, ISO 780000, ISO 785000, ISO 790000, ISO 795000, ISO 800000, ISO 805000, ISO 810000, ISO 815000, ISO 820000, ISO 825000, ISO 830000, ISO 835000, ISO 840000, ISO 845000, ISO 850000, ISO 855000, ISO 860000, ISO 865000, ISO 870000, ISO 875000, ISO 880000, ISO 885000, ISO 890000, ISO 895000, ISO 900000, ISO 905000, ISO 910000, ISO 915000, ISO 920000, ISO 925000, ISO 930000, ISO 935000, ISO 940000, ISO 945000, ISO 950000, ISO 955000, ISO 960000, ISO 965000, ISO 970000, ISO 975000, ISO 980000, ISO 985000, ISO 990000, ISO 995000, ISO 1000000, ISO 1005000, ISO 1010000, ISO 1015000, ISO 1020000, ISO 1025000, ISO 1030000, ISO 1035000, ISO 1040000, ISO 1045000, ISO 1050000, ISO 1055000, ISO 1060000, ISO 1065000, ISO 1070000, ISO 1075000, ISO 1080000, ISO 1085000, ISO 1090000, ISO 1095000, ISO 1100000, ISO 1105000, ISO 1110000, ISO 1115000, ISO 1120000, ISO 1125000, ISO 1130000, ISO 1135000, ISO 1140000, ISO 1145000, ISO 1150000, ISO 1155000, ISO 1160000, ISO 1165000, ISO 1170000, ISO 1175000, ISO 1180000, ISO 1185000, ISO 1190000, ISO 1195000, ISO 1200000, ISO 1205000, ISO 1210000, ISO 1215000, ISO 1220000, ISO 1225000, ISO 1230000, ISO 1235000, ISO 1240000, ISO 1245000, ISO 1250000, ISO 1255000, ISO 1260000, ISO 1265000, ISO 1270000, ISO 1275000, ISO 1280000, ISO 1285000, ISO 1290000, ISO 1295000, ISO 1300000, ISO 1305000, ISO 1310000, ISO 1315000, ISO 1320000, ISO 1325000, ISO 1330000, ISO 1335000, ISO 1340000, ISO 1345000, ISO 1350000, ISO 1355000, ISO 1360000, ISO 1365000, ISO 1370000, ISO 1375000, ISO 1380000, ISO 1385000, ISO 1390000, ISO 1395000, ISO 1400000, ISO 1405000, ISO 1410000, ISO 1415000, ISO 1420000, ISO 1425000, ISO 1430000, ISO 1435000, ISO 1440000, ISO 1445000, ISO 1450000, ISO 1455000, ISO 1460000, ISO 1465000, ISO 1470000, ISO 1475000, ISO 1480000, ISO 1485000, ISO 1490000, ISO 1495000, ISO 1500000, ISO 1505000, ISO 1510000, ISO 1515000, ISO 1520000, ISO 1525000, ISO 1530000, ISO 1535000, ISO 1540000, ISO 1545000, ISO 1550000, ISO 1555000, ISO 1560000, ISO 1565000, ISO 1570000, ISO 1575000, ISO 1580000, ISO 1585000, ISO 1590000, ISO 1595000, ISO 1600000, ISO 1605000, ISO 1610000, ISO 1615000, ISO 1620000, ISO 1625000, ISO 1630000, ISO 1635000, ISO 1640000, ISO 1645000, ISO 1650000, ISO 1655000, ISO 1660000, ISO 1665000, ISO 1670000, ISO 1675000, ISO 1680000, ISO 1685000, ISO 1690000, ISO 1695000, ISO 1700000, ISO 1705000, ISO 1710000, ISO 1715000, ISO 1720000, ISO 1725000, ISO 1730000, ISO 1735000, ISO 1740000, ISO 1745000, ISO 1750000, ISO 1755000, ISO 1760000, ISO 1765000, ISO 1770000, ISO 1775000, ISO 1780000, ISO 1785000, ISO 1790000, ISO 1795000, ISO 1800000, ISO 1805000, ISO 1810000, ISO 1815000, ISO 1820000, ISO 1825000, ISO 1830000, ISO 1835000, ISO 1840000, ISO 1845000, ISO 1850000, ISO 1855000, ISO 1860000, ISO 1865000, ISO 1870000, ISO 1875000, ISO 1880000, ISO 1885000, ISO 1890000, ISO 1895000, ISO 1900000, ISO 1905000, ISO 1910000, ISO 1915000, ISO 1920000, ISO 1925000, ISO 1930000, ISO 1935000, ISO 1940000, ISO 1945000, ISO 1950000, ISO 1955000, ISO 1960000, ISO 1965000, ISO 1970000, ISO 1975000, ISO 1980000, ISO 1985000, ISO 1990000, ISO 1995000, ISO 2000000, ISO 2005000, ISO 2010000, ISO 2015000, ISO 2020000, ISO 2025000, ISO 2030000, ISO 2035000, ISO 2040000, ISO 2045000, ISO 2050000, ISO 2055000, ISO 2060000, ISO 2065000, ISO 2070000, ISO 2075000, ISO 2080000, ISO 2085000, ISO 2090000, ISO 2095000, ISO 2100000, ISO 2105000, ISO 2110000, ISO 2115000, ISO 2120000, ISO 2125000, ISO 2130000, ISO 2135000, ISO 2140000, ISO 2145000, ISO 2150000, ISO 2155000, ISO 2160000, ISO 2165000, ISO 2170000, ISO 2175000, ISO 2180000, ISO 2185000, ISO 2190000, ISO 2195000, ISO 2200000, ISO 2205000, ISO 2210000, ISO 2215000, ISO 2220000, ISO 2225000, ISO 2230000, ISO 2235000, ISO 2240000, ISO 2245000, ISO 2250000, ISO 2255000, ISO 2260000, ISO 2265000, ISO 2270000, ISO 2275000, ISO 2280000, ISO 2285000, ISO 2290000, ISO 2295000, ISO 2300000, ISO 2305000, ISO 2310000, ISO 2315000, ISO 2320000, ISO 2325000, ISO 2330000, ISO 2335000, ISO 2340000, ISO 2345000, ISO 2350000, ISO 2355000, ISO 2360000, ISO 2365000, ISO 2370000, ISO 2375000, ISO 2380000, ISO 2385000, ISO 2390000, ISO 2395000, ISO 2400000, ISO 2405000, ISO 2410000, ISO 2415000, ISO 2420000, ISO 2425000, ISO 2430000, ISO 2435000, ISO 2440000, ISO 2445000, ISO 2450000, ISO 2455000, ISO 2460000, ISO 2465000, ISO 2470000, ISO 2475000, ISO 2480000, ISO 2485000, ISO 2490000, ISO 2495000, ISO 2500000, ISO 2505000, ISO 2510000, ISO 2515000, ISO 2520000, ISO 2525000, ISO 2530000, ISO 2535000, ISO 2540000, ISO 2545000, ISO 2550000, ISO 2555000, ISO 2560000, ISO 2565000, ISO 2570000, ISO 2575000, ISO 2580000, ISO 2585000, ISO 2590000, ISO 2595000, ISO 2600000, ISO 2605000, ISO 2610000, ISO 2615000, ISO 2620000, ISO 2625000, ISO 2630000, ISO 2635000, ISO 2640000, ISO 2645000, ISO 2650000, ISO 2655000, ISO 2660000, ISO 2665000, ISO 2670000, ISO 2675000, ISO 2680000, ISO 2685000, ISO 2690000, ISO 2695000, ISO 2700000, ISO 2705000, ISO 2710000, ISO 2715000, ISO 2720000, ISO 2725000, ISO 2730000, ISO 2735000, ISO 2740000, ISO 2745000, ISO 2750000, ISO 2755000, ISO 2760000, ISO 2765000, ISO 2770000, ISO 2775000, ISO 2780000, ISO 2785000, ISO 2790000, ISO 2795000, ISO 2800000, ISO 2805000, ISO 2810000, ISO 2815000, ISO 2820000, ISO 2825000, ISO 2830000, ISO 2835000, ISO 2840000, ISO 2845000, ISO 2850000, ISO 2855000, ISO 2860000, ISO 2865000, ISO 2870000, ISO 2875000, ISO 2880000, ISO 2885000, ISO 2890000, ISO 2895000, ISO 2900000, ISO 2905000, ISO 2910000, ISO 2915000, ISO 2920000, ISO 2925000, ISO 2930000, ISO 2935000, ISO 2940000, ISO 2945000, ISO 2950000, ISO 2955000, ISO 2960000, ISO 2965000, ISO 2970000, ISO 2975000, ISO 2980000, ISO 2985000, ISO 2990000, ISO 2995000, ISO 3000000, ISO 3005000, ISO 3010000, ISO 3015000, ISO 3020000, ISO 3025000, ISO 3030000, ISO 3035000, ISO 3040000, ISO 3045000, ISO 3050000, ISO 3055000, ISO 3060000, ISO 3065000, ISO 3070000, ISO 3075000, ISO 3080000, ISO 3085000, ISO 3090000, ISO 3095000, ISO 3100000, ISO 3105000, ISO 3110000, ISO 3115000, ISO 3120000, ISO 3125000, ISO 3130000, ISO 3135000, ISO 3140000, ISO 3145000, ISO 3150000, ISO 3155000, ISO 3160000, ISO 3165000, ISO 3170000, ISO 3175000, ISO 3180000, ISO 3185000, ISO 3190000, ISO 3195000, ISO 3200000, ISO 3205000, ISO 3210000, ISO 3215000, ISO 3220000, ISO 3225000, ISO 3230000, ISO 3235000, ISO 3240000, ISO 3245000, ISO 3250000, ISO 3255000, ISO 3260000, ISO 3265000, ISO 3270000, ISO 3275000, ISO 3280000, ISO 3285000, ISO 3290000, ISO 3295000, ISO 3300000, ISO 3305000, ISO 3310000, ISO 3315000, ISO 3320000, ISO 3325000, ISO 3330000, ISO 3335000, ISO 3340000, ISO 3345000, ISO 3350000, ISO 3355000, ISO 3360000, ISO 3365000, ISO 3370000, ISO 3375000, ISO 3380000, ISO 3385000, ISO 3390000, ISO 3395000, ISO 3400000, ISO 3405000, ISO 3410000, ISO 3415000, ISO 3420000, ISO 3425000, ISO 3430000, ISO 3435000, ISO 3440000, ISO 3445000, ISO 3450000, ISO 3455000, ISO 3460000, ISO 3465000, ISO 3470000, ISO 3475000, ISO 3480000, ISO 3485000, ISO 3490000, ISO 3495000, ISO 3500000, ISO 3505000, ISO 3510000, ISO 3515000, ISO 3520000, ISO 3525000, ISO 3530000, ISO 3535000, ISO 3540000, ISO 3545000, ISO 3550000, ISO 3555000, ISO 3560000, ISO 3565000, ISO 3570000, ISO 3575000, ISO 3580000, ISO 3585000, ISO 3590000, ISO 3595000, ISO 3600000, ISO 3605000, ISO 3610000, ISO 3615000, ISO 3620000, ISO 3625000, ISO 3630000, ISO 3635000, ISO 3640000, ISO 3645000, ISO 3650000, ISO 3655000, ISO 3660000, ISO 3665000, ISO 3670000, ISO 3675000, ISO 3680000, ISO 3685000, ISO 3690000, ISO 3695000, ISO 3700000, ISO 3705000, ISO 3710000, ISO 3715000, ISO 3720000, ISO 3725000, ISO 3730000, ISO 3735000, ISO 3740000, ISO 3745000, ISO 3750000, ISO 3755000, ISO 3760000, ISO 3765000, ISO 3770000, ISO 3775000, ISO 3780000, ISO 3785000, ISO 3790000, ISO 3795000, ISO 3800000, ISO 3805000, ISO 3810000, ISO 3815000, ISO 3820000, ISO 3825000, ISO 3830000, ISO 3835000, ISO 3840000, ISO 3845000, ISO 3850000, ISO 3855000, ISO 3860000, ISO 3865000, ISO 3870000, ISO 3875000, ISO 3880000, ISO 3885000, ISO 3890000, ISO 3895000, ISO 3900000, ISO 3905000, ISO 3910000, ISO 3915000, ISO 3920000, ISO 3925000, ISO 3930000, ISO 3935000, ISO 3940000, ISO 3945000, ISO 3950000, ISO 3955000, ISO 3960000, ISO 3965000, ISO 3970000, ISO 3975000, ISO 3980000, ISO 3985000, ISO 3990000, ISO 3995000, ISO 4000000, ISO 4005000, ISO 4010000, ISO 4015000, ISO 4020000, ISO 4025000, ISO 4030000, ISO 4035000, ISO 4040000, ISO 4045000, ISO 4050000, ISO 4055000, ISO 4060000, ISO 4065000, ISO 4070000, ISO 4075000, ISO 4080000, ISO 4085000, ISO 4090000, ISO 4095000, ISO 4100000, ISO 4105000, ISO 4110000, ISO 4115000, ISO 4120000, ISO 4125000, ISO 4130000, ISO 4135000, ISO 4140000, ISO 4145000, ISO 4150000, ISO 4155000, ISO 4160000, ISO 4165000, ISO 4170000, ISO 4175000, ISO 4180000, ISO 4185000, ISO 4190000, ISO 4195000, ISO 4200000, ISO 4205000, ISO 4210000, ISO 4215000, ISO 4220000, ISO 4225000, ISO 4230000, ISO 4235000, ISO 4240000, ISO 4245000, ISO 4250000, ISO 4255000, ISO 4260000, ISO 4265000, ISO 4270000, ISO 4275000, ISO 4280000, ISO 4285000, ISO 4290000, ISO 4295000, ISO 4300000, ISO 4305000, ISO 4310000, ISO 4315000, ISO 4320000, ISO 4325000, ISO 4330000, ISO 4335000, ISO 4340000, ISO 4345000, ISO 4350000, ISO 4355000, ISO 4360000, ISO 4365000, ISO 4370000, ISO 4375000, ISO 4380000, ISO 4385000, ISO 4390000, ISO 4395000, ISO 4400000, ISO 4405000, ISO 4410000, ISO 4415000, ISO 4420000, ISO 4425000, ISO 4430000, ISO 4435000, ISO 4440000, ISO 4445000, ISO 4450000, ISO 4455000, ISO 4460000, ISO 4465000, ISO 4470000, ISO 4475000, ISO 4480000, ISO 4485000, ISO 4490000, ISO 4495000, ISO 4500000, ISO 4505000, ISO 4510000, ISO 4515000, ISO 4520000, ISO 4525000, ISO 4530000, ISO 4535000, ISO 4540000, ISO 4545000, ISO 4550000, ISO 4555000, ISO 4560000, ISO 4565000, ISO 4570000, ISO 4575000, ISO 4580000, ISO 4585000, ISO 4590000, ISO 4595000, ISO 4600000, ISO 4605000, ISO 4610000, ISO 4615000, ISO 4620000, ISO 4625000, ISO 4630000, ISO 4635000, ISO 4640000, ISO 4645000, ISO 4650000, ISO 4655000, ISO 4660000, ISO 4665000, ISO 4670000, ISO 4675000, ISO 4680000, ISO 4685000, ISO 4690000, ISO 4695000, ISO 4700000, ISO 4705000, ISO 4710000, ISO 4715000, ISO 4720000, ISO 4725000, ISO 4730000, ISO 4735000, ISO 4740000, ISO 4745000, ISO 4750000, ISO 4755000, ISO 4760000, ISO 4765000, ISO 4770000, ISO 4775000, ISO 4780000, ISO 4785000, ISO 4790000, ISO 4795000, ISO 4800000, ISO 4805000, ISO 4810000, ISO 4815000, ISO 4820000, ISO 4825000, ISO 4830000, ISO 4835000, ISO 4840000, ISO 4845000, ISO 4850000, ISO 4855000, ISO 4860000, ISO 4865000, ISO 4870000, ISO 4875000, ISO 4880000, ISO 4885000, ISO 4890000, ISO 4895000, ISO 4900000, ISO 4905000, ISO 4910000, ISO 4915000, ISO 4920000, ISO 4925000, ISO 4930000, ISO 4935000, ISO 4940000, ISO 4945000, ISO 4950000, ISO 4955000, ISO 4960000, ISO 4965000, ISO 4970000, ISO 4975000, ISO 4980000, ISO 4985000, ISO 4990000, ISO 4995000, ISO 5000000, ISO 5005000, ISO 5010000, ISO 5015000, ISO 5020000, ISO 5025000, ISO 5030000, ISO 5035000, ISO 5040000, ISO 5045000, ISO 5050000, ISO 5055000, ISO 5060000, ISO 5065000, ISO 5070000, ISO 5075000, ISO 5080000, ISO 5085000, ISO 5090000, ISO 5095000, ISO 5100000, ISO 5105000, ISO 5

Contacts

EXPORT

Aldo Cirioni

Export Manager

+39 338 6717682 - a.cirioni@gel.it

Matteo Mercuri

Export Manager

+39 328 3895080 - m.mercuri@gel.it

ITALY

Ivan Businaro

Area Manager for Central-Northern Italy

+39 335 7151836 - i.businaro@gel.it

Francesco M. Cento

Area Manager for Central-Southern Italy

+39 335 1718017 - f.cento@gel.it



Technical Promoter for Central-Northern Italy	Riccardo Monelli - +39 328 8327565 - r.monelli@gel.it
Technical Promoter for Central-Southern Italy	Leandro Antonini - +39 337 1519090 - l.antonini@gel.it
Design Studio Manager	Eng. Giulia Giancarli - +39 366 5717995 - g.giancarli@gel.it
Technical Department	tel. +39 071 7827 - Fax +39 071 7808175 - tecnico@gel.it
Italian Sales Department	tel. +39 071 7827 - Fax +39 071 7808175 - commerciale@gel.it
Export Department	tel. +39 071 7827 - Fax +39 071 7808175 - export@gel.it

General Sales Conditions

GENERAL SALES CONDITIONS

- The following General Sales Conditions (GSC) are entirely applied to all sales. Any different agreement has to be written and signed by GEL and the buyer.
- Prices are exclusive of VAT, which for export sales has to be paid by the purchaser in his own country.
- GEL reserve the right to update the prices of this price list, with immediate starting date, according to possible international economic trends considerably affecting the price of raw materials.
- For orders below € 200,00 invoicing fees will be charged.
- GEL commitments towards all orders received are accepted only with our written order confirmation and/or our pro-forma invoice.
- Products, even after delivery, remain property of the seller until the payment obligations have been entirely fulfilled. Therefore, the purchaser shall have the obligation to take all necessary steps to constitute, in the country where the products are located after delivery, a valid property reservation in the most extensive form permitted or to create a similar form of guarantee in favour of GEL.
- The adhesion to the present general conditions as well as the sequent contracts and behaviour of GEL and the purchaser, if not otherwise agreed upon in writing, do not imply the granting to the purchaser of any exclusive right, the existence of any distributorship relation, commission or mandate, with or without agency, nor granting to the purchaser of the right to use, in any form, the trade-marks or distinctive signs of the purchaser.
- Technical data referred to catalogues and / or price list have the mere intention to supply general information.
- Products are in conformity to the European norms. It is responsibility and duty of the purchaser to take care about different norms or laws in his own country and to inform GEL before sending an order.
- GEL reserve the right to modify any products in compliance with their functions, without prior notice.
- GEL will apply to all sales the clause related to the "Force Majeure".
- In case one or more of these clauses should be in contrast with the laws, the parties will have to agree new conditions again without compromising the remaining clauses of the GSC.
- Even in the case GEL will not apply one of the rights of these GSC, GEL will anyway have the right to apply it anytime in the future.

PAYMENTS

- Payments shall be made only to GEL according to the conditions agreed upon in the order.
- Payment conditions: credit with payment at 30-60 days upon GEL agreement with the insurance company;
- L/C irrevocable and confirmed at sight from a primary international bank; bank guarantee at first demand.
- In case of delayed payment, the Legislative Decree no. 231/02 - Directive 2000/35/CE will be applied.

TRANSPORT and DELIVERY

- Quotations are net and Ex-Works Castelfidardo (AN) Italy - Incoterms® 2010.
- All shipment risks are the customer's responsibility.
- Delivery time: depending on the order; the average is 10 working days, except for the products of the Gelpur OS line and Industrial Water Solutions 2012 Price List.
- As indicated in GEL Commercial Sales Conditions or Order Confirmations or Offers.

RETURNS & CLAIMS

- All claims shall be notified to GEL in writing within 5 (five) days upon receipt of the goods.
- Claims about damaged / missing goods are accepted only if the delivery note has been signed with reservation upon receipt of the goods.

WARRANTY

- GEL guarantee that products are in conformity to the orders received and free from defects.

E.U. COUNTRIES

According to the European Warranty Directive 1999/44/EC, products are guaranteed for a period of 24 (twenty-four) months to the final user, while no warranty period is provided for "Business to Business" supplies.

GEL intend to observe the warranty period of 24 (twenty-four) months even for "Business to Business" supplies in order to offer a further service to its distributors.

For this reason, GEL and the distributors agree:

1. When the distributor receives the product back from its own customer, he has to collect it in its own premises.
The distributor has to carry out a first analysis and decide whether to repair it or replace it under warranty.
 - 1.1. Repairing the product means that he has to inform GEL about the necessary pieces and the problem found after the analysis in order to require a new piece to be sent;
 - 1.2. Replacing the product means:
 - a) Asking the authorisation to GEL.
 - b) Requiring a new piece to be sent.
 - c) Keeping the replaced piece for 6 months stored in its own premises to leave GEL the possibility to examine the situation under the technical point of view related to the information received.
 - d) Send the piece to GEL afterwards if required.
2. GEL are responsible to give to its own distributor:
 - a) The technical formation in its own premises or in the distributor's one.
 - b) To supply the distributor a technical manual in English language.
 - c) Send the authorised piece/product to be replaced under warranty.
3. Transport costs will be paid by the sender.
4. Any eventual defect will not imply cancellation of the contract.

THIS WARRANTY IS NOT VALID:

- if the installation of the product has been not properly carried out or if the failure has been caused by wrong operations;
- if the product has been repaired, disassembled or tampered with by people not authorised by GEL;
- if the failure has been caused by mistakes in electrical connection, missing or improper protection;
- if the product has been submitted to any use (overload) beyond the limits indicated in the rating plate or used in other conditions not allowed;
- if the product has been used with liquids which are abrasive, corrosive or different from those allowed;
- if the connections have worn out due to the natural wearing (if the periodical compulsory maintenance operations indicated in the user's manual have not been carried out).

PRODUCT LIABILITY

According to the European Warranty Directive 85/374/EC.

COUNTRIES NOT BELONGING TO THE E.U.

For countries not belonging to the European Union the same conditions as the ones in E.U. countries will be applied.

PRODUCT IMAGES

- Product images are for illustrative purposes only and may differ from the actual product in color and size.
- The information contained in this price list has been carefully checked. GEL cannot be held liable for any inaccuracies and reserve the right to make changes to the products without notice.

COMPETENT COURT

Any dispute shall be settled at the Court of Ancona (Italy).

NOTICE

Upon request GEL supply Price List in Excel or PDF format as well as Spare Parts Price List. The information contained in this document have been carefully checked. GEL decline any responsibility for possible inaccuracies and reserve the right to modify products without prior notice.

Notes



FREE SERVICE ON +39 071 7827240

CALL US NOW

we have the right solution for you!

Our experts are always ready to help installers, plumbers and designers.

USE

the unique software for water treatment

on www.gel.it

**Progetto
acqua**

DOWNLOAD

our video tutorials

send a text with **GEL** to the no.

+39 351 510 59 49



www.gel.it